

CITY OF CORCORAN

STANDARD DETAIL PLATES

NOTES:

1. STANDARD DETAILS PLATES ARE UPDATE ANNUALLY. LATEST VERSION WILL BE ENFORCED.
2. REFERENCE ON CITY PLATES ARE TO MNDOT 2020 EDITION SPECIFICATIONS.



2025 Standard Detail Plates

COVER

LAST REVISION:
JANUARY 2025



PLATE NO.
COVER-01

GENERAL

GEN-1A	STANDARD DETAILS INDEX
GEN-1B	STANDARD DETAILS INDEX
GEN-1C	STANDARD DETAILS INDEX
GEN-2	STRUCTURE MARKER SIGNS
GEN-3	WETLAND BUFFER SIGN
GEN-4	PIPE MATERIAL AND TESTING REQUIREMENTS
GEN-5	UTILITY LAYOUT
GEN-6	BUILDING PERMIT & CERTIFICATE OF SURVEY SUBMISSION REQUIREMENTS

SECTION 1 - SANITARY SEWER

SAN-1	SANITARY SEWER MANHOLE
SAN-2	SANITARY SEWER JUNCTION MANHOLE
SAN-3	SANITARY SEWER JUNCTION MANHOLE WITH REINFORCED TOP SLAB
SAN-4	DROP INLET MANHOLE
SAN-5	WATER TIGHT CASTING FOR SANITARY SEWER MANHOLE
SAN-6	SANITARY SEWER SERVICE CONNECTION
SAN-7	SANITARY SEWER SERVICE RISER
SAN-8	SANITARY SEWER PVC SEWER LINE CLEANOUTS

SECTION 2 - STORM SEWER

STO-1	STORM SEWER MANHOLE
STO-2	STORM SEWER JUNCTION MANHOLE
STO-3	STORM SEWER JUNCTION MANHOLE WITH REINFORCED TOP SLAB
STO-4	STORM SEWER JUNCTION MANHOLE WITH REINFORCED TOP SLAB AND SUMP
STO-5	CATCH BASIN MANHOLE
STO-6	CATCH BASIN MANHOLE WITH SUMP
STO-7	2'X3' CATCHBASIN
STO-8	DOUBLE CATCHBASIN - CATCHBASIN MANHOLE WITH 2'X3' CATCHBASIN
STO-9	CATCHBASIN MANHOLE IN GREENSPACE
STO-10	PRECAST 27" SHALLOW DEPTH BEEHIVE
STO-11	FLARED END SECTION AND TRASH GUARD
STO-11A	STORM SEWER PILING & CONCRETE END SECTION
STO-12	RIPRAP AT OUTLETS
STO-13	TYPICAL POND EOF
STO-14	ENERGY DISSIPATER AND TRASH GUARDS
STO-15	BACKYARD DRAIN TILE FOR SUMP CONNECTION
STO-15A	PERFORATED DRAINTILE SWALE INSTALLATION
STO-16	RURAL RESIDENTIAL DRIVEWAY CULVERT
STO-17	STORM SEWER SKIMMER STRUCTURE
STO-18	SKIMMER STRUCTURE WITH CONCRETE BAFFLE WALL
STO-19	OUTLET CONTROL STRUCTURE
STO-19A	TYPICAL MAINTENANCE ACCESS BENCH
STO-20	TYPICAL FILTRATION BENCH
STO-21	TYPICAL FILTRATION TRENCH
STO-22	DITCH STABILIZATION
STO-23	RIP RAP AND GRADE CONTROL
STO-24	PVC DRAINTILE CLEANOUTS
STO-24A	SUMP SERVICE CONNECTION
STO-25	"MINI-TEE" MANHOLE



2025 Standard Detail Plates

STANDARD DETAILS INDEX

LAST REVISION:
01/02/2025



PLATE NO.
GEN-1A

SECTION 3 - WATERMAIN

WAT-1	WATER HYDRANT
WAT-2	GATE VALVE AND BOX INSTALLATION
WAT-3	BUTTERFLY VALVE AND BOX INSTALLATION
WAT-4	WATERMAIN WET TAP
WAT-5	COMPRESSION WATER SERVICE CONNECTION
WAT-6	COPPER WATER SERVICE CONNECTION
WAT-7	CONCRETE THRUST BLOCKING
WAT-8	WATERMAIN OFFSETS
WAT-9	TYPICAL GATE VALVE LAYOUT
WAT-10	PLUG WITH BLOWOFF
WAT-11	IRRIGATION SYSTEM TAP, METER, AND BACKFLOW PREVENTOR ASSEMBLY
WAT-12	WATER MAIN INSULATION
WAT-13	PACER HYDRANT DETAIL
WAT-14	PACER HYDRANT DOUBLE PUMPER DETAIL

SECTION 4 - STREETS

STR-1A	RESIDENTIAL STREET SECTION
STR-1B	RESIDENTIAL COLLECTOR STREET SECTION
STR-1C	RURAL COLLECTOR STREET SECTION
STR-1D	COMMERCIAL STREET SECTION
STR-2	RESIDENTIAL STREET DIMENSIONS
STR-3	GRAVEL ROAD
STR-4	PRIVATE DRIVE/LONG DRIVEWAY
STR-5	ROAD SUB DRAIN
STR-6	CURB AND GUTTER
STR-7	SURMOUNTABLE CURB TRANSITION AT CATCH BASIN
STR-8	B618 CURB TRANSITION AT CATCH BASIN
STR-9	CURB AND GUTTER TRANSITIONS
STR-10	RESIDENTIAL DRIVEWAY APRON
STR-11	RESIDENTIAL DRIVEWAY APRON (MOUNTABLE CURB)
STR-12	RESIDENTIAL DRIVEWAY APRON W/ S.W. (B6 CURB)
STR-13	RESIDENTIAL DRIVEWAY APRON W/ S.W. (MOUNTABLE CURB)
STR-14	COMMERCIAL CONCRETE DRIVEWAY APRON
STR-15	COMMERCIAL CONCRETE DRIVEWAY APRON W/ S.W.
STR-16	CONCRETE VALLEY GUTTER
STR-17	RESIDENTIAL DRIVEWAY APRON RURAL ROAD SECTION
STR-18	TYPICAL CUL-DE-SACS
STR-19	SIDEWALK CURB RAMP
STR-20	SIDEWALK/BIKE PATH CURB RAMP GENERAL LOCATION
STR-21	DOUBLE SIDEWALK/BIKE PATH CURB RAMP
STR-22	CONCRETE WALKS AND BITUMINOUS TRAILS
STR-23	BITUMINOUS TRAIL WITH ROOT BARRIER
STR-24	PRIVATE DEVELOPMENT TURNAROUND
STR-25	CENTER ISLAND CURB RAMP
STR-26	TEMPORARY CUL-DE-SAC
STR-27	STREET SIGN DETAIL - CONCRETE
STR-28	STREET SIGN DETAIL - BOULEVARD
STR-29	REGULATORY SIGN
STR-30	NO PARKING SIGNS



2025 Standard Detail Plates

STANDARD DETAILS INDEX

LAST REVISION:
01/02/2025



PLATE NO.
GEN-1B

SECTION 4 - STREETS

STR-31	PRIVATE DRIVE SIGN - RESIDENTIAL
STR-32	PRIVATE DRIVE SIGN - RURAL
STR-33	FUTURE THROUGH STREET SIGN
STR-34	PERMANENT BARRICADE
STR-35	SWING AWAY MAILBOX

SECTION 5 - PIPE BEDDING

BED-1	BEDDING METHODS FOR PVC
BED-2	BEDDING METHODS FOR RCP AND DIP
BED-3	IMPROVED PIPE FOUNDATION FOR RCP AND DIP

SECTION 6 - LANDSCAPING

LAN-1	DECIDUOUS TREE PLANTING
LAN-2	CONIFEROUS TREE PLANTING
LAN-3	DECIDUOUS SHRUB PLANTING
LAN-4	SODDING

SECTION 7 - EROSION CONTROL

ERO-1A	SILT FENCE MACHINE SLICED
ERO-1B	SILT FENCE HEAVY DUTY
ERO-2	EROSION CONTROL BLANKET INSTALLATION
ERO-3	FLOATING SILT CURTAIN
ERO-4A	INLET PROTECTION SILT BOX FOR CATCHBASIN
ERO-4B	INLET PROTECTION CATCH BASIN ROCK FILTER
ERO-4C	INLET PROTECTION CATCH BASIN INSERT
ERO-4D	INLET PROTECTION BEEHIVE CASTING SILT BOX
ERO-5A	DITCH CHECK: 3D VIEW FOR 5B, 5C, AND SPACING
ERO-5B	DITCH CHECKS: ROCK AND BIO WEEPER
ERO-5C	DITCH CHECKS: SMALL AND LARGE CHECK DAM
ERO-6	CONSTRUCTION ENTRANCE (ROCK)
ERO-7A	TEMPORARY SEDIMENTATION BASIN - PIPE OUTLET
ERO-7B	TEMPORARY SEDIMENTATION BASIN - STANDPIPE OUTLET
ERO-8	TEMPORARY SEDIMENT TRAP
ERO-9	TEMPORARY SEDIMENT BASIN SKIMMER
ERO-10	SLOPE TRACKING






2025 Standard Detail Plates

STANDARD DETAILS INDEX

LAST REVISION:
01/02/2025



PLATE NO.
GEN-1C

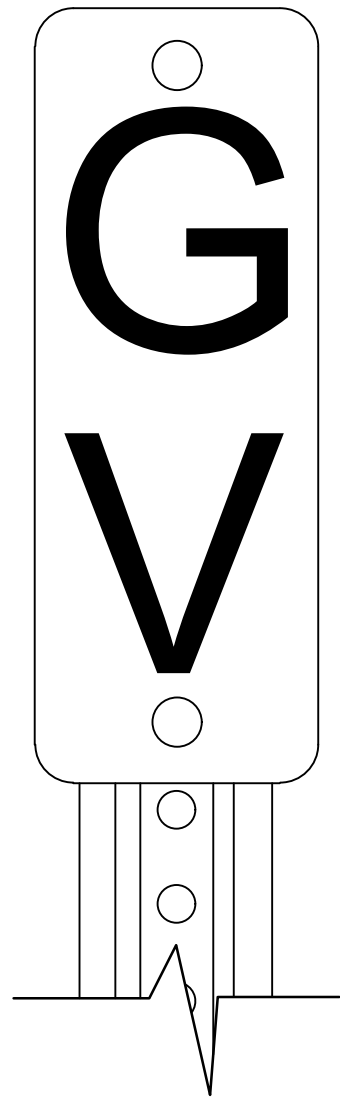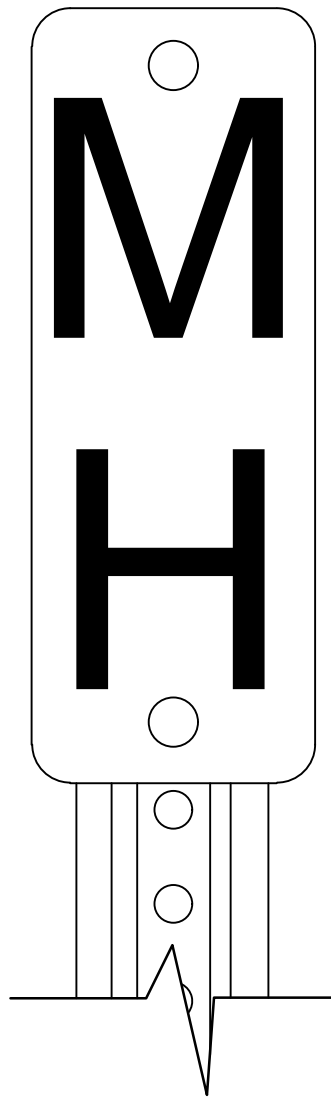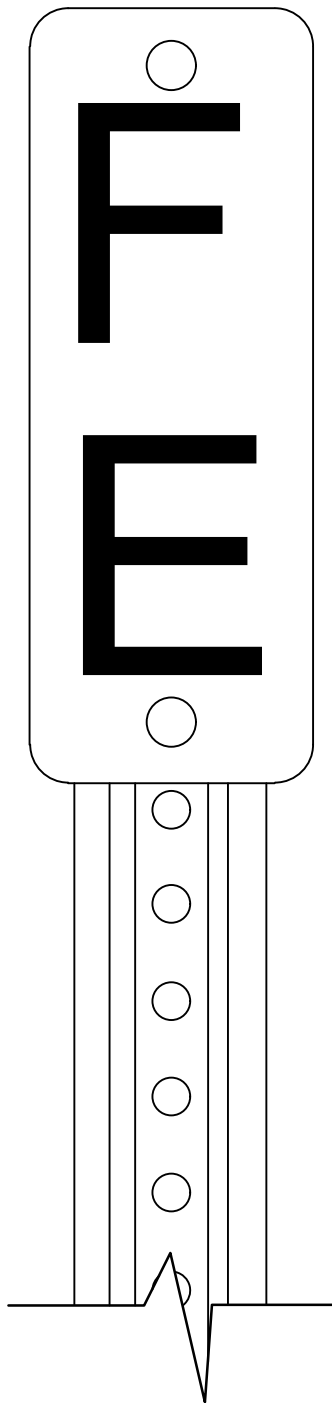

NOTES:

0.063" THICK ALUMINUM SIGN.
BLACK LETTERS ON WHITE HIGH INTENSITY
REFLECTORIZED BACKGROUND.

U-CHANNEL POST MINIMUM 3LB/FT
6-6" LONG, PAINTED GREEN.

PLACED AS DIRECTED BY CITY ENGINEER.




2025 Standard Detail Plates

STRUCTURE MARKER SIGNS

LAST REVISION:
07/24/2024



PLATE NO.
GEN-2

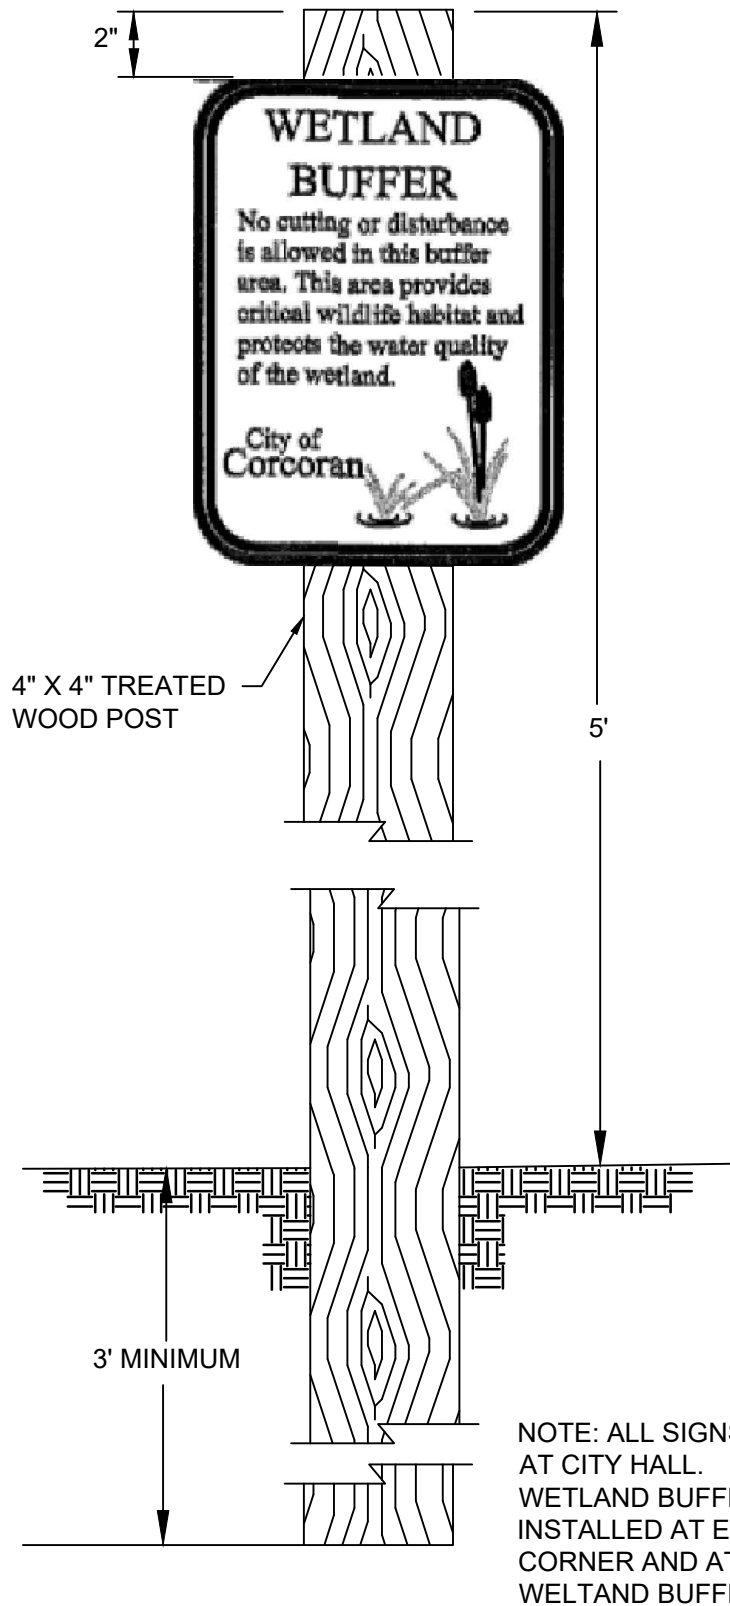

2025 Standard Detail Plates

WETLAND BUFFER SIGN

LAST REVISION:
07/24/2024



PLATE NO.
GEN-3

MANDREL SIZE

SDR 35 (DEPTH<16')				
PIPE SIZE (IN)	DEFLECTION TEST		AIR TEST	
	BASE I.D. (IN)	5% DEFLECTION (IN)	PRESSURE* (PSIG)	TIME (MIN)
4	3.874	3.68	4	2
6	5.742	5.45	4	3
8	7.665	7.28	4	4
10	9.563	9.08	4	5
12	11.361	10.79	4	6
15	13.898	13.2	4	7.5

PS 46 (DEPTH<16')				
PIPE SIZE (IN)	DEFLECTION TEST		AIR TEST	
	BASE I.D. (IN)	5% DEFLECTION (IN)	PRESSURE* (PSIG)	TIME (MIN)
18	16.976	16.13	4	9
21	20.004	19	4	10.5
24	22.48	21.36	4	12
27	25.327	24.06	4	13.5

SDR 26 (16'<DEPTH<25')				
PIPE SIZE (IN)	DEFLECTION TEST		AIR TEST	
	BASE I.D. (IN)	5% DEFLECTION (IN)	PRESSURE* (PSIG)	TIME (MIN)
6	5.612	5.33	4	3
8	7.488	7.12	4	4
10	9.342	8.87	4	5
12	11.102	10.54	4	6
15	13.575	12.9	4	7.5

PS 115 (16'<DEPTH<25')				
PIPE SIZE (IN)	DEFLECTION TEST		AIR TEST	
	BASE I.D. (IN)	5% DEFLECTION (IN)	PRESSURE* (PSIG)	TIME (MIN)
18	16.586	15.76	4	9
21	19.545	18.57	4	10.5
24	21.964	20.87	4	12
27	24.744	23.51	4	13.5
30	28.763	27.32	4	15

C-900 DR 18 (25'<DEPTH)				
PIPE SIZE (IN)	DEFLECTION TEST		AIR TEST	
	BASE I.D. (IN)	5% DEFLECTION (IN)	PRESSURE* (PSIG)	TIME (MIN)
6	5.934	5.49	4	3
8	7.754	7.37	4	4
10	9.487	9.01	4	5
12	11.265	10.7	4	6
14	13.05	12.4	4	7
16	14.831	14.09	4	8
18	16.609	15.78	4	9
20	18.386	17.47	4	10
24	21.94	20.84	4	12

FORCEMAIN TESTING NOTES:

- FORCEMAIN HYDROSTATIC TEST PROCEDURE AS FOLLOWS:
 - PUMP SYSTEM TO MINIMUM 75 PSI
 - THE FORCEMAIN SYSTEM WILL BE ACCEPTED AS PASSING IF THE PRESSURE HAS NO DROP IN PRESSURE IN 2 HOURS.
- GAUGE TO BE USED WILL BE ASHCROFT, MODEL 1082, 4 1/2" DIAMETER IN ONE PSI INCREMENTS OR APPROVED EQUAL.
- TRACER WIRE TEST TO BE PERFORMED ON ALL SANITARY SEWER AND SANITARY SEWER SERVICES BY METROTECH OR APPROVED EQUAL.
- ALL FORCEMAIN TESTING IS CONSIDERED INCIDENTAL.

GENERAL TESTING NOTES:

- PIPE MATERIAL AND TESTING REQUIREMENTS MAY CHANGE DEPENDING ON SOIL CONDITIONS AND OTHER FACTORS.
- ALL TESTING TO OCCUR BEFORE BUILDING PERMITS ARE ISSUED OR CONSTRUCTION OF WEAR COURSE PAVEMENT.
- CITY TO BE NOTIFIED MINIMUM 48 HOURS BEFORE ANY UTILITY TESTING.

SANITARY SEWER TESTING NOTES:

- A MINIMUM WAITING PERIOD OF 30 DAYS AFTER INSTALLATION IS REQUIRED BEFORE DEFLECTION TEST MAY BE PERFORMED.
- TRACER WIRE TEST TO BE PERFORMED ON ALL SANITARY SEWER AND SANITARY SEWER SERVICES BY METROTECH OR APPROVED EQUAL.
- AIR TEST WILL BE PERFORMED AT A PRESSURE OF 4.0 PSIG GREATER THAN THE AVERAGE BACKPRESSURE OF ANY GROUND WATER PRESENT.
- AIR TEST WILL BE PERFORMED ONLY AFTER ALL PROXIMAL STORM SEWER HAS BEEN INSTALLED.
- *IF GROUNDWATER IS PRESENT, FOR EVERY FOOT OF GROUND WATER ABOVE THE PIPE SPRING LINE, INCREASE THE GAGE TEST PRESSURE BY 0.43 PSI (TO COMPENSATE FOR WATER BACK PRESSURE).
- THE SEWER LINE WHICH IS BEING TESTED WILL BE ACCEPTED AS PASSING THE AIR TEST IF THE PRESSURE DOES NOT DROP MORE THAN 0.0 PSI IN LESS TIME THAN 30 SECONDS PER INCH IN DIAMETER OF THE PIPE BEING TESTED.
- TELEVISION SHALL BE PERFORMED ON ALL NEWLY INSTALLED GRAVITY SEWER FOLLOWING ALL OTHER SUCCESSFUL TESTING. TELEVISION VIDEO AND REPORT TO BE SUBMIT TO THE ENGINEER VIA EMAIL AND HARD COPY.
- SANITARY SEWER TO BE JETTED PRIOR TO TELEVISION.
- ALL SANITARY SEWER TESTING TO BE CONSIDERED INCIDENTAL.

WATERMAIN TESTING NOTES:

- WATERMAIN TESTING TO INCLUDE ALL CURB STOPS AND HYDRANT LEADS.
- HYDROSTATIC PRESSURE TEST PROCEDURE AS FOLLOWS:
 - PUMP SYSTEM TO MINIMUM 150 PSI.
 - THE WATERMAIN SYSTEM WILL BE ACCEPTED AS PASSING IF THE PRESSURE HAS NO DROP IN PRESSURE IN 2 HOURS.
 - ALL BUTTERFLY VALVES TO BE INDIVIDUALLY HYDROSTATICALLY TESTED AGAINST BOTH SIDES OF THE VALVE FOR A MINIMUM OF 30 MINUTES WITH NO DROP IN PRESSURE.
 - PRESSURE TEST WILL BE PERFORMED ONLY AFTER ALL PROXIMAL STORM SEWER HAS BEEN INSTALLED.
 - GAUGE TO BE USED WILL BE ASHCROFT, LIQUID FILLED, 4 1/2" DIAMETER IN ONE PSI INCREMENTS OR APPROVED EQUAL.
- BACTERIA TEST (MINIMUM 2 SETS)
 - 1 TEST FOR FOR EVERY 1200 LF.
 - 1ST SET OF TESTS 24 HOURS AFTER INITIAL FLUSHING.
 - 2ND SET OF TESTS TO BE TAKEN AFTER PASSING RESULTS FROM FIRST TEST, MINIMUM 24 HOURS AFTER FIRST TEST.
- TRACER WIRE TEST TO BE PERFORMED BY A METROTECH OR APPROVED EQUAL. TRACER ENTIRE LINE/ALL SERVICES TO CURB STOPS.
- WATERMAIN TESTING TO MEET MINNESOTA DEPARTMENT OF HEALTH STANDARDS.
- ALL WATERMAIN TESTING TO BE CONSIDERED INCIDENTAL.

STORM SEWER TESTING NOTES:

- TELEVISION SHALL BE PERFORMED ON ALL STREET DRAINTILE AFTER PRIVATE UTILITIES HAVE BEEN INSTALLED.
- TELEVISION SHALL BE PERFORMED ON ALL REAR YARD. DRAINTILE AFTER RESTORATION IS COMPLETE.
- TELEVISION DRAINTILE IN THE PRESENCE OF CITY.
- TELEVISION SHALL BE PERFORMED ON ALL NEWLY INSTALLED STORM SEWER PER ENGINEERS REQUEST.
- ALL COMPLETED TELEVISION TAPES TO BE EMAILED TO CITY REPRESENTATIVE.
- ANY TELEVISION REQUIRED SHALL BE INCIDENTAL.




2025 Standard Detail Plates

PIPE MATERIAL AND TESTING REQUIREMENTS

LAST REVISION:
01/02/2025



PLATE NO.
GEN-4

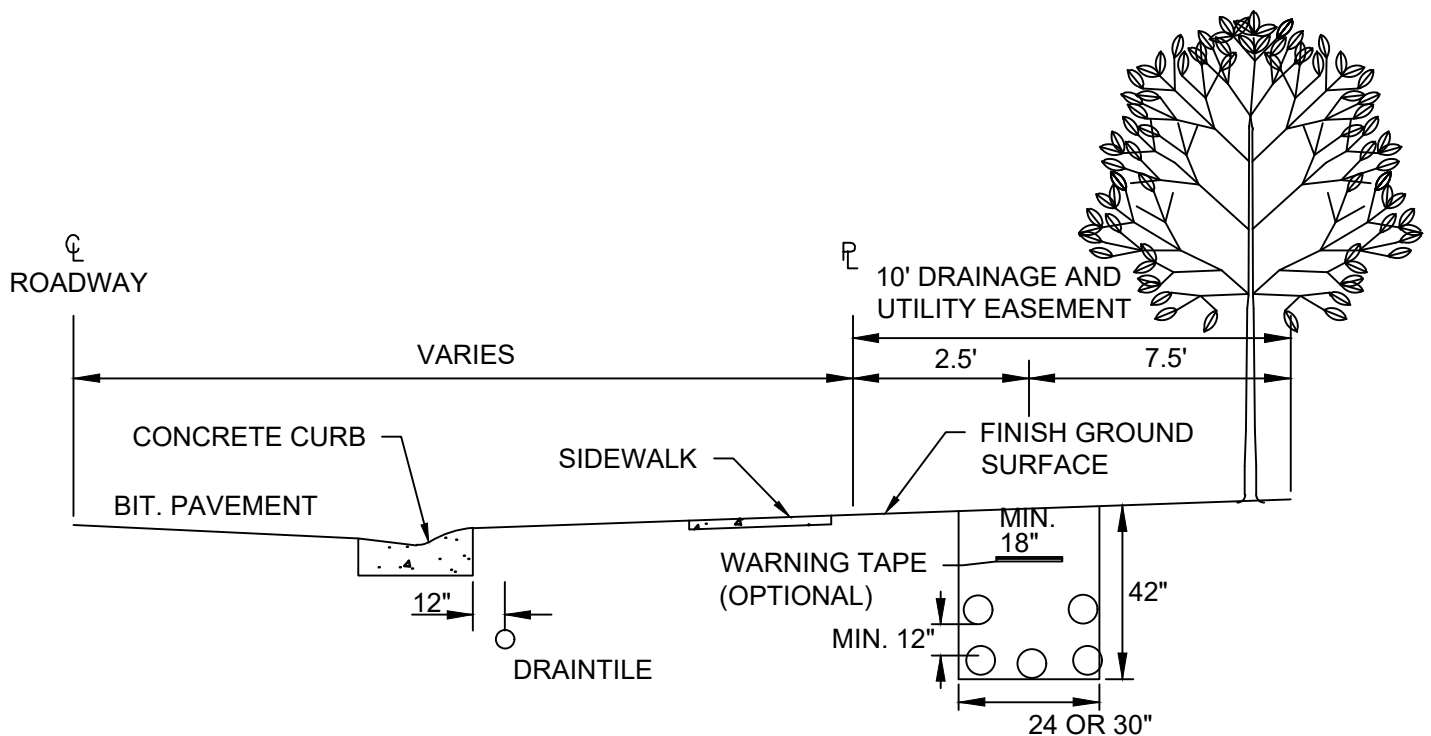

CROSS SECTION
NOT TO SCALE

UTILITIES INCLUDED IN JOINT TRENCH:

- STREET LIGHTING
- ELECTRIC
- CABLE TV
- TELEPHONE
- GAS

NOTE:

1. ALL CONDUIT CROSSINGS UNDER ROADWAYS SHALL BE THE CONTRACTORS RESPONSIBILITY TO INSTALL THE CORRECT SIZE AND NUMBER FOR ALL UTILITIES. THE CONTRACTOR SHALL ALSO INSTALL ONE ADDITIONAL CONDUIT CROSSING FOR FUTURE USE.
2. THE CITY REQUIRES JOINT TRENCHING FOR INSTALLATION OF UTILITIES WITHIN CITY UTILITY EASEMENTS. ALL TRENCHES SHALL BE COMPACTED.
3. ALL CURB STOPS AND BOXES WILL BE LOCATED 9' FROM THE PROPERTY LINE WITHIN THE DRAINAGE AND UTILITY EASEMENT.
4. STREET LIGHTS SHALL BE PLACED AS CLOSE TO 300' INTERVALS AS POSSIBLE IN RESIDENTIAL AREAS AND LOCATED ON PROPERTY CORNERS. ALL STREET LIGHT ELECTRICAL LINES SHALL BE RUGGEDIZED TYPE WIRING OR ENCASED IN CONDUIT AND PLACED WITHIN THE JOINT TRENCH.
5. ALL UTILITY BOXES SHALL BE PLACED ON COMMON PROPERTY CORNERS ON BACK SIDE OF DRAINAGE AND UTILITY EASEMENT.



2025 Standard Detail Plates

UTILITY LAYOUT

LAST REVISION:
07/24/2024



PLATE NO.
GEN-5

RESIDENTIAL BUILDING PERMIT GRADING REQUIREMENTS

LAND SURVEYS/CERTIFICATES OF SURVEY MUST BE PREPARED BY A MINNESOTA LICENSED LAND SURVEYOR. IT IS RECOMMENDED THAT LAND SURVEYS MEET THE STANDARDS OF THE AMERICAN LAND TITLE ASSOCIATION (ALTA) AND AMERICAN CONGRESS OF SURVEYING AND MAPPING (ASCM). COMPLETE AND ACCURATE INFORMATION WILL EXPEDITE THE PLAN REVIEW PROCESS.

PROPOSED SURVEYS MUST SHOW

CERTIFICATION

- *LAND SURVEYOR CERTIFICATION
- *LEGAL DESCRIPTION
- *PERMANENT SURVEY MONUMENT AND DESCRIPTION
- *SCALE AND NORTH ARROW
- *PREPARATION DATE AND REVISION DATES

FEATURES

- *FOUNDATION TYPE (FULL BASEMENT, WALKOUT, LOOKOUT, ETC.)
- *LOT DIMENSIONS
- *BUILDING SETBACKS
- *PROPERTY AND EASEMENT LINES INCLUDING LANDSCAPING, TRAIL, 100-YEAR HWL, ADN DRAINAGE AND UTILITY EASEMENTS. DRAINAGE AND UTILITY EASEMENTS ARE TO ENCOMPASS ALL DRAINAGE.
- *ADJACENT SIDEWALKS, CURBS, AND STREETS
- *DELINEATED WETLAND EDGE
- *EDGE OF WETLAND BUFFER WITH BUFFER SIGN LOCATIONS
- *DRIVEWAYS AND PATHWAYS
- *TREE LINES/EDGE OF CANOPY
- *WELL, SEPTIC SYSTEMS, TANKS
- *LOCATIONS AND DIMENSIONS OF EXISTING AND PROPOSED STRUCTURES
- *WETLANDS, PONDS, LAKES, STREAMS, DRAINAGE SWALES, ETC.
- *SETBACKS TO OHW/NHW CONTOUR, WETLANDS, PONDS, LAKES, RIVERS
- *WATERMAINS, SANITARY AND STORM SEWER, DRAINTILE AND DRAINTILE CLEANOUTS, CATCHBASINS, AND MANHOLES
- *DRAINAGE OUTLETS, OUTLET CONTROL STRUCTURES, EMERGENCY OVERFLOWS, AND LABELLED POND ACCESS ROUTES.
- *VISIBLE AND UNDERGROUND COMPONENTS OF PUBLIC AND PRIVATE UTILITIES INCLUDING WATER AND SEWER STUBS AND SIZES
- *LANDSCAPING AS SHOWN ON THE APPROVED LANDSCAPE PLAN
- *RETAINING WALLS, FENCES, AND UTILITY PEDESTALS.

ELEVATIONS

- *LOT CORNER ELEVATIONS, EXISTING LOT ELEVATIONS, AND PROPOSED ELEVATIONS AND CONTOURS PER APPROVED GRADING PLAN
- *SPOT ELEVATIONS AT THE MINIMUM REQUIREMENTS OF 25' OR AT GRADE BREAKS TO DEMONSTRATE MINIMUM 2% AND MAXIMUM 25% (4:1) SLOPES IN MAINTAINED AREAS. A MAXIMUM GRADE OF 33% (3:1) IN NON-MAINTAINED AREAS SUCH AS BUFFERS IS ALLOWED AND OTHERWISE ONLY WHEN APPROVED BY THE CITY ENGINEER.
- *SPOT ELEVATIONS SHOWING THE LOWEST GROUND ELEVATION ADJACENT TO THE BUILDING. THE GROUND ADJACENT TO THE FOUNDATION SHALL BE SLOPED AWAY AT A MINIMUM OF 0.5' OR 5% FOR THE FIRST 10'.
- *SPOT ELEVATIONS AT LOT CORNERS, HIGH POINT DRAINAGE BREAKS, WHERE DRAINAGE SWALES INTERSECT LOT LINES, AND WHERE PONDING EASEMENTS INTERSECT LOT LINES.
- *CENTER OF CITY STREET AND TOP OF CURB ELEVATIONS
- *PROPOSED DRIVE/ROAD GRADE IN % SLOPE (MINIMUM 2%, NOT TO EXCEED 10%)
- *LOWEST FLOOR, LOWEST OPENING, TOP OF FOUNDATION, AND GARAGE FLOOR ELEVATIONS
- *0.5' DROP (5%) OVER THE FIRST 10' AROUND THE BUILDING
- *DRAINAGE DIRECTION ARROWS ON ALL SIDES AND PROPOSED DRAINAGE PATHS
- *DRAINAGE OUTLETS, OUTLET CONTROL STRUCTURES, AND EMERGENCY OVERFLOWS
- *TOTAL AREA OF EXISTING AND PROPOSED IMPERVIOUS SURFACE
- *WATER BODY IDS AND ELEVATIONS SHOWING NORMAL AND HIGH WATER LEVEL AS WELL AS FLOODWAY, FLOODPLAIN, AND ORDINARY HIGH WATER LEVEL ELEVATIONS
- *TOP AND BOTTOM RETAINING WALL ELEVATIONS

ELEVATIONS MUST BE SHOWN AS SEA LEVEL MEASUREMENTS. FOR AS-BUILT CONSTRUCTION AND GRADING SURVEYS, ELEVATIONS MUST BE CROSS-REFERENCED WITH APPROVED ELEVATIONS.

MINIMUM REQUIRED BUILDING ELEVATIONS

BUILDING OPENINGS AND FLOOR ELEVATIONS

ALL OPENINGS AND FLOOR ELEVATIONS MUST BE CONSTRUCTED AT LEAST TWO (2) FEET ABOVE 100-YEAR FLOOR ELEVATION AND TWO (2) FEET ABOVE HIGHEST ANTICIPATED WATER LEVEL (HWL) ELEVATION AS ESTABLISHED BY THE APPROVED PLANS AND THE CITY ENGINEER.

BUILDING AND GARAGE OPENINGS

ALL LOW ADJACENT GRADE AND GARAGE FLOOR ELEVATIONS MUST BE AT LEAST ONE (1) FOOT ABOVE ALL EMERGENCY OVERFLOWS.

THIS INFORMATIONAL DOCUMENT MAY NOT COMPREHENSIVELY ADDRESS ALL LAWS RELATED TO THE SUBJECT ADDRESSED. IT IS PROVIDED TO SERVE ONLY AS A HELPFUL GUIDE. SITE PREPARATION OR PERMITTED WORK IS NOT ALLOWED UNTIL PERMITS HAVE BEEN ISSUED BY THE CITY OF CORCORAN..



2025 Standard Detail Plates

BUILDING PERMIT & CERTIFICATE OF SURVEY SUBMISSION REQUIREMENTS


LAST REVISION:
01/07/2025



PLATE NO.
GEN-6

GROUT BOTTOM OF MANHOLE TO 1/2 DIAMETER AT PIPE
AND SLOPE GROUT 2" TOWARD INVERT.

CASTING	A	B
R1642	27"	7"
R1755G (WT REQ.)	27"	7"
Ess.Bro.309	27"	7"

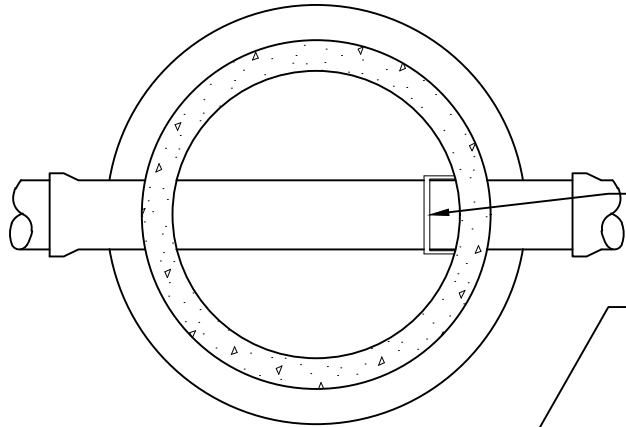

PLAN

MANHOLE STEPS SHALL BE PLACED SO THAT
OFFSET VERTICAL PORTION OF CONE IS FACING
DOWNSTREAM

NEENAH FRAME AND COVER PER TABLE OR
EQUAL, LETTERED "SANITARY SEWER" WITH 2
CONCEALED PICK HOLES AND SELF SEALING LID.
SEE SPECIFICATION FOR CASTING NUMBERS

MINIMUM 0.4' OF RINGS, MAXIMUM 1' OF RINGS.
TOP 2 RINGS MUST BE 2" RINGS.
FULL BED OF MORTAR BETWEEN EACH RING.
1 RING WITH MORTAR= 0.2'
INSTALL INTERIOR I&I BARRIER EULL'S OR
APPROVED EQUAL

MORTAR SHALL BE AIR ENTRAINED
UNDERGROUND UTILITY MORTAR WHICH MEETS
OR EXCEEDS ASTM C270 AND ASTM 387.

ONLY PLASTIC SHIMS SHALL BE
ALLOWED IF NEEDED.

MANHOLE STEPS, COPOLYMER POLYPROPYLENE
PLASTIC, WITH $\frac{1}{2}$ " GRADE 60 STEEL REINFORCEMENT
OR EQUAL, 16" O.C.

ALL JOINTS IN MANHOLE TO HAVE "O" RING
RUBBER GASKETS


GATOR WRAP REQUIRED ON BOTTOM JOINT.
ALL OTHER JOINTS TO BE WRAPPED AS
DIRECTED BY ENGINEER

PIPE SHALL NOT BE CUT 2" FROM INSIDE FACE
OF WALL

NOTE: KOR-N-SEAL MANHOLE OR APPROVED
EQUAL CONSIDERED ACCEPTABLE ALTERNATE.
ALL DOG HOUSES SHALL BE GROUTED ON INSIDE.
AN A-LOCK GASKET SHALL BE USED AND NO
EXTERNAL DOGHOUSE IS REQUIRED

COMPACT TO TOP OF PIPE, TO FIRST JOINT

MINIMUM THICKNESS OF PRECAST BASE IS 6"
FOR STRUCTURES 14" DEEP OR LESS, AND
INCREASES 1" IN THICKNESS FOR EVERY 4'
OF DEPTH GREATER THAN 14', AND REINFORCE
WITH 6" X 6" 10/10 MESH

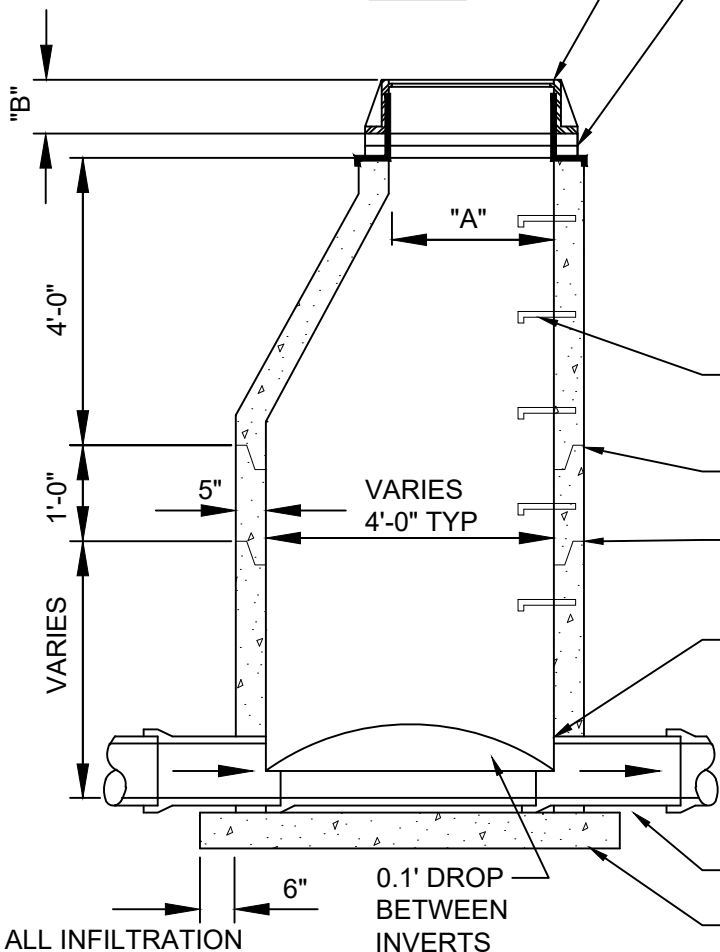

SECTION

ALL INFILTRATION
AREAS SHALL BE
REPAIRED UNTIL
MANHOLE IS WATER
TIGHT.




2025 Standard Detail Plates

SANITARY SEWER MANHOLE

LAST REVISION:
01/02/2025



PLATE NO.
SAN-1

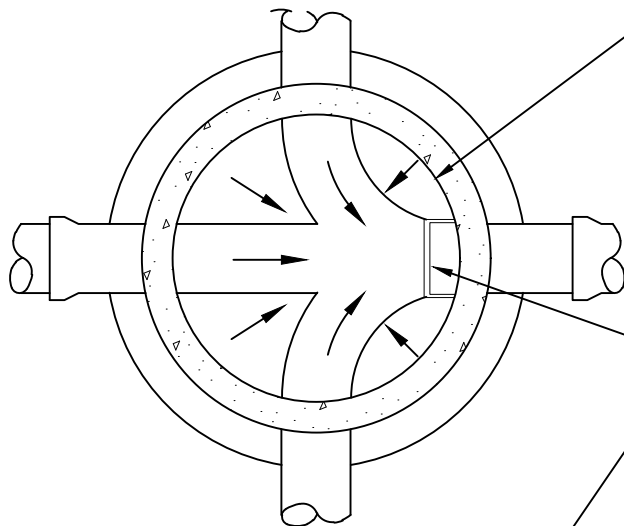

PLAN

CASTING	A	B
R1642	27"	7"
R1755G (WT REQ.)	27"	7"
Ess. Bro. 309	27"	7"

MANHOLE STEPS SHALL BE PLACED SO THAT OFFSET VERTICAL PORTION OF CONE IS FACING DOWNSTREAM.

NEENAH FRAME AND COVER OR EQUAL LETTERED "SANITARY SEWER" WITH 2 CONCEALED PICK HOLES AND SELF SEALING LID.

MINIMUM 0.4' OF RINGS, MAXIMUM 1' OF RINGS. TOP 2 RINGS MUST BE 2" RINGS. FULL BED OF MORTAR BETWEEN EACH RING. 1 RING WITH MORTAR= 0.2' INSTALL INTERIOR I&I BARRIER EULL'S OR APPROVED EQUAL

MORTAR SHALL BE AIR ENTRAINED UNDERGROUND UTILITY MORTAR WHICH MEETS OR EXCEEDS ASTM C270 AND ASTM 387.

ONLY PLASTIC SHIMS SHALL BE ALLOWED IF NEEDED.

MANHOLE STEPS, COPOLYMER POLYPROPYLENE PLASTIC, WITH 1/2" GRADE 60 STEEL REINFORCEMENT OR EQUAL, 16" ON CENTER.


ALL JOINTS IN MANHOLE TO HAVE "O" RING RUBBER GASKETS.

GATOR WRAP REQUIRED ON BOTTOM JOINT. ALL OTHER JOINTS TO BE WRAPPED AS DIRECTED BY ENGINEER

PIPE SHALL BE CUT 2" FROM INSIDE FACE OF WALL.

NOTE: KOR-N-SEAL MANHOLE OR APPROVED EQUAL CONSIDERED ACCEPTABLE ALTERNATE. ALL DOG HOUSES SHALL BE GROUTED ON INSIDE. AN A-LOCK GASKET SHALL BE USED AND NO EXTERNAL DOGHOUSE IS REQUIRED

MINIMUM THICKNESS OF PRECAST BASE IS 6" FOR STRUCTURES 14' DEEP OR LESS, AND INCREASES 1" IN THICKNESS FOR EVERY 4' OF DEPTH GREATER THAN 14', AND REINFORCE WITH 6"X6" 10/10 MESH.

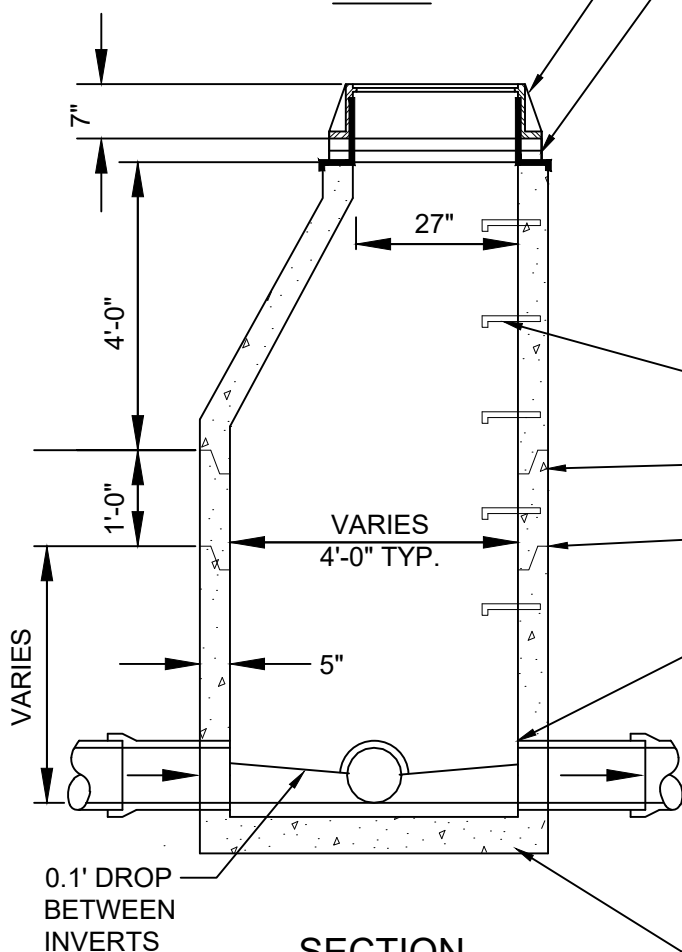

SECTION

ALL INFILTRATION AREAS SHALL BE REPAIRED UNTIL MANHOLE IS WATER TIGHT.




2025 Standard Detail Plates

SANITARY SEWER JUNCTION MANHOLE

LAST REVISION:
01/02/2025



PLATE NO.
SAN-2

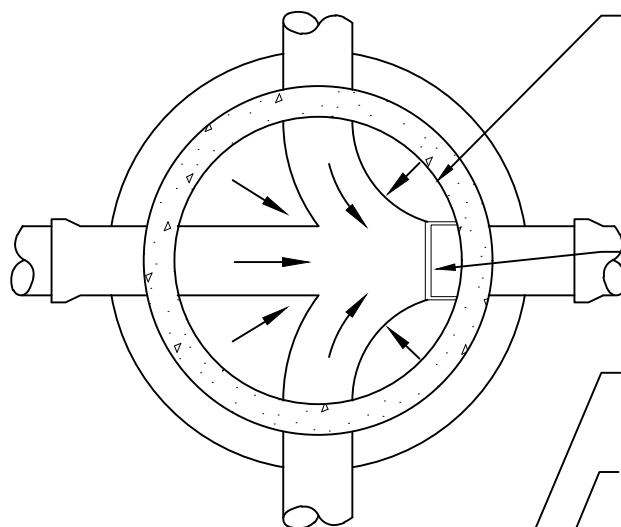

PLAN

GROUT BOTTOM OF MANHOLE TO 1/2 DIAMETER AT PIPE AND SLOPE GROUT 2" TOWARD INVERT.

CASTING	A	B
R1642	27"	7"
R1755G	27"	7"
Ess.Bro.309	27"	7"

MANHOLE STEPS SHALL BE PLACED SO THAT OFFSET VERTICAL PORTION OF CONE IS FACING DOWNSTREAM.

NEENAH FRAME AND COVER PER TABLE OR EQUAL, LETTERED "SANITARY SEWER", WITH 2 CONCEALED PICK HOLES AND SELF SEALING LID.

MINIMUM 0.4' OF RINGS, MAXIMUM 1' OF RINGS. TOP 2 RINGS MUST BE 2" RINGS. FULL BED OF MORTAR BETWEEN EACH RING. 1 RING WITH MORTAR = 0.2' INSTALL INTERIOR I&I BARRIER EULL'S OR APPROVED EQUAL

MORTAR SHALL BE AIR ENTRAINED UNDERGROUND UTILITY MORTAR WHICH MEETS OR EXCEEDS ASTM C270 AND ASTM 387.

ONLY PLASTIC SHIMS SHALL BE ALLOWED IF NEEDED.


GATOR WRAP REQUIRED ON BOTTOM JOINT. ALL OTHER JOINTS TO BE WRAPPED AS DIRECTED BY ENGINEER

ALL JOINTS IN MANHOLE TO HAVE "O" RING RUBBER GASKETS.

MANHOLE STEPS, COPOLYMER POLYPROPYLENE PLASTIC, WITH 1/2" GRADE 60 STEEL REINFORCEMENT OR EQUAL, 16" ON CENTER.

TOP BAREL TO BE SECURED WITH 2 LAYERS OF RAMNEK OR APPROVED EQUAL.

PIPE SHALL BE CUT 2" FROM INSIDE FACE OF WALL. NOTE: KOR-N-SEAL MANHOLE OR APPROVED EQUAL CONSIDERED ACCEPTABLE ALTERNATE. ALL DOG HOUSES SHALL BE GROUTED ON INSIDE. AN A-LOCK GASKET SHALL BE USED AND NO EXTERNAL DOGHOUSE IS REQUIRED

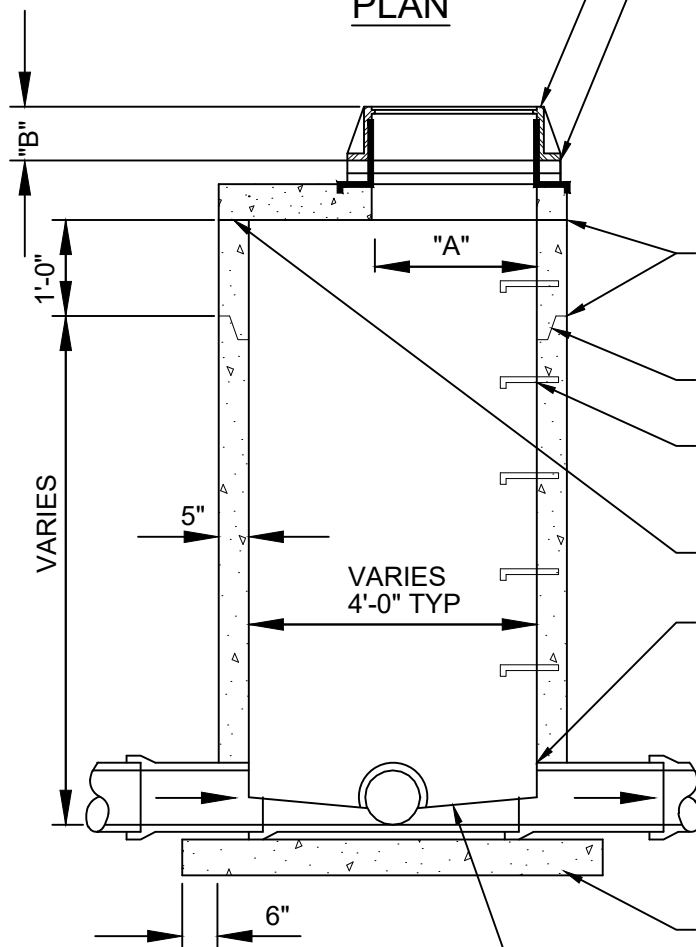

SECTION

0.1' DROP BETWEEN INVERTS

MINIMUM THICKNESS OF PRECAST BASE IS 6" FOR STRUCTURES 14' DEEP OR LESS, AND INCREASES 1" IN THICKNESS FOR EVERY 4' OF DEPTH GREATER THAN 14', AND REINFORCE WITH 6"X6" 10/10 MESH.




2025 Standard Detail Plates

SANITARY SEWER JUNCTION MANHOLE WITH REINFORCED SLAB

LAST REVISION:
01/02/2025




PLATE NO.
SAN-3

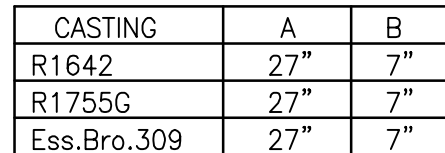


PLAN SECTION
HORSESHOE DETAILS

NOTE: KOR-N-SEAL MANHOLE OR APPROVED EQUAL CONSIDERED ACCEPTABLE ALTERNATE. ALL DOG HOUSES SHALL BE GROUTED ON INSIDE. AN A-LOCK GASKET SHALL BE USED AND NO EXTERNAL DOGHOUSE IS REQUIRED

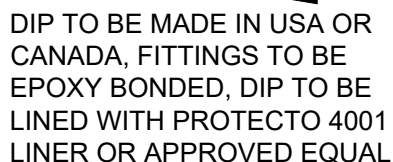


SECTION




DROP INLET MANHOLE


PLATE NO.
SAN-4

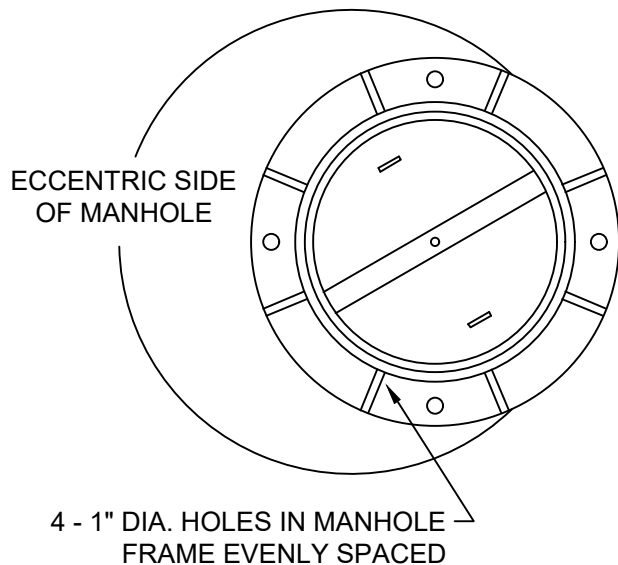

PLAN VIEW TOP
COVER REMOVED

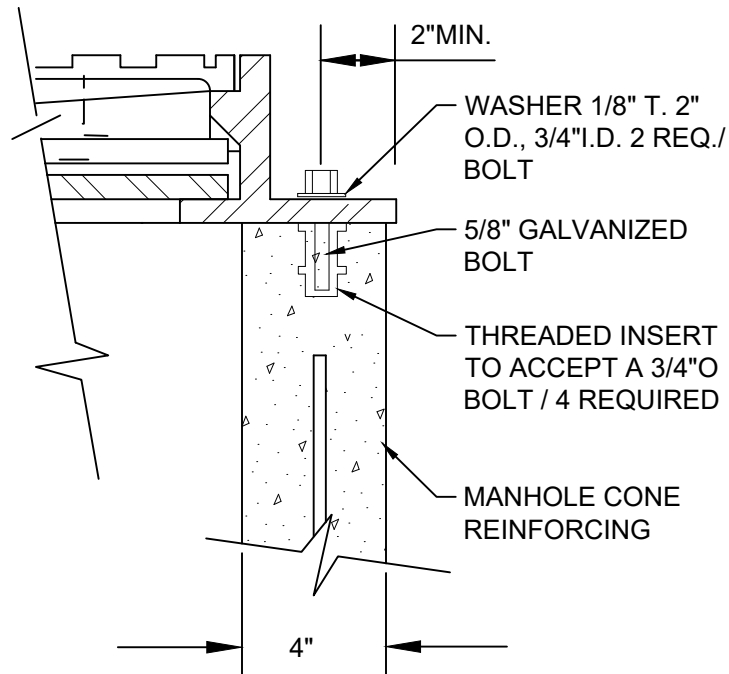

TIE DOWN
DETAIL

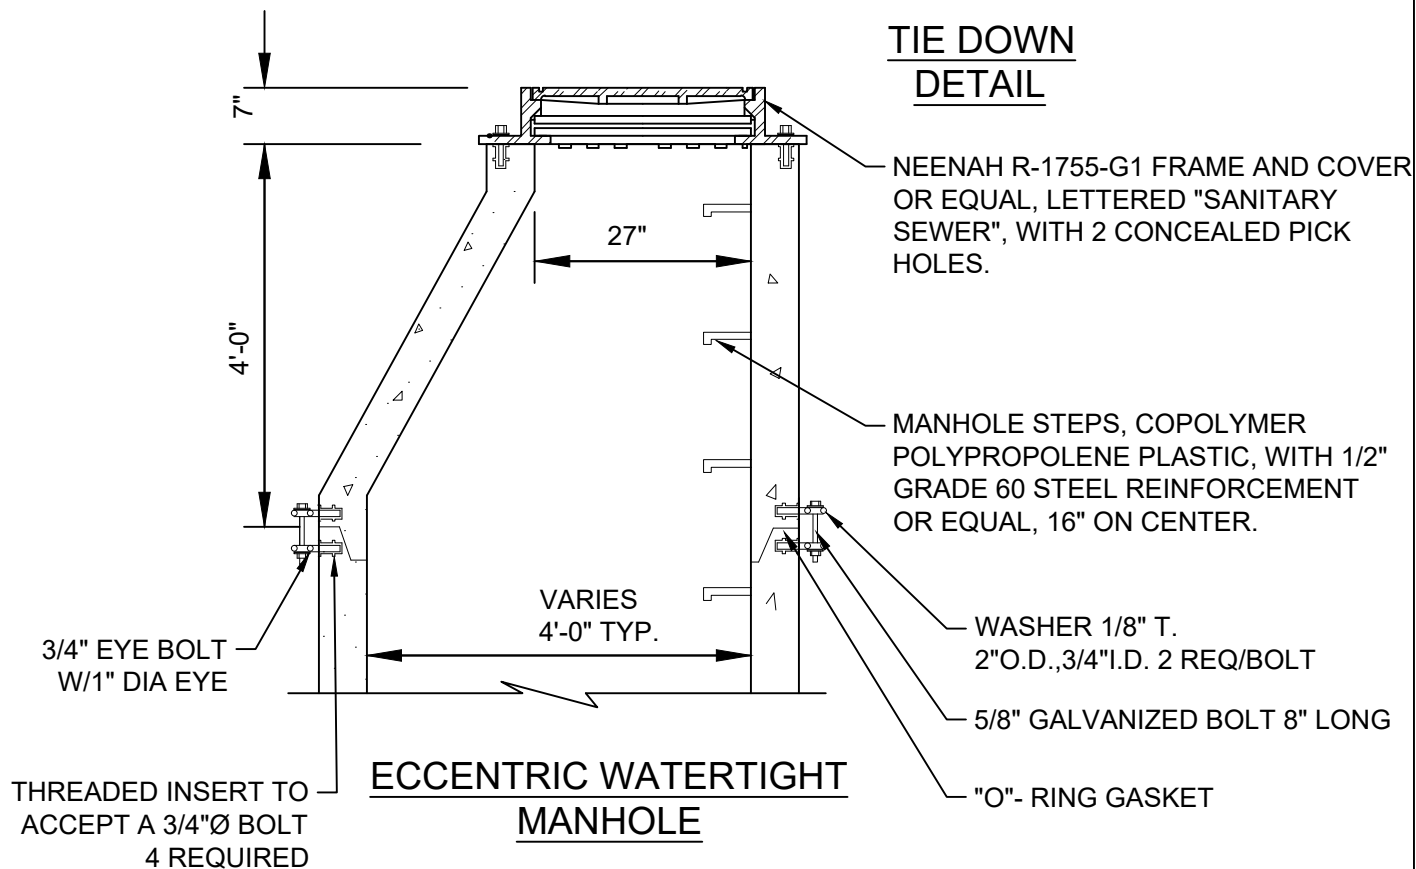


2025 Standard Detail Plates

WATER TIGHT CASTING FOR SANITARY SEWER MANHOLE

LAST REVISION:
07/24/2024



PLATE NO.
SAN-5

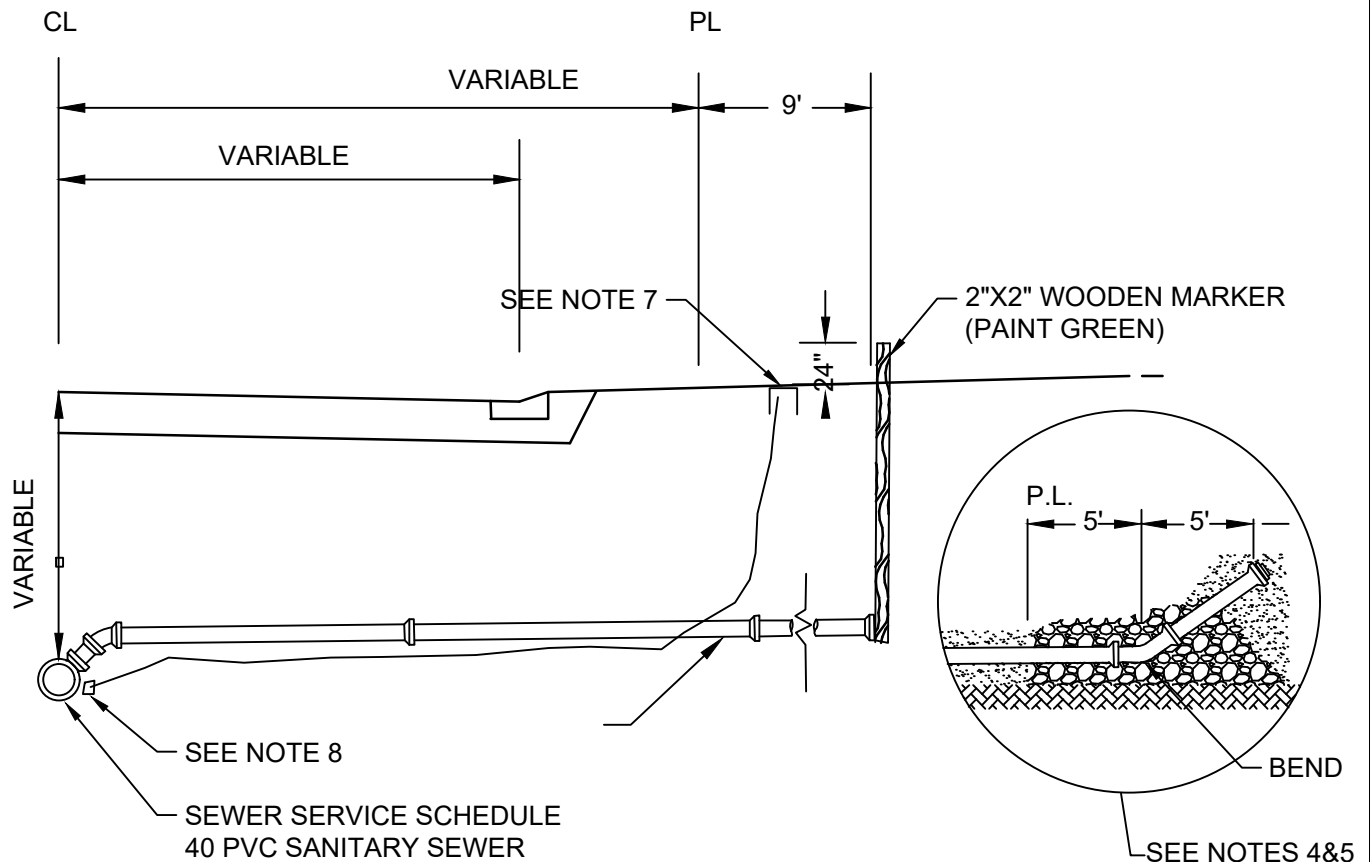

NOTES:

1. SEWER SERVICES. 4" (UNLESS OTHERWISE SPECIFIED ON PLANS) SCHEDULE 40 PVC SEWER PIPE
2. PIPE JOINTS SHALL BE NON GASKETED, SOLVENT WELD TYPE.
3. SLOPE $\frac{1}{4}$ " PER FOOT MINIMUM.
4. ALL PIPE SHALL BE BEDDED IN GRANULAR BORROW 3149.2B1 EXCEPT THE LAST TEN FEET WHERE COARSE FILTER AGGREGATE (3149.2H) WILL BE REQUIRED.
5. 45 DEGREE BENDS SHALL BE USED AT THE END OF THE SERVICE IF DEPTH EXCEEDS 8' TO BRING SANITARY SERVICE INVERT TO CURBSTOP ELEVATION.
6. INSTALL SANITARY RISER TO MATCH CURB STOP ELEVATION.
7. TRACER WIRE SHALL BE BROUGHT UP ALONG WATERMAIN CURB STOP. INSTALL VALVCO, SNAKEPIT, OR APPROVE EQUAL TRAFFIC RATED TRACER WIRE ACCESS BOX WITH 2 LUGS.
8. MIN OF 1 LB. DRIVE IN ANODES WITH MIN 20' WIRE LEAD ARE TO BE INSTALLED AT EVERY SANITARY SERVICE WYE.
9. TRACER WIRE SHALL BE 12 AWG COPPER CLAD STEEL OR WIRE WITH MIN BREAK LOAD OF 450 LB FOR OPEN CUT INSTALLATION RATED FOR 30 VOLTS. MIN 45 MIL HMWPE JACKET
10. TRACER WIRE CONNECTOR SHALL BE DRY CONN DIRECT BURY LUG AQUA, PRO-TRACE DB OR APPROVED EQUAL.



2025 Standard Detail Plates


SANITARY SEWER SERVICE CONNECTION

LAST REVISION:
01/02/2025



PLATE NO.
SAN-6

PVC PIPE BED AND ENCASE IN SELECT GRANULAR, TYPICAL PVC APPLICATION.

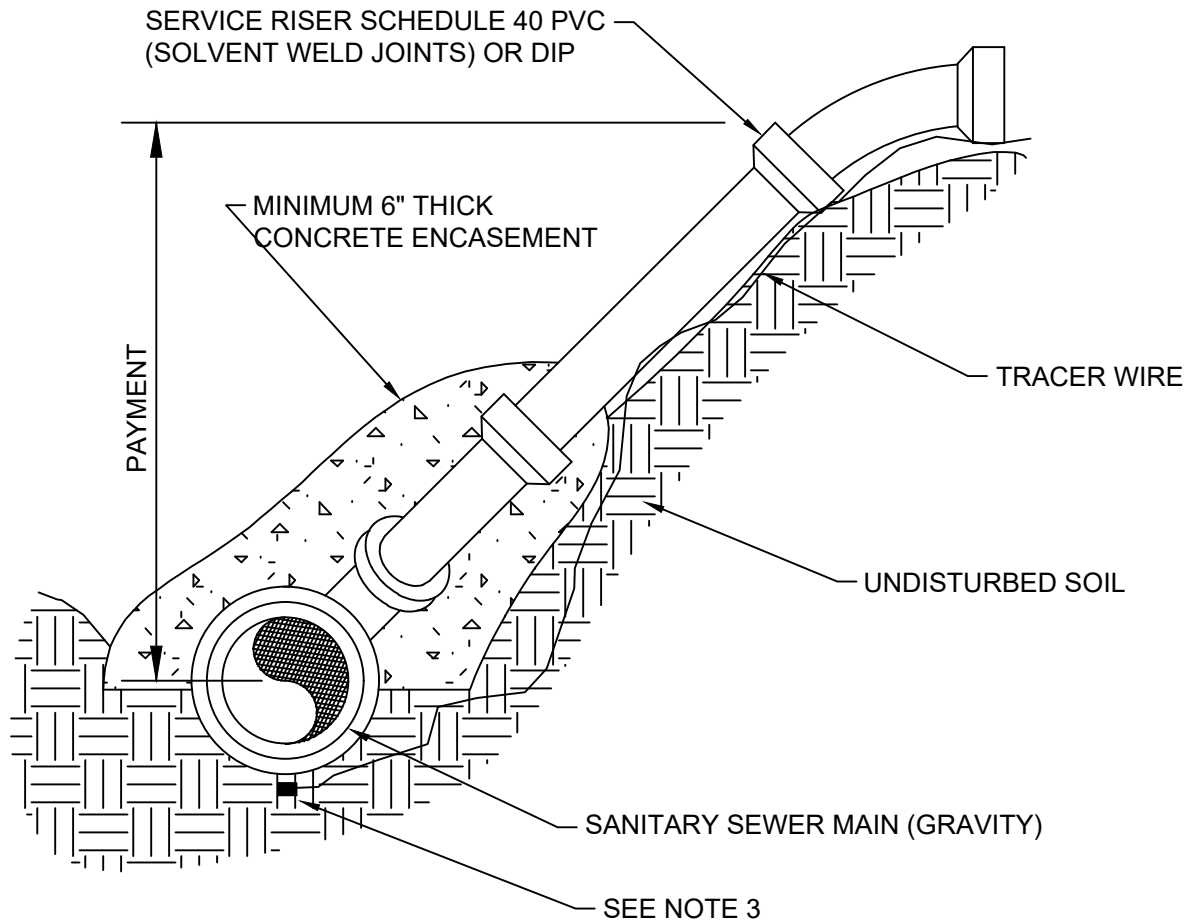

NOTE:

1. TRACER WIRE CONNECTOR SHALL BE DRY CONN DIRECT BURY LUG AQUA, PRO-TRACE DB OR APPROVED EQUAL
2. TRACER WIRE SHALL BE 12 AWG COPPER CLAD STEEL OR WIRE WITH MIN BREAK LOAD OF 450 LB FOR OPEN CUT INSTALLATION RATED FOR 30 VOLTS. MIN 45 MIL HMWPE JACKET
3. MIN OF 1 LB. DRIVE IN ANODES WITH MIN 20' WIRE LEAD ARE TO BE INSTALLED AT EVERY SANITARY SERVICE WYE.
4. SEWER DEPTHS OVER 25' AND ALL TRUNK SEWER LINES SHALL USE DUCTILE IRON TEES AND RISERS IN PLACE OF PVC WYES UNLESS OTHERWISE APPROVED BY ENGINEER.
5. WHERE DUCTILE IRON TEE IS USED IN PLACE OF PVC WYE, RISERS TO BE DIP, DIP TO PVC TRANSITION FITTING TO BE USED AT TOP OF RISER.
6. ALL DUCTILE IRON FITTINGS TO BE EPOXY BONDED. ALL SEWER DUCTILE IRON PIPES AND FITTINGS TO HAVE PROTECTO 401 LINER. ALL MATERIALS TO BE AMERICAN MADE.
7. ALL DUCTILE IRON PIPES AND FITTINGS TO BE WRAPPED IN POLY AND TAPED.



2025 Standard Detail Plates

SANITARY SEWER SERVICE RISER



LAST REVISION:
07/24/2024



PLATE NO.
SAN-7

NOTE:
CLEANOUT CAP SHALL BE
THREADED MALLEABLE IRON
(GALVANIZED)

NOTE:
ENCLOSE LONG SWEEP BEND
OR COMBINATION WYE IN
CONCRETE AS SHOWN.

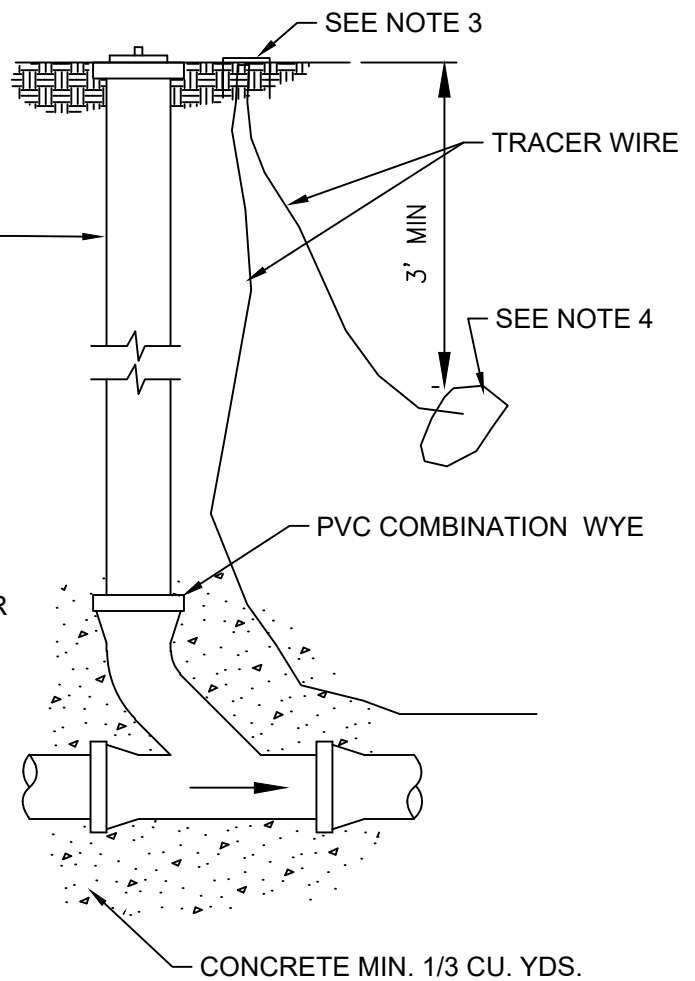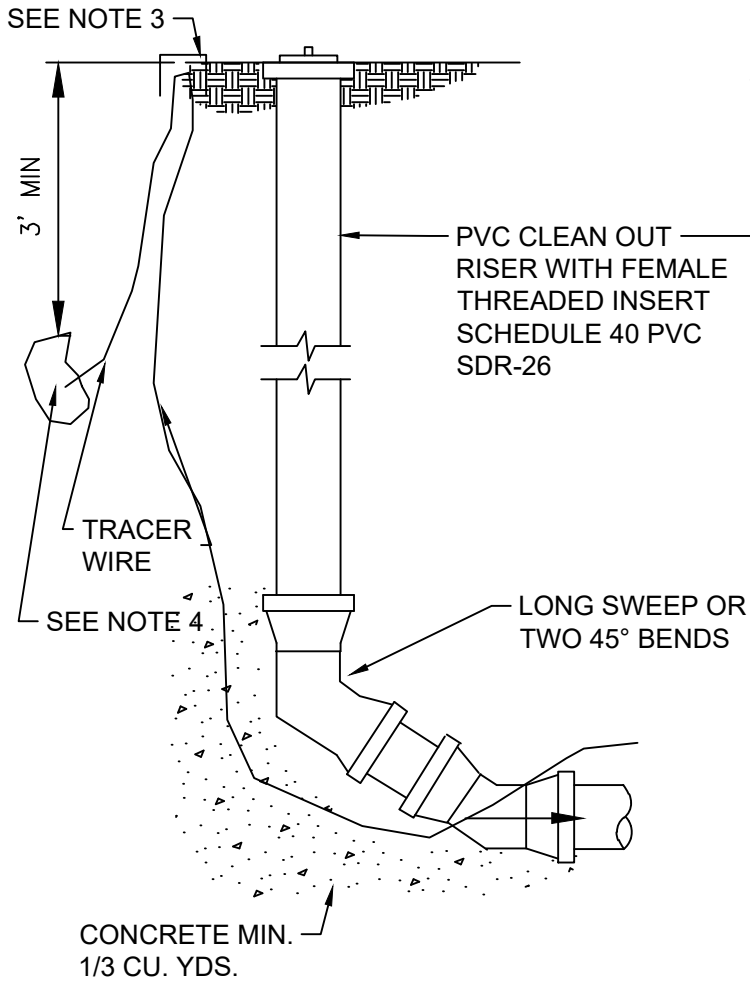

NOTE: END OF LINE CLEANOUT
CLEANOUT IS REQUIRED FOR EVERY 100 FEET OF
SERVICE LENGTH, OR AT BENDS IN SERVICE.

NOTE:

1. IF CLEANOUT IS IN DRIVEWAY, CONTRACTOR MUST INSTALL FORD A-1 CASTING, MARKED WITH "SEWER ON LID.
2. IF CLEANOUT IS IN ROADWAY, CONTRACTOR MUST INSTALL TOP SECTION OF A VALVE BOX WITH LID MARKED "SEWER".
3. TRACER WIRE SHALL BE BROUGHT UP ALONG CLEANOUT. INSTALL VALVCO, SNAKEPIT, OR APPROVE EQUAL TRAFFIC RATED TRACER WIRE ACCESS BOX.
4. MIN OF 1 LB. DRIVE IN ANODES WITH MIN 20' WIRE LEAD ARE TO BE INSTALLED AT EVERY TRACE WIRE ACCESS BOX.
5. TRACER WIRE SHALL BE 12 AWG COPPER CLAD STEEL OR WIRE WITH MIN BREAK LOAD OF 450 LB FOR OPEN CUT INSTALLATION RATED FOR 30 VOLTS. MIN 45 MIL HMWPE JACKET

IN LINE CLEANOUT




2025 Standard Detail Plates

SANITARY SEWER PVC SEWER LINE CLEANOUTS

LAST REVISION:
07/24/2024



PLATE NO.
SAN-8

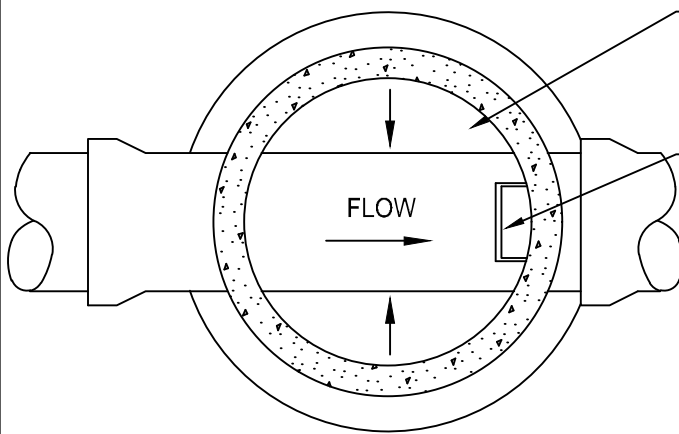


GROUT BOTTOM OF MANHOLE TO A MINIMUM OF 1/2 DIAMETER AT PIPE AND SLOPE GROUT 2" TOWARD INVERT.

MANHOLE STEPS SHALL BE PLACED SO THAT OFFSET VERTICAL PORTION OF CONE IS FACING DOWNSTREAM FOR ALL PIPES UP TO 24". PLACE STEPS ON RIGHT HAND SIDE WHEN FACING DOWN STREAM FOR ALL PIPES 24" AND OVER

APPROVED CASTINGS

CASTING	A	B
NEENAH R1642	27"	7"

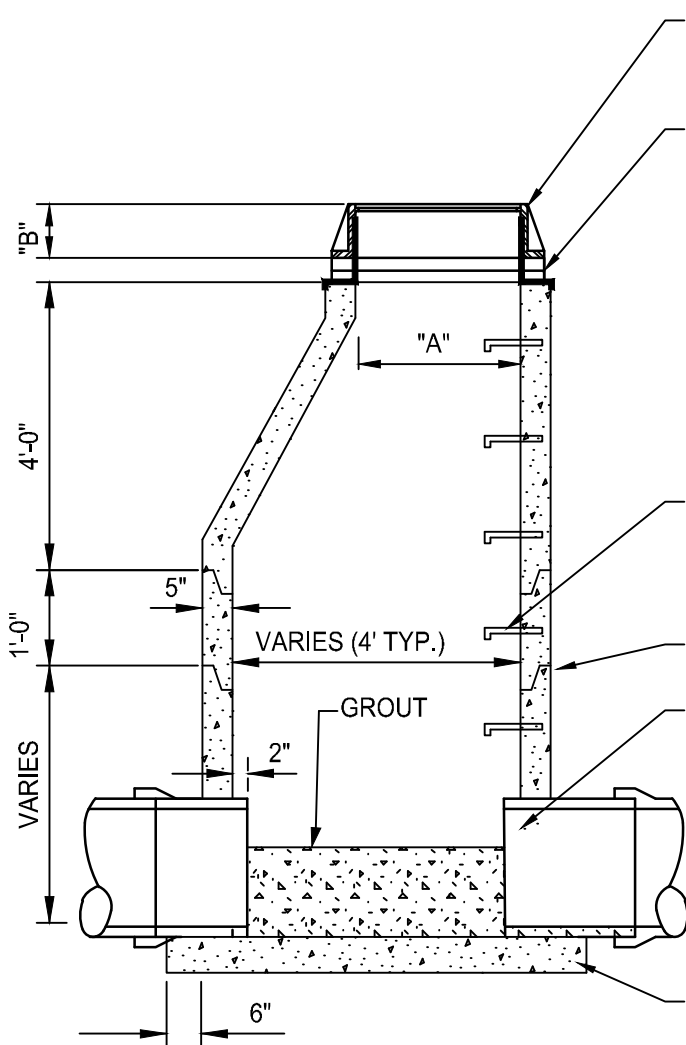

NEENAH FRAME AND COVER OR EQUAL LETTERED, "STORM SEWER", WITH 2 CONCEALED PICK HOLES

MINIMUM 0.4' OF RINGS, MAXIMUM 1' OF RINGS. TOP 2 RINGS MUST BE 2" RINGS. FULL BED OF MORTAR BETWEEN EACH RING. 1 RING WITH MORTAR = 0.2'. INSTALL INTERNAL I&I BARRIER EULL'S FOR IN STREET STRUCTURES. INFISHIELD SHALL BE INSTALLED IN BACKYARD STRUCTURES

ONLY PLASTIC SHIMS SHALL BE ALLOWED IF NEEDED.

MORTAR SHALL BE AIR ENTRAINED UNDERGROUND UTILITY MORTAR WHICH MEETS OR EXCEEDS ASTM C270 AND ASTM C387.

MANHOLE STEPS, COPOLYMER POLYPROPYLENE PLASTIC, WITH 1/2" GRADE 60 STEEL REINFORCEMENT OR EQUAL, 16" ON CENTER. (NO STEPS ALLOWED IN UPPER 27" BARREL.)

ALL JOINTS IN MANHOLE TO HAVE "O" RING RUBBER GASKETS.

PIPE SHALL BE CUT OUT 2" FROM INSIDE FACE OF WALL. **DOG HOUSES MUST BE GROUTED BOTH INSIDE AND OUTSIDE OF STRUCTURE.

SUMP MANHOLE REQUIRED WHEN THERE IS A 1.5' OR GREATER DROP BETWEEN INVERTS, AND THE FIRST STRUCTURE UPSTREAM FROM PIPE OUTLET. SEE STO-4.

MINIMUM SLAB THICKNESS 6" FOR STRUCTURES 14' IN DEPTH OR LESS. INCREASE THICKNESS 1" FOR EACH 4' OF DEPTH GREATER THAN 14', AND REINFORCE WITH 6"X6" 10/10 MESH.




2025 Standard Detail Plates

STORM SEWER MANHOLE

LAST REVISION:
01/02/2025



PLATE NO.
STO-1

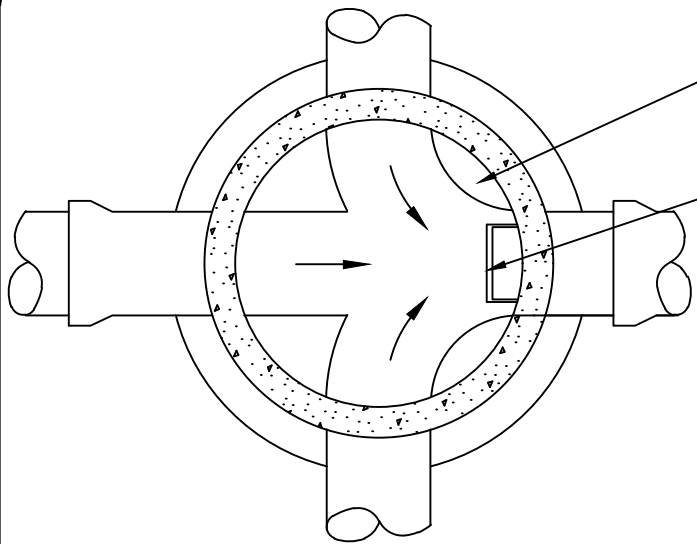


GROUT BOTTOM OF MANHOLE TO A MINIMUM OF 1/2 DIAMETER AT PIPE AND SLOPE GROUT 2" TOWARD INVERT.

MANHOLE STEPS SHALL BE PLACED SO THAT OFFSET VERTICAL PORTION OF CONE IS FACING DOWNSTREAM FOR ALL PIPES UP TO 24". PLACE STEPS ON RIGHT HAND SIDE WHEN FACING DOWN STREAM FOR ALL PIPES 24" AND OVER

APPROVED CASTINGS

CASTING	A	B
NEENAH R1642	27"	7"

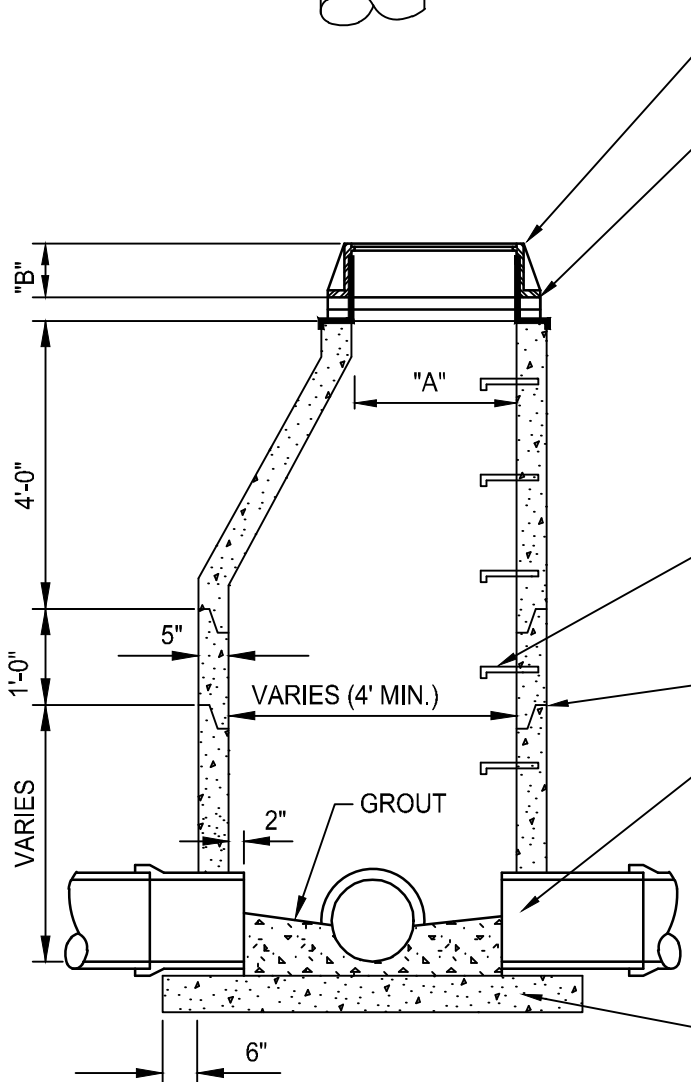

NEENAH FRAME AND COVER OR EQUAL LETTERED, "STORM SEWER", WITH 2 CONCEALED PICK HOLES

MINIMUM 0.4' OF RINGS, MAXIMUM 1' OF RINGS. TOP 2 RINGS MUST BE 2" RINGS.

FULL BED OF MORTAR BETWEEN EACH RING. 1 RING WITH MORTAR = 0.2'. INSTALL INTERNAL I&I BARRIER FULL'S FOR IN STREET STRUCTURES. INFISHIELD SHALL BE INSTALLED IN BACKYARD STRUCTURES

ONLY PLASTIC SHIMS SHALL BE ALLOWED IF NEEDED.

MORTAR SHALL BE AIR ENTRAINED UNDERGROUND UTILITY MORTAR WHICH MEETS OR EXCEEDS ASTM C270 AND ASTM C387.

MANHOLE STEPS, COPOLYMER POLYPROPYLENE PLASTIC, WITH 1/2" GRADE 60 STEEL REINFORCEMENT OR EQUAL, 16" ON CENTER. (NO STEPS ALLOWED IN UPPER 27" BARREL.)

ALL JOINTS IN MANHOLE TO HAVE "O" RING RUBBER GASKETS.

PIPE SHALL BE CUT OUT 2" FROM INSIDE FACE OF WALL.

**DOG HOUSES MUST BE GROUTED BOTH INSIDE AND OUTSIDE OF STRUCTURE.

SUMP MANHOLE REQUIRED WHEN THERE IS A 1.5' OR GREATER DROP BETWEEN INVERTS, AND THE FIRST STRUCTURE UPSTREAM FROM PIPE OUTLET. SEE STO-4.

MINIMUM SLAB THICKNESS 6" FOR STRUCTURES 14' IN DEPTH OR LESS. INCREASE THICKNESS 1" FOR EACH 4' OF DEPTH GREATER THAN 14', AND REINFORCE WITH 6"X6" 10/10 MESH.




2025 Standard Detail Plates

STORM SEWER JUNCTION MANHOLE

LAST REVISION:
01/02/2025




PLATE NO.
STO-2

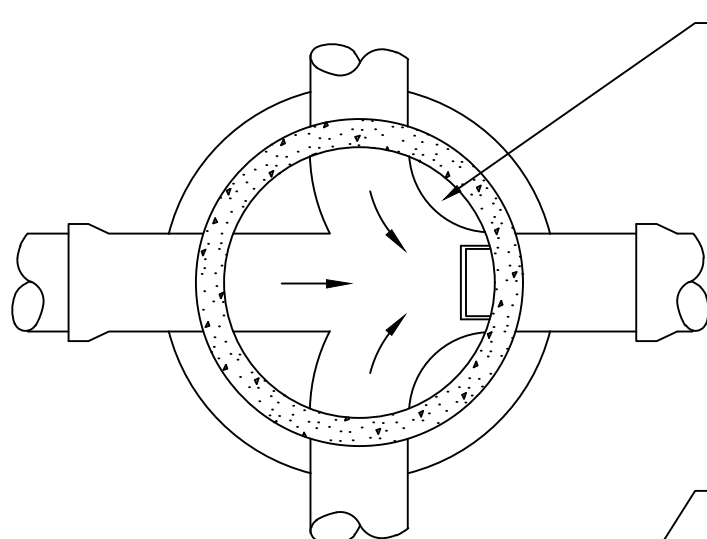

APPROVED CASTINGS		
CASTING	A	B
NEENAH R1642	27"	7"

- NEENAH FRAME AND COVER OR EQUAL
LETTERED, "STORM SEWER", WITH 2
CONCEALED PICK HOLES

MINIMUM 0.4' OF RINGS, MAXIMUM 1' OF RINGS.
TOP 2 RINGS MUST BE 2" RINGS.
FULL BED OF MORTAR BETWEEN EACH RING. 1 RING
WITH MORTAR = 0.2'. INSTALL INTERNAL I&I BARRIER
EULL'S FOR IN STREET STRUCTURES. INFISHIELD
SHALL BE INSTALLED IN BACKYARD STRUCTURES
ONLY PLASTIC SHIMS SHALL BE ALLOWED IF NEEDED.

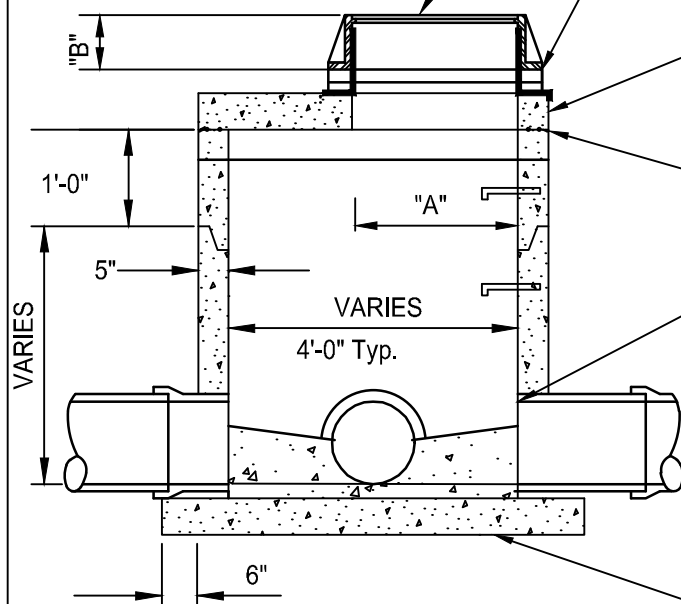

****DOG HOUSES MUST BE GROUTED BOTH INSIDE AND OUTSIDE OF STRUCTURE.**

SUMP MANHOLE REQUIRED WHEN THERE IS A 1.5' OR GREATER DROP BETWEEN INVERTS, AND THE FIRST STRUCTURE UPSTREAM FROM PIPE OUTLET, SEE STO-4.

MINIMUM SLAB THICKNESS 6" FOR STRUCTURES 14' IN DEPTH OR LESS. INCREASE THICKNESS 1" FOR EACH 4' OF DEPTH GREATER THAN 14', AND REINFORCE WITH 6"X6" 10/10 MESH.




STORM SEWER JUNCTION MANHOLE WITH REINFORCED SLAB

LAST REVISION:
01/02/2025



PLATE NO.
STO-3

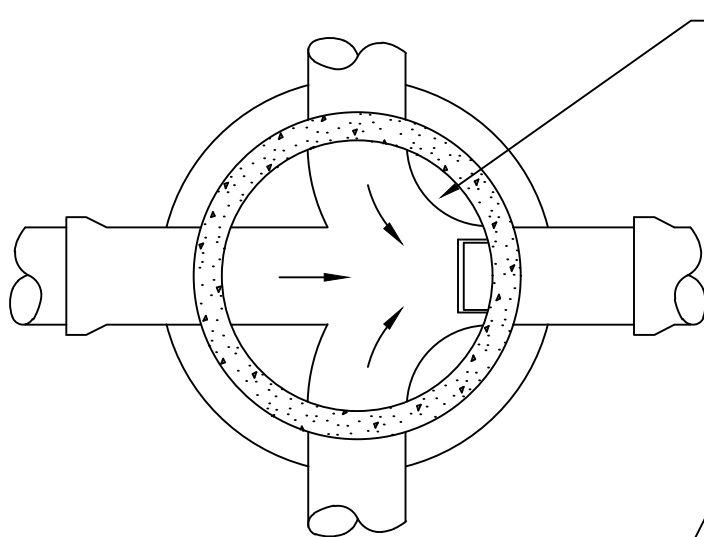

GROUT BOTTOM OF MANHOLE TO A MINIMUM OF 1/2 DIAMETER AT PIPE AND SLOPE GROUT 2" TOWARD INVERT.

APPROVED CASTINGS

CASTING	A	B
NEENAH R1642	27"	7"

ONLY PLASTIC SHIMS SHALL BE ALLOWED IF NEEDED.
MORTAR SHALL BE AIR ENTRAINED UNDERGROUND UTILITY MORTAR WHICH MEETS OR EXCEEDS ASTM C270 AND ASTM C387.

NEENAH FRAME AND COVER OR EQUAL LETTERED, "STORM SEWER", WITH 2 CONCEALED PICK HOLES

MINIMUM 0.4' OF RINGS, MAXIMUM 1' OF RINGS. TOP 2 RINGS MUST BE 2" RINGS. FULL BED OF MORTAR BETWEEN EACH RING. 1 RING WITH MORTAR = 0.2'. INSTALL INTERNAL I&I BARRIER EULL'S FOR IN STREET STRUCTURES. INFISHIELD SHALL BE INSTALLED IN BACKYARD STRUCTURES

ONLY PLASTIC SHIMS SHALL BE ALLOWED IF NEEDED.


6" PRECAST REINFORCED CONCRETE MANHOLE SLAB WITH #4 BARS AT 5" O.C. EACH WAY AND 2-#4 BARS AT ALL SIDES OF OPENING.

TOP BARREL OF SECTION BELOW TOP SLAB TO HAVE FLAT TOP EDGE SEALED WITH 2 BEADS OF RAMNEK OR APPROVED EQUAL.

PIPE SHALL BE CUT OUT 2" FROM INSIDE FACE OF WALL.

SUMP MANHOLE REQUIRED WHEN THERE IS A 1.5' OR GREATER DROP BETWEEN INVERTS, AND THE FIRST STRUCTURE UPSTREAM FROM PIPE OUTLET. SEE STO-4.

MINIMUM SLAB THICKNESS 6" FOR STRUCTURES 14' IN DEPTH OR LESS. INCREASE THICKNESS 1" FOR EACH 4' OF DEPTH GREATER THAN 14', AND REINFORCE WITH 6"X6" 10/10 MESH.

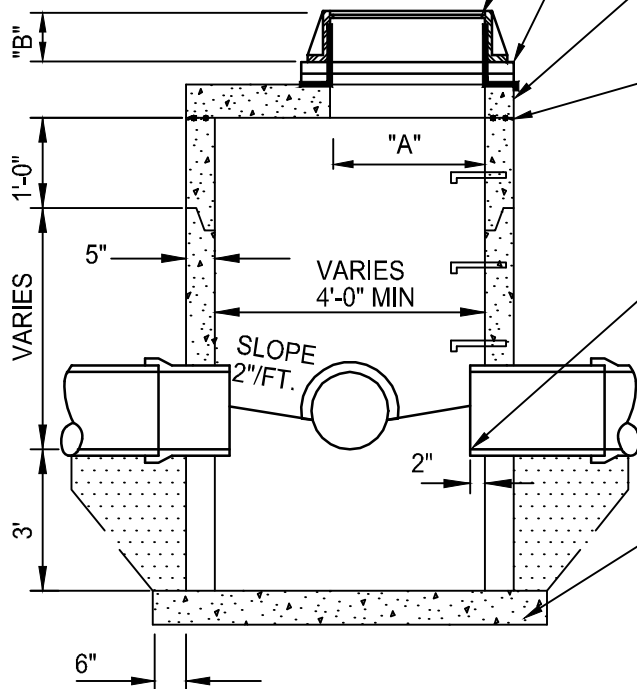

2025 Standard Detail Plates


STORM SEWER JUNCTION MANHOLE WITH REINFORCED SLAB AND SUMP

LAST REVISION:
01/02/2025



PLATE NO.
STO-4

4" PVC DRAINTILE CONNECTION
NO BENDS GREATER THAN 45° SHALL BE ALLOWED

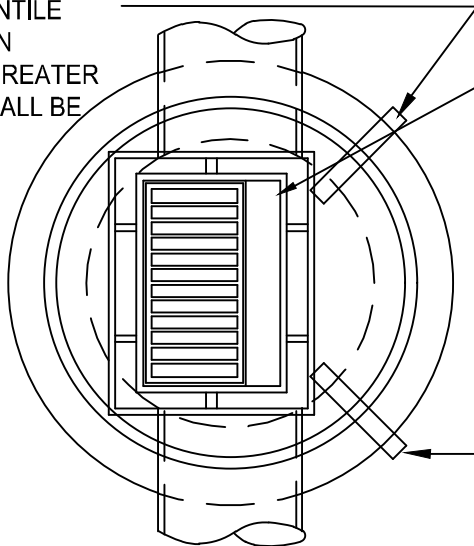


24"X36" SLAB OPENING FOR NEENAH R3067V. INSTALL R3290-A FOR DRIVEWAYS AND VALLEY GUTTERS. (VANE GRATE SHOWN). INSTALL NEENAH 3067VB TWO WAY GRATE AT ALL LOW POINTS.

DIMENSION FROM BACK OF CURB TO CENTER OF PIPE.

4' DIA. MH - 9" IN FROM BACK OF CURB
5' DIA. MH - 3" IN FROM BACK OF CURB
6' DIA. MH - 3" BEHIND BACK OF CURB
7' DIA. MH - 9" BEHIND BACK OF CURB 8' DIA. MH - 15" BEHIND BACK OF CURB

NO BLOCK STRUCTURES ALLOWED.

MINIMUM 0.4' OF RINGS, MAXIMUM 1' OF RINGS. TOP 2 RINGS MUST BE 2" RINGS. FULL BED OF MORTAR BETWEEN EACH RING. 1 RING WITH MORTAR = 0.2'. INSTALL INTERNAL I&I BARRIER EULL'S FOR IN STREET STRUCTURES. INFISHIELD SHALL BE INSTALLED IN BACKYARD STRUCTURES

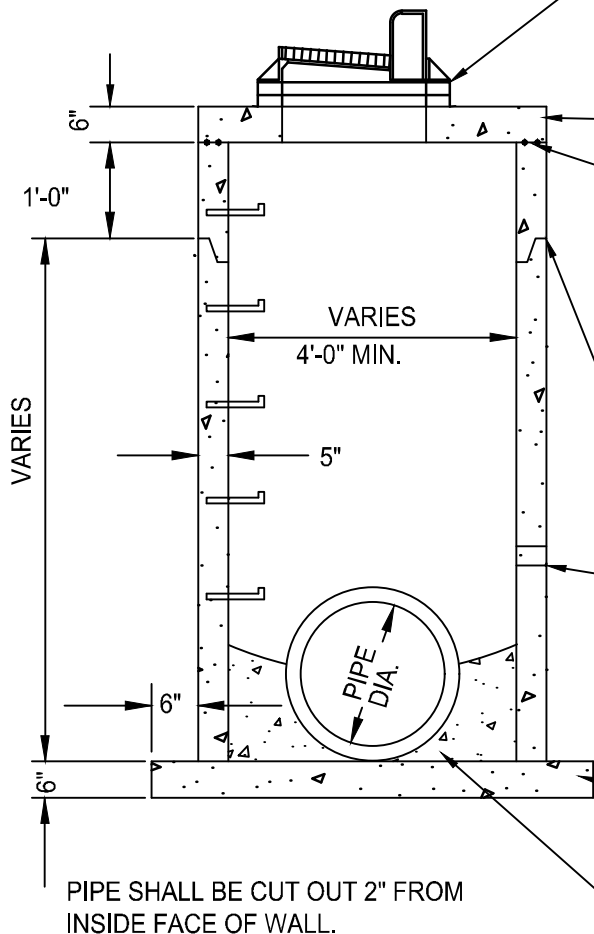

6" PRECAST REINFORCED CONCRETE SLAB.

TOP OF BARREL SECTION UNDER TOP SLAB TO HAVE FLAT TOP EDGE SEALED WITH 2 BEADS OF RAMNEK OR APPROVED EQUAL.

ONLY PLASTIC SHIMS SHALL BE ALLOWED IF NEEDED.

MORTAR SHALL BE AIR ENTRAINED UNDERGROUND UTILITY MORTAR WHICH MEETS OR EXCEEDS ASTM C270 AND ASTM C387.

ALL JOINTS IN MANHOLE TO HAVE "O" RING RUBBER GASKETS.

4" PVC DRAINTILE CONNECTION.

SUMP MANHOLE REQUIRED WHEN THERE IS A 1.5' OR GREATER DROP BETWEEN INVERTS, AND THE FIRST STRUCTURE UPSTREAM FROM PIPE OUTLET. SEE STO-6.

MINIMUM SLAB THICKNESS 6" FOR STRUCTURES 14' IN DEPTH OR LESS. INCREASE THICKNESS 1" FOR EACH 4' OF DEPTH GREATER THAN 14', AND REINFORCE WITH 6"X6" 10/10 MESH.

PIPE SHALL BE CUT OUT 2" FROM INSIDE FACE OF WALL.

**DOG HOUSES MUST BE GROUTED BOTH INSIDE AND OUTSIDE OF STRUCTURE.

GROUT BOTTOM




2025 Standard Detail Plates

CATCH BASIN MANHOLE

LAST REVISION:
01/02/2025



PLATE NO.
STO-5

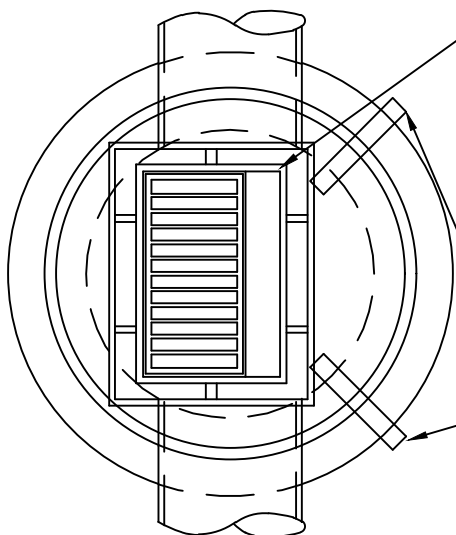

24"X36" SLAB OPENING FOR NEENAH R3067V. INSTALL R3290-A FOR DRIVEWAYS AND VALLEY GUTTERS. (VANE GRATE SHOWN). INSTALL NEENAH 3067VB TWO WAY GRATE AT ALL LOW POINTS.

DIMENSION FROM BACK OF CURB TO CENTER OF PIPE.

4' DIA. MH - 9" IN FROM BACK OF CURB

5' DIA. MH - 3" IN FROM BACK OF CURB

6' DIA. MH - 3" BEHIND BACK OF CURB

7' DIA. MH - 9" BEHIND BACK OF CURB 8' DIA. MH - 15" BEHIND BACK OF CURB

NO BLOCK STRUCTURES ALLOWED.

4" PVC DRAINTILE CONNECTION

NO BENDS GREATER THAN 45° SHALL BE ALLOWED

MINIMUM 0.4' OF RINGS, MAXIMUM 1' OF RINGS.

TOP 2 RINGS MUST BE 2" RINGS.

FULL BED OF MORTAR BETWEEN EACH RING. 1 RING

WITH MORTAR = 0.2'. INSTALL EXTERNAL

INFI-SHIELD OR APPROVED EQUAL.

ONLY PLASTIC SHIMS SHALL BE ALLOWED IF NEEDED.

6" PRECAST REINFORCED CONCRETE SLAB.

TOP OF BARREL SECTION UNDER TOP SLAB TO HAVE FLAT TOP EDGE SEALED WITH 2 BEADS OF RAMNEK OR APPROVED EQUAL.

ALL JOINTS IN MANHOLE TO HAVE "O" RING RUBBER GASKETS.

**DOG HOUSES MUST BE GROUTED BOTH INSIDE AND OUTSIDE OF STRUCTURE.

ONLY PLASTIC SHIMS SHALL BE ALLOWED IF NEEDED.


MORTAR SHALL BE AIR ENTRAINED UNDERGROUND UTILITY MORTAR WHICH MEETS OR EXCEEDS ASTM C270 AND ASTM C387.

4" PVC DRAINTILE CONNECTION.

PIPE SHALL BE CUT OUT 2" FROM INSIDE FACE OF WALL.

SUMP MANHOLE REQUIRED WHEN THERE IS A 1.5' OR GREATER DROP BETWEEN INVERTS, AND THE FIRST STRUCTURE UPSTREAM FROM PIPE OUTLET. SEE STO-6.

MINIMUM SLAB THICKNESS 6" FOR STRUCTURES 14' IN DEPTH OR LESS. INCREASE THICKNESS 1" FOR EACH 4' OF DEPTH GREATER THAN 14', AND REINFORCE WITH 6"X6" 10/10 MESH.

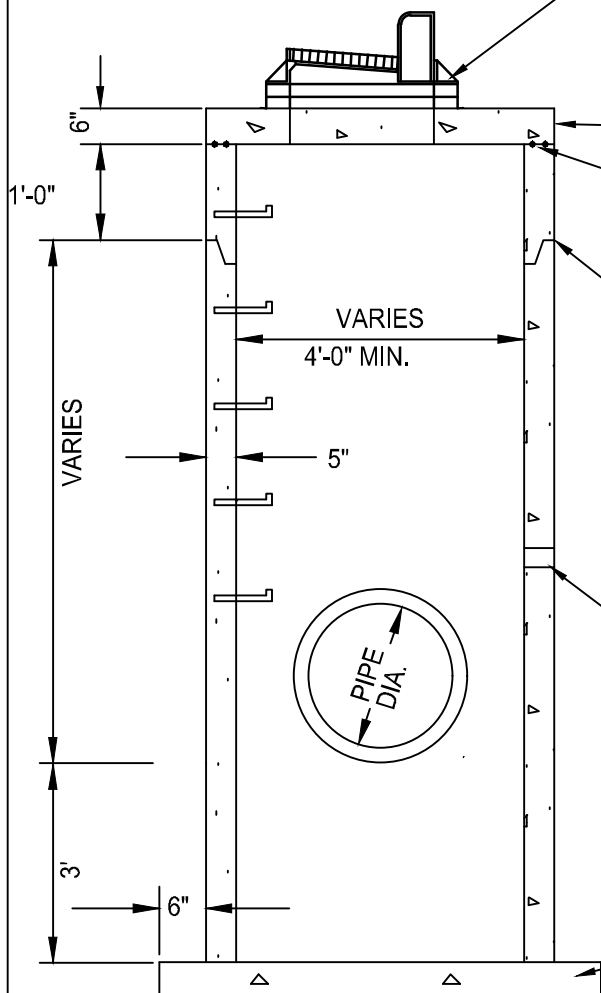


2025 Standard Detail Plates

CATCH BASIN MANHOLE WITH SUMP


LAST REVISION:
01/02/2025



PLATE NO.
STO-6

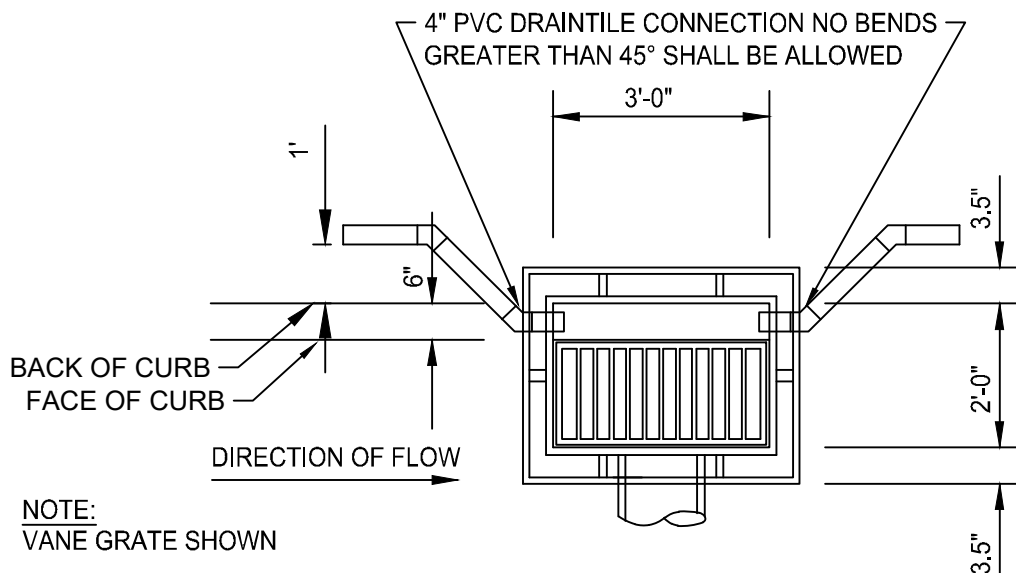

PLAN

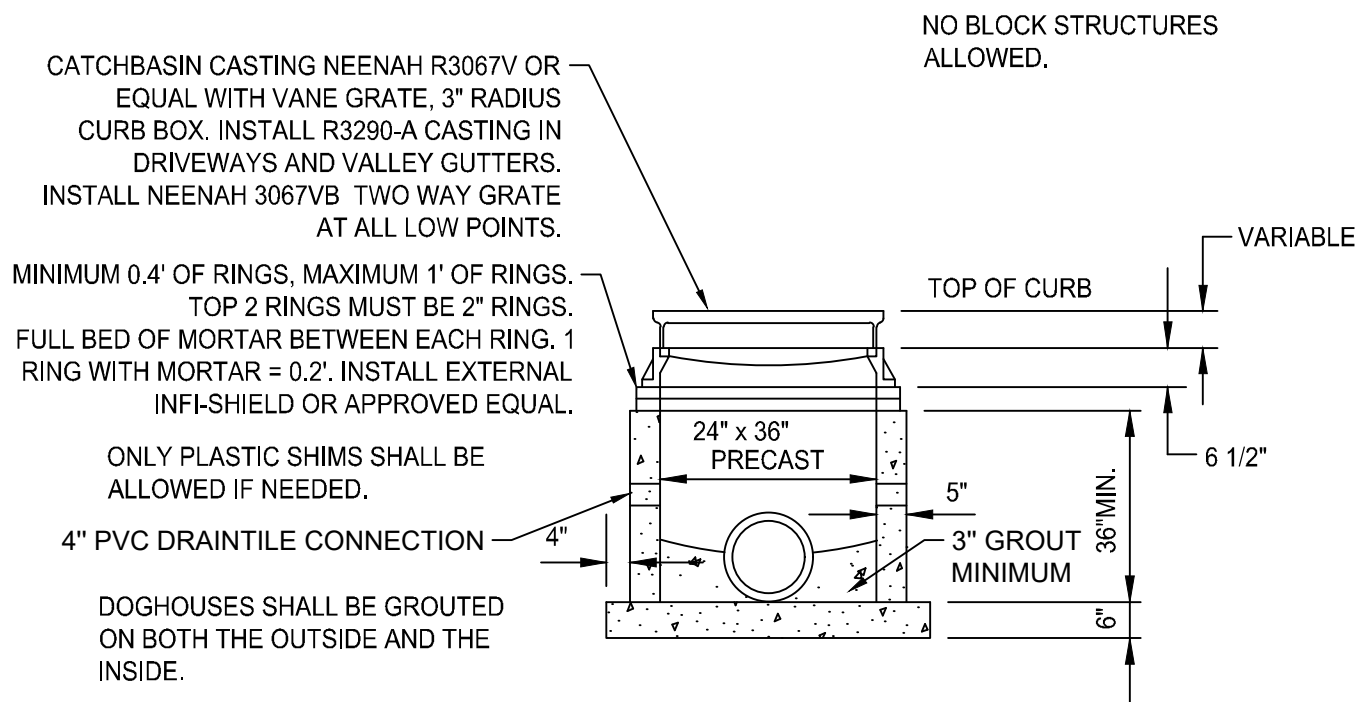

SECTION

ONLY PLASTIC SHIMS SHALL BE ALLOWED IF NEEDED.
MORTAR SHALL BE AIR ENTRAINED UNDERGROUND UTILITY MORTAR WHICH MEETS OR EXCEEDS ASTM C270 AND ASTM C387.




2025 Standard Detail Plates

2'X3' CATCHBASIN

LAST REVISION:
01/02/2025



PLATE NO.
STO-7

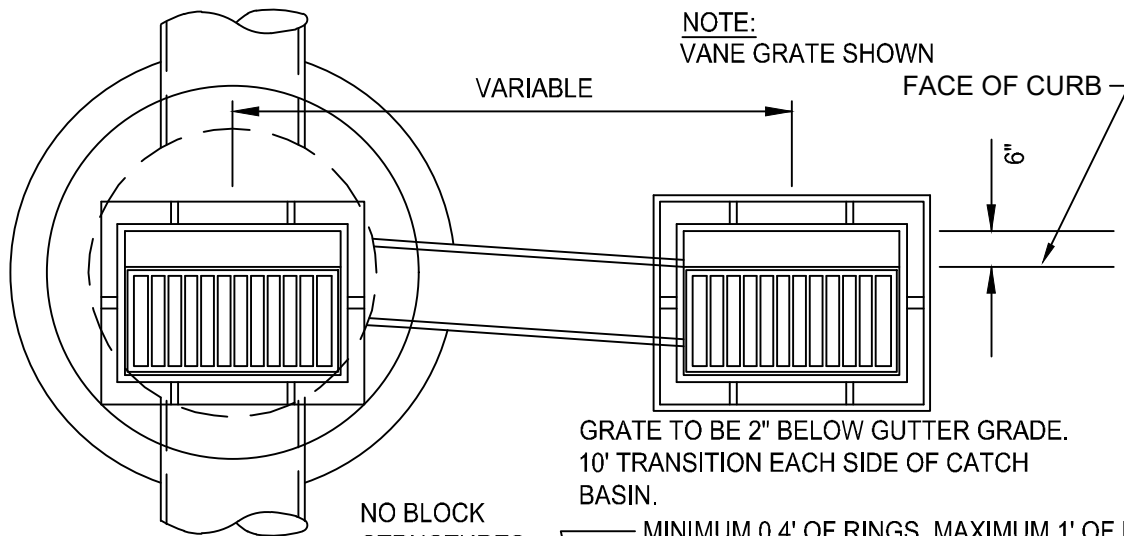


PLAN

6" PRECAST REINFORCED CONCRETE SLAB

CATCHBASIN CASTING NEENAH R3067V OR EQUAL WITH VANE GRATE. 3" RADIUS CURB BOX. INSTALL R3290L CASTING FOR DRIVEWAYS AND VALLEY GUTTERS. INSTALL NEENAH 3067VB TWO WAY GRATE AT ALL LOW POINTS.

NO BLOCK STRUCTURES ALLOWED.

MINIMUM 0.4' OF RINGS, MAXIMUM 1' OF RINGS. TOP 2 RINGS MUST BE 2" RINGS. FULL BED OF MORTAR BETWEEN EACH RING. 1 RING WITH MORTAR = 0.2'. INSTALL EXTERNAL INFI-SHIELD OR APPROVED EQUAL. ONLY PLASTIC SHIMS SHALL BE ALLOWED IF NEEDED. MORTAR SHALL BE AIR ENTRAINED UNDERGROUND UTILITY MORTAR WHICH MEETS OR EXCEEDS ASTM C270 AND ASTM C387.

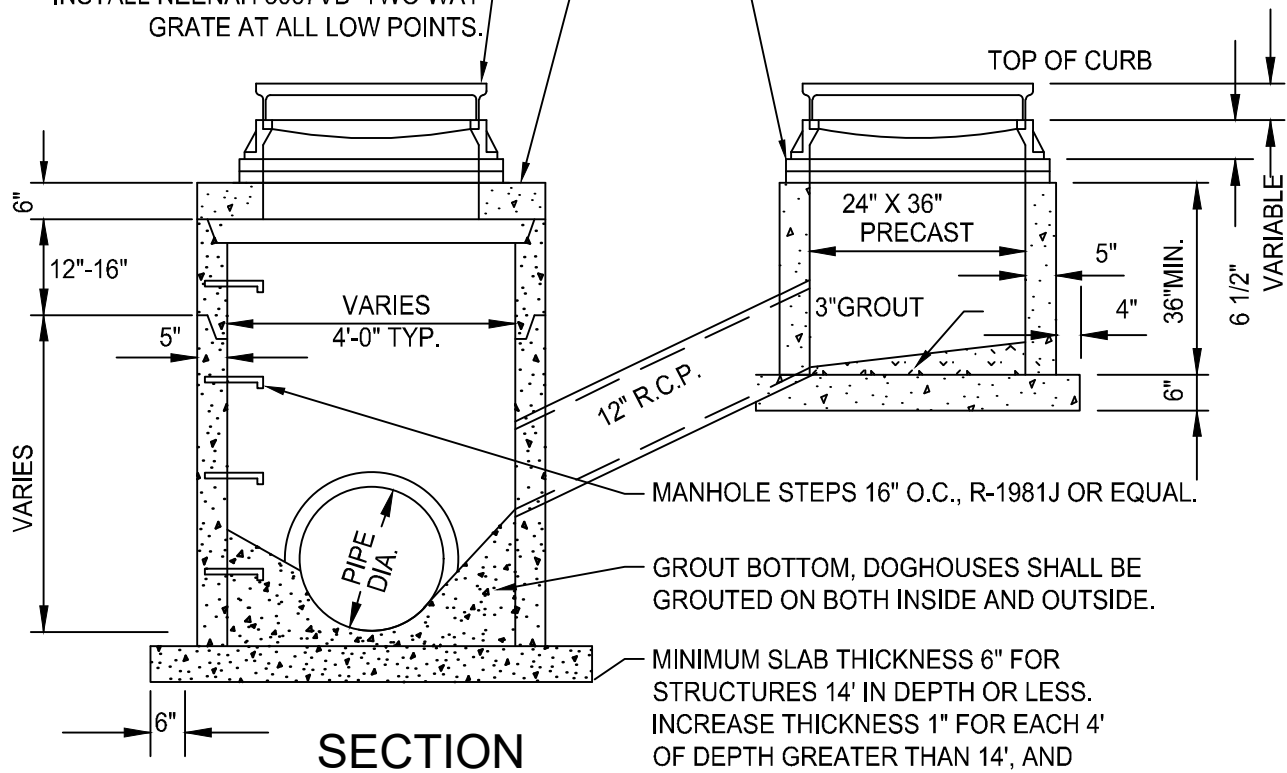


2025 Standard Detail Plates

DOUBLE CATCHBASIN - CATCHBASIN MANHOLE WITH 2'X3' CATCHBASIN

LAST REVISION:
01/02/2025



PLATE NO.
STO-8

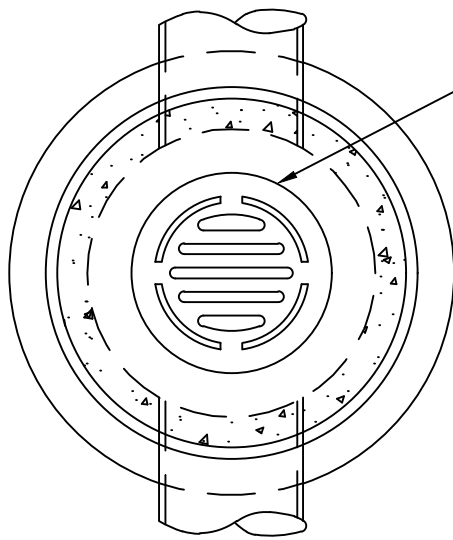


PLAN

NEENAH R-4342 CASTING OR EQUAL.

ONLY PLASTIC SHIMS SHALL BE ALLOWED IF NEEDED.
MORTAR SHALL BE AIR ENTRAINED UNDERGROUND UTILITY MORTAR WHICH MEETS OR EXCEEDS ASTM C270 AND ASTM C387.

NO BLOCK STRUCTURES ALLOWED.

MINIMUM 0.4' OF RINGS, MAXIMUM 1' OF RINGS.
TOP 2 RINGS MUST BE 2" RINGS.
FULL BED OF MORTAR BETWEEN EACH RING. 1 RING WITH MORTAR = 0.2'. INSTALL INFISHIELD OR APPROVED EQUAL IN BACKYARD STRUCTURES.

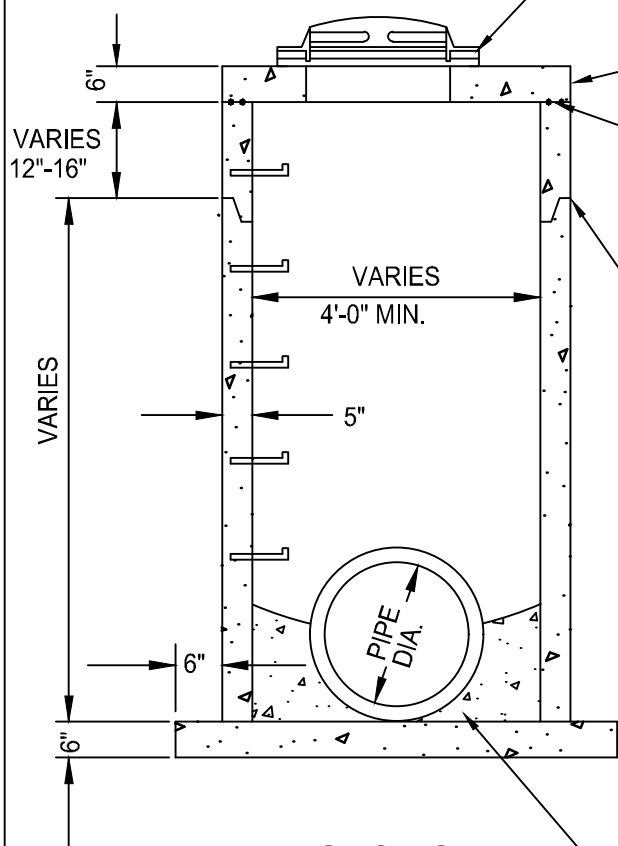

SECTION

6" PRECAST REINFORCED CONCRETE SLAB.

TOP OF BARREL SECTION UNDER TOP SLAB TO HAVE FLAT TOP EDGE SEALED WITH 2 BEADS OF RAMNEK OR APPROVED EQUAL.

ALL JOINTS IN MANHOLE TO HAVE "O" RING RUBBER GASKETS.

**DOG HOUSES MUST BE GROUTED BOTH INSIDE AND OUTSIDE OF STRUCTURE.

PIPE SHALL BE CUT OUT 2" FROM INSIDE FACE OF WALL.

MINIMUM SLAB THICKNESS 6" FOR STRUCTURES 14' IN DEPTH OR LESS. INCREASE THICKNESS 1" FOR EACH 4' OF DEPTH GREATER THAN 14', AND REINFORCE WITH 6"X6" 10/10 MESH.

GROUT BOTTOM




2025 Standard Detail Plates

CATCHBASIN MANHOLE IN GREENSPACE

LAST REVISION:
01/02/2025



PLATE NO.
STO-9

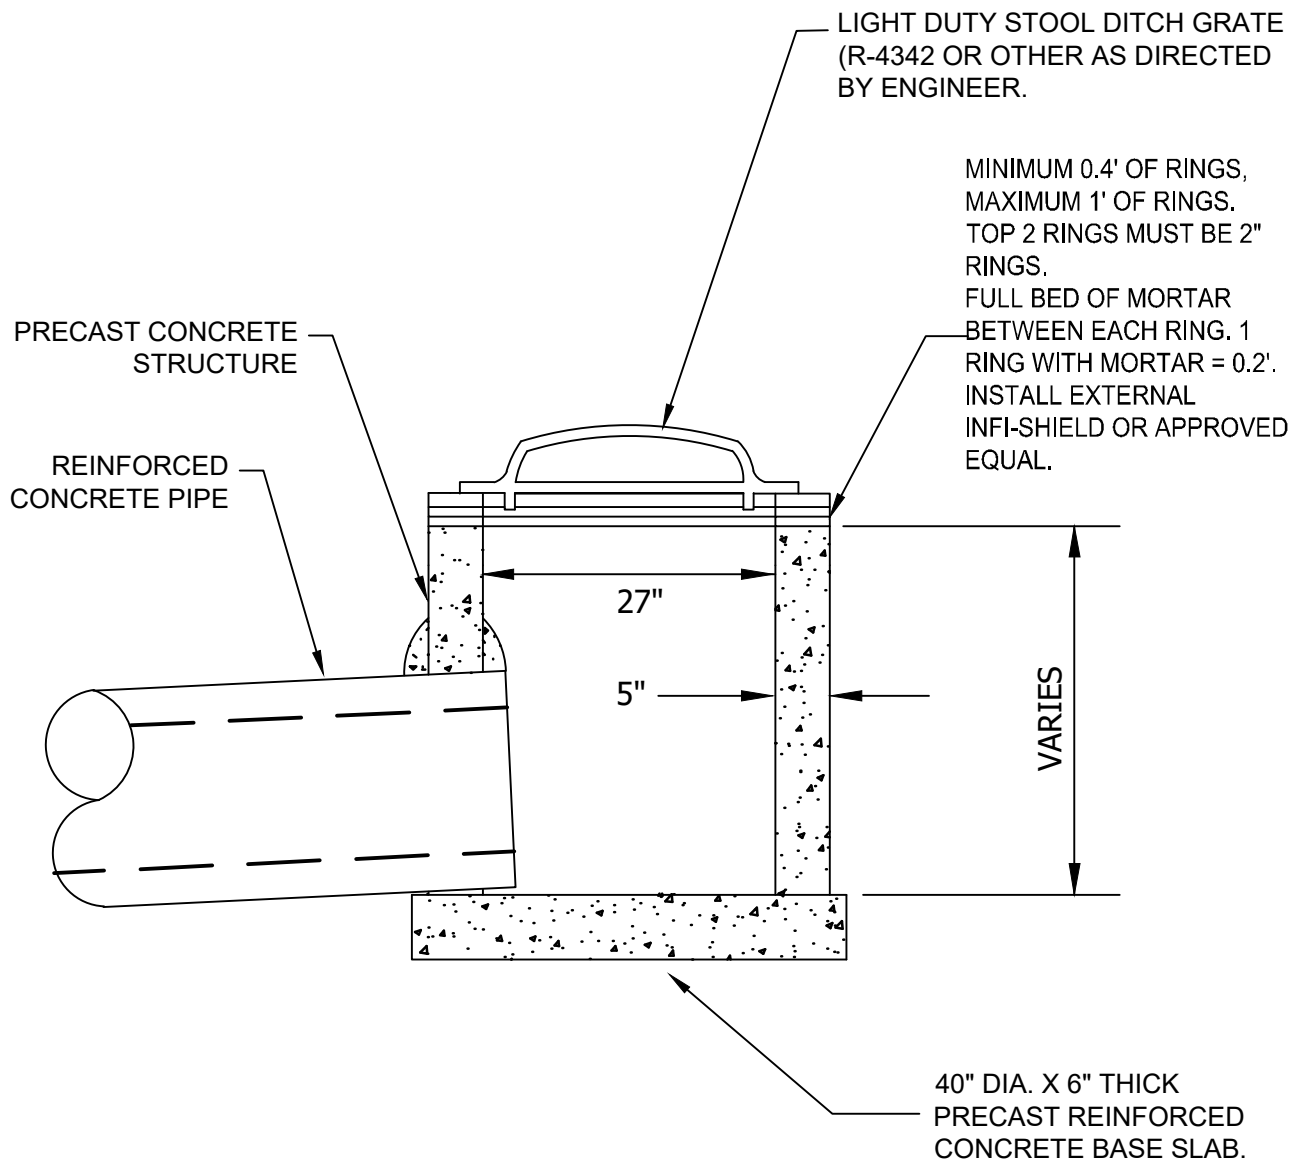

2025 Standard Detail Plates


PRECAST 27 INCH SHALLOW DEPTH BEEHIVE

LAST REVISION:
01/02/2025



PLATE NO.
STO-10

SEE CITY PLATE NO. STO-11 FOR RIPRAP PLACEMENT.

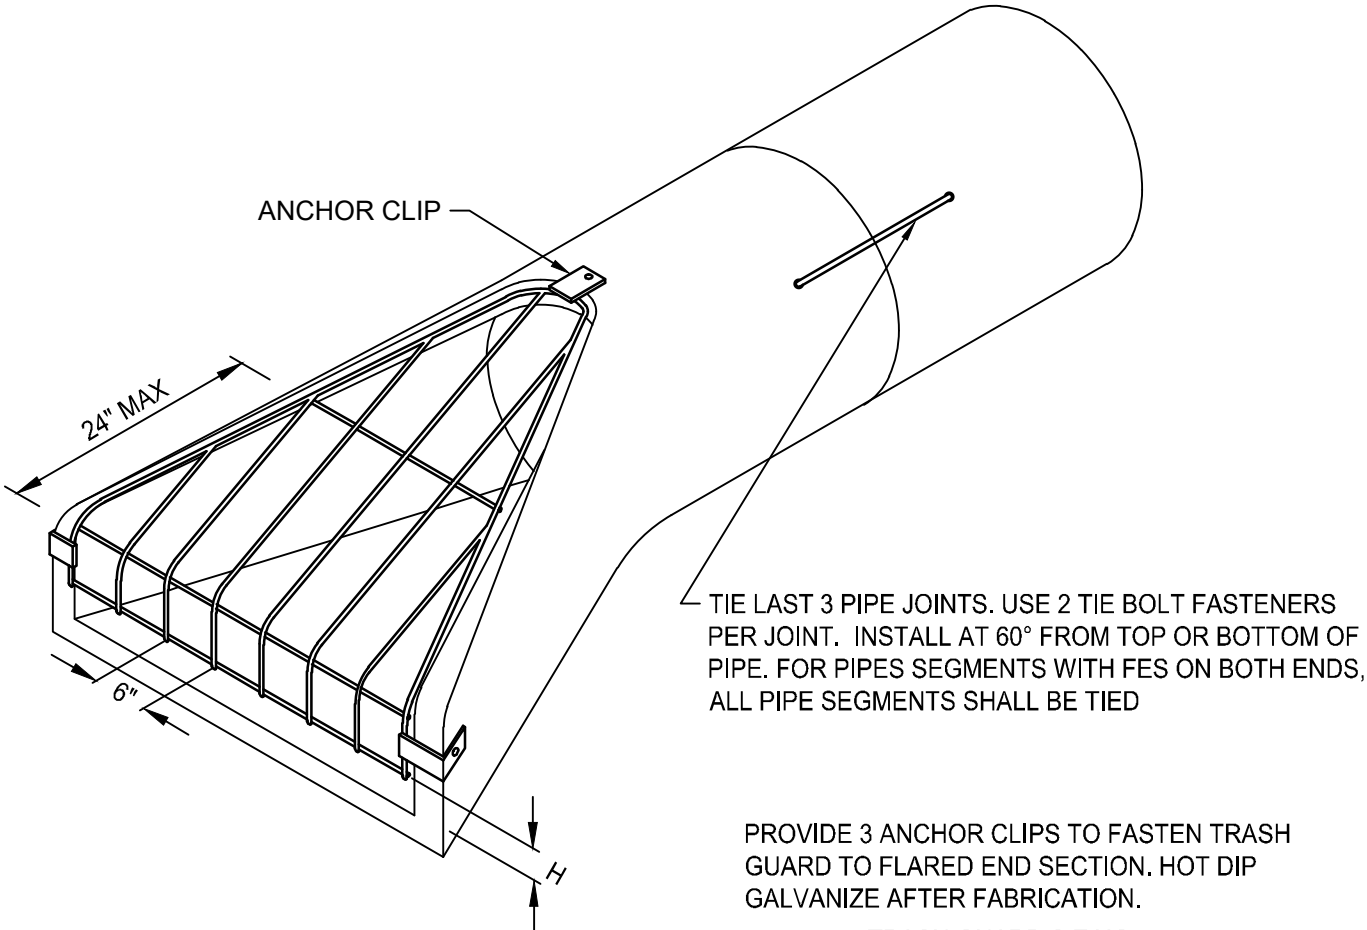

ISOMETRIC

PROVIDE 3 ANCHOR CLIPS TO FASTEN TRASH GUARD TO FLARED END SECTION. HOT DIP GALVANIZE AFTER FABRICATION.

TRASH GUARD SIZING			
PIPE SIZE	BARS	'H'	BOLTS
12"	3/4"Ø	2 1/2"	5/8"
15"	3/4"Ø	3"	5/8"
18"	3/4"Ø	4"	5/8"
21"-24"	1"Ø	4"	3/4"
27"-36"	1"Ø	5"	3/4"
42"	1"Ø	6"	3/4"
48"-54"	1 1/4"Ø	6"	1"
60"-72"	1 1/4"Ø	7"	1"
78"-90"	1 1/4"Ø	8"	1"

TRASH GUARDS TO BE INSTALLED ON ALL INLET FLARES, AND ON ALL FLARES LESS THAN 42"



2025 Standard Detail Plates

FLARED END SECTION AND TRASHGUARD

LAST REVISION:
07/24/2024



PLATE NO.

STO-11

(3) 1-1/4" HOLES
USE 3-1" BY 1' L-SHAPE
BOLTS AND TIE TO REBAR
VERTICAL AND HORIZONTAL

12" TYPICAL
3G52 CONCRETE

SEE DETAIL STO-09
FOR RIPRAP SECTION

2'-0" TYP.

PLAN

NOTES: TIE LAST 3 JOINTS

2'-0" TYP.

3Y43 CONCRETE

#4 EACH FACE
1'-0" (TYP.)
HORIZONTAL

SHEET PILE LIGHTWEIGHT
ASTM A-857, GR 33 TO 36
OR A-525 SUPER 5-5 GA

#3 AT 12" O.C.
STAGGERED
VERTICAL

45°
18"
3.12"
16.9 IBS / FT.
.209 THICKNESS

SHEET
PILING

OUTSIDE WITH OF END
SECTION PLUS 4'-0"

7'-0" TYP.

ELEVATION

NOTES:

1. FLARED END SECTION 21" IN DIAMETER OR LARGER (TYP.) TRASH GUARDS WILL BE GALVANIZED. SEE DETAIL STO-08.
2. BRING CONCRETE HEADWALL UP TO A POINT THAT WILL NOT HINDER THE OPERATION OF THE TRASH GUARD.
3. USE AS DIRECTED BY CITY ENGINEER.




2025 Standard Detail Plates

STORM SEWER PILING & CONCRETE END SECTION

LAST REVISION:
01/02/2025



PLATE NO.
STO-11A

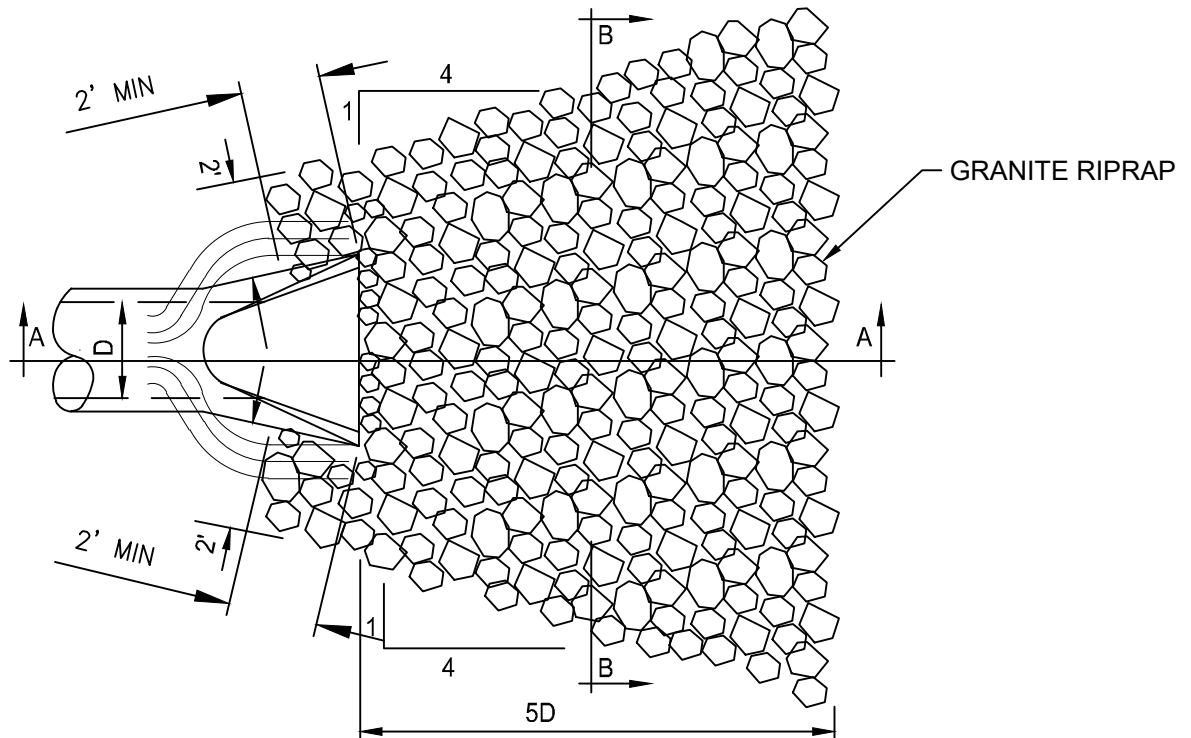


RIPRAP REQUIREMENTS

12" TO 18"	8-10 CUBIC YARDS CL.3
21" TO 27"	12-14 CUBIC YARDS CL.3
30" TO 36"	16-24 CUBIC YARDS CL.3
42" TO 48"	30-38 CUBIC YARDS CL.3
54" AND UP	62&UP CUBIC YARDS CL.4

PLAN


(ONE CUBIC YARD IS APPROXIMATELY 2,800 LBS.)

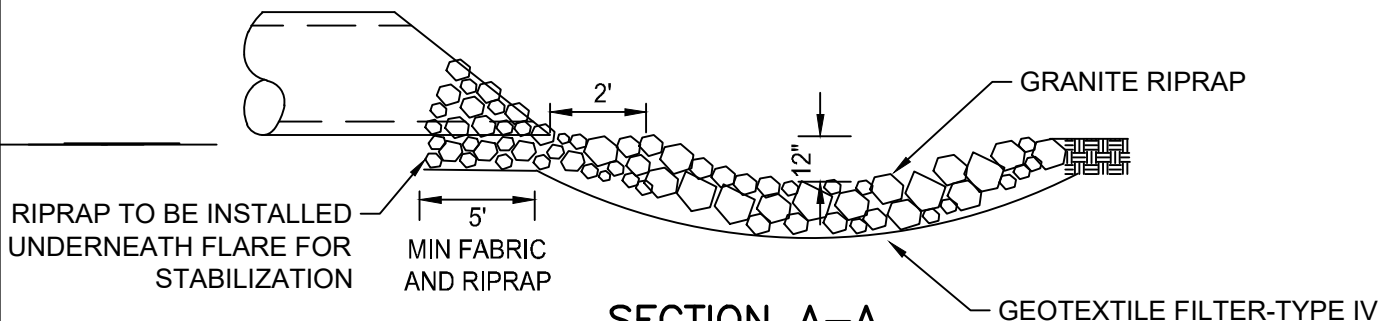

SECTION A-A

NOTES:

1. FILTER BLANKET REQUIRED UNDER RIPRAP OR 2 LAYERS OF 500X MIRAFI FABRIC OR EQUAL.
2. ONLY GRANITE RIPRAP TO BE USED AT OUTLETS.
3. GRADE A SWALE ADJACENT TO BOTH SIDES OF PIPE TO DIRECT WATER AWAY FROM FES.

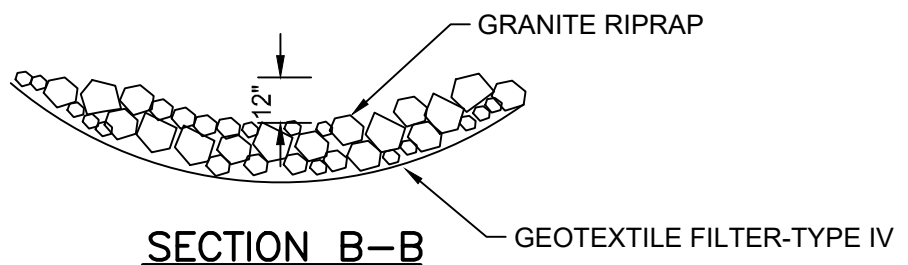

SECTION B-B




2025 Standard Detail Plates

RIPRAP AT OUTLETS

LAST REVISION:
07/24/2024





PLATE NO.
STO-12

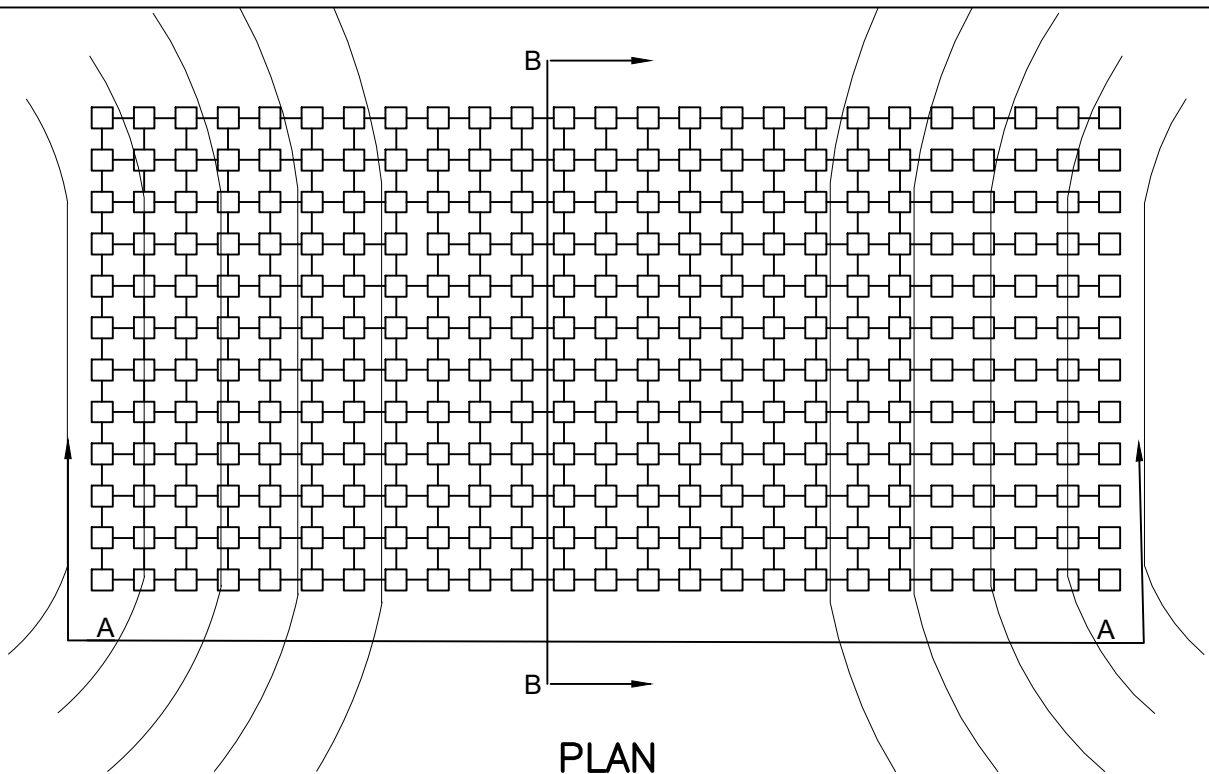

PLAN

NOTES:

1. TURF REINFORCEMENT MAT TO BE INSTALLED TO WATER LEVEL ON INLET SIDE AND DISCHARGE ELEVATION ON OUTLET SIDE.
2. TURF REINFORCEMENT MAT SHALL BE MNDOT ROLLED EROSION PREVENTION PRODUCT - CATEGORY 76, SLOPETAME3 BY INVISIBLE, OR CITY APPROVED EQUAL AND INSTALLED PER MANUFACTURES RECOMMENDATIONS

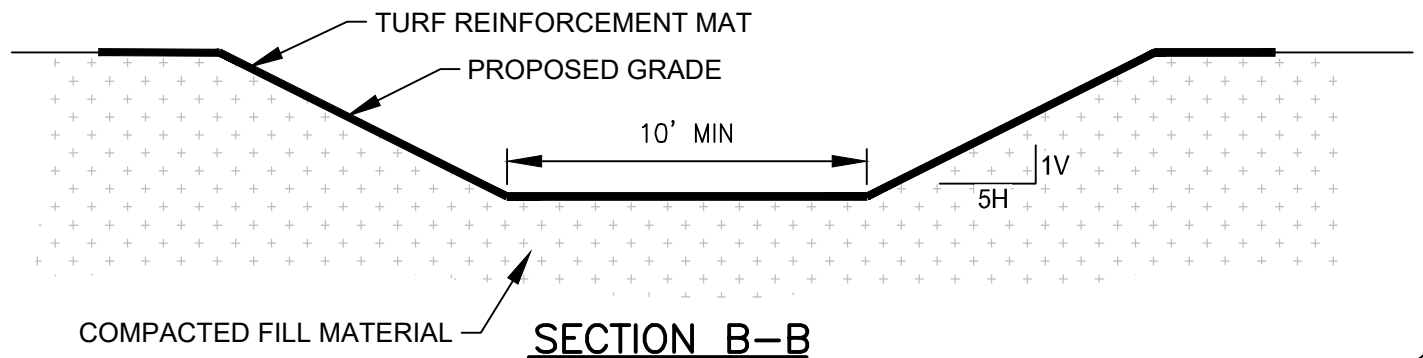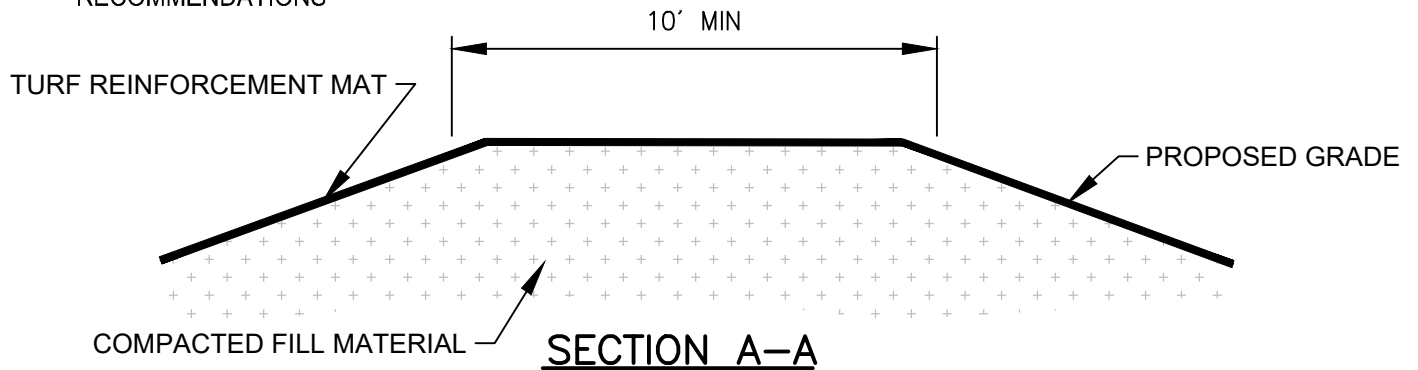


2025 Standard Detail Plates

TYPICAL POND EOF

LAST REVISION:
07/24/2024




PLATE NO.
STO-13

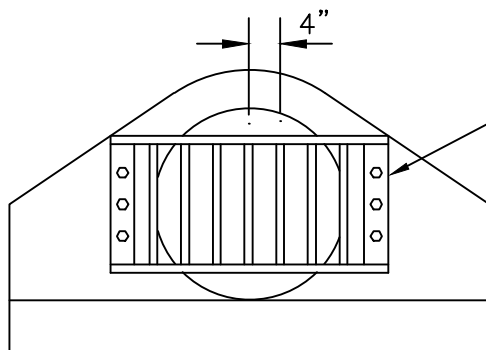

STEEL PLATE - BOLT TO CONCRETE WITH STAINLESS STEEL BOLTS. HOT DIP GALVANIZE AFTER FABRICATION.

FRONT VIEW

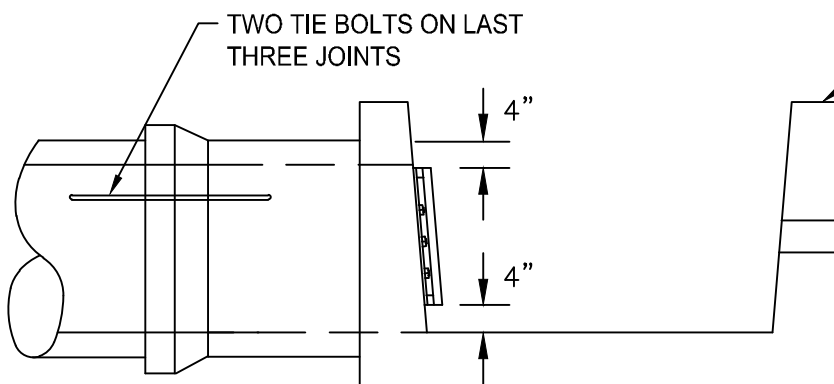

TWO TIE BOLTS ON LAST THREE JOINTS

ENERGY DISSIPATOR: SEE MNDOT STANDARD PLATE NO. 5200B

SIDE VIEW

SIZE OF PIPE	SIZE OF PLATE	BARS	BOLTS
12" TO 18"	1/4"X2"	3/4"Ø	2-5/8"Ø
21" TO 48"	1/4"X3"	1"Ø	3-3/4"Ø

NOTE:

TIE LAST 3 JOINTS. USE 2 TIE BOLT FASTENERS PER JOINT INTALLED AT 60Ø FROM TOP OR BOTTOM OF PIPE.




2025 Standard Detail Plates

ENERGY DISSIPATOR AND TRASH GUARDS

LAST REVISION:
07/24/2024



PLATE NO.
STO-14

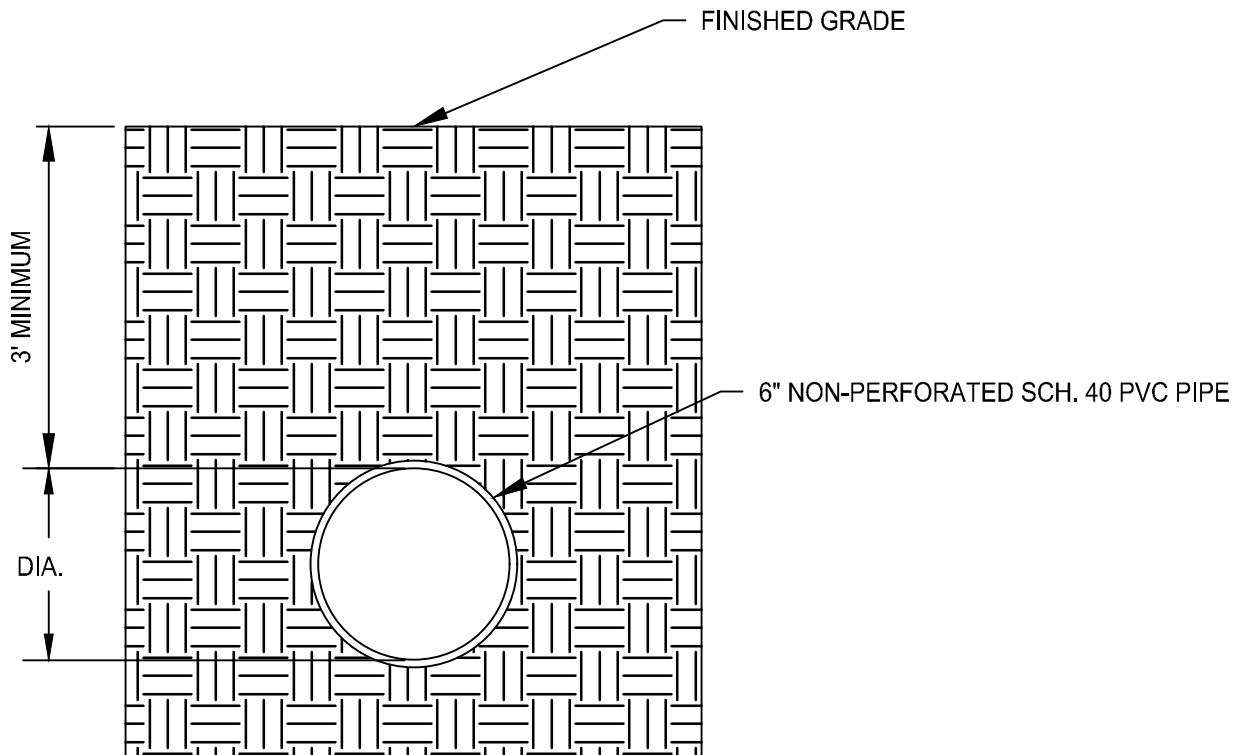

TRENCH DETAIL

NOTES:

1. MIN COVER OF 3' TO TOP OF DRAINTILE FROM FINISH GRADE
2. DRAINAGE SWALES THAT HAVE LESS THAN 2% SLOPE SHALL USE DETAIL STO-15A




2025 Standard Detail Plates

BACKYARD DRAIN TILE FOR SUMP CONNECTION

LAST REVISION:
01/02/2025




PLATE NO.
STO-15

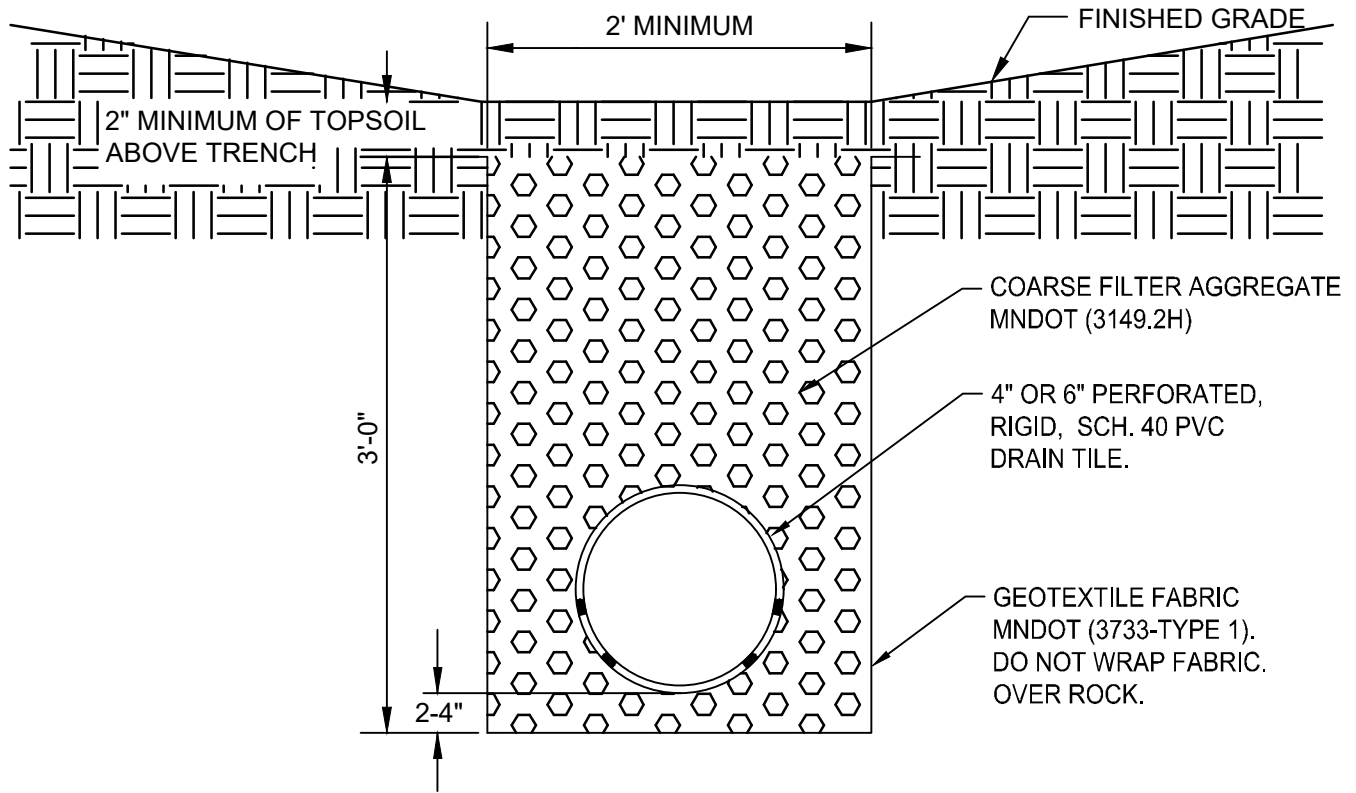

TRENCH DETAIL

NOTE:

1. FABRIC TO BE WRAPPED ON THE SIDES AND UNDER THE FILTER AGGREGATE. DO NOT WRAP FABRIC OVER TOP OF AGGREGATE.
2. PLACE HOLES UP WHEN SUMP PUMP LATERALS ARE PRESENT.

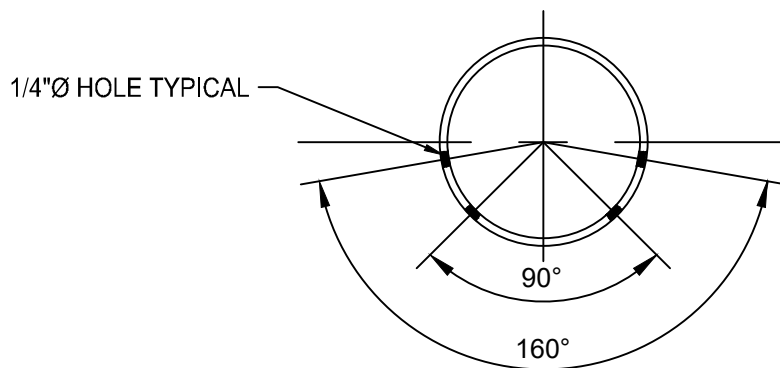

PIPE DETAIL



2025 Standard Detail Plates

PERFORATED DRAINTILE SWALE INSTALLATION


LAST REVISION:
1/02/2025




PLATE NO.
STO-15A

BITUMINOUS OR GRAVEL TO MATCH
SURFACE OF EXISTING ROADWAY
REQUIRED TO RIGHT OF WAY LINE


RIGHT OF WAY LINE

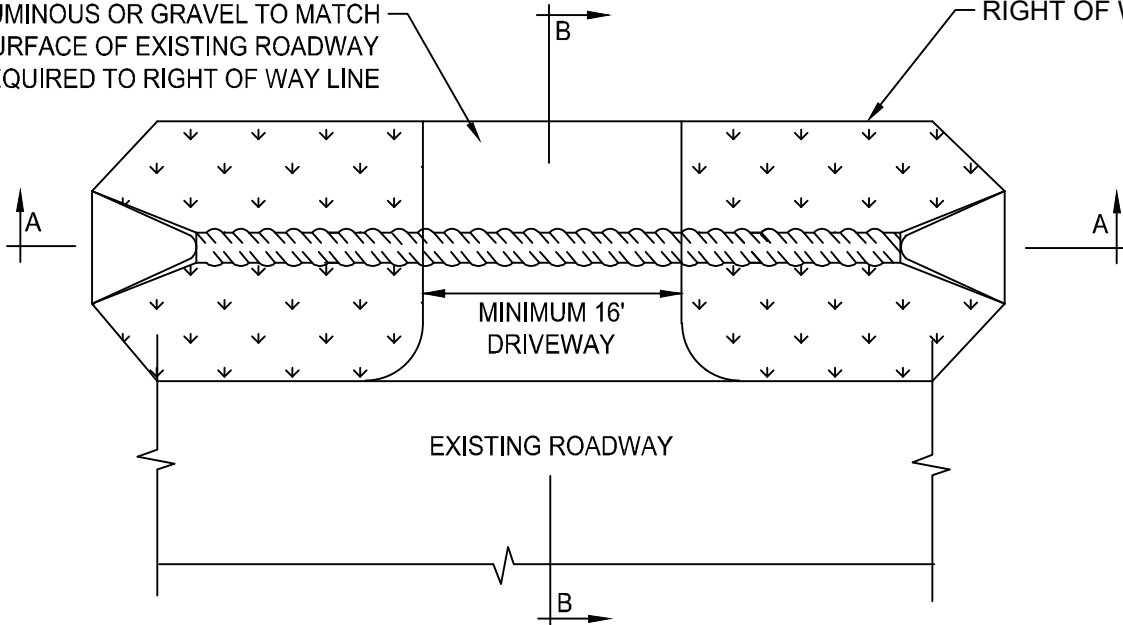

PLAN

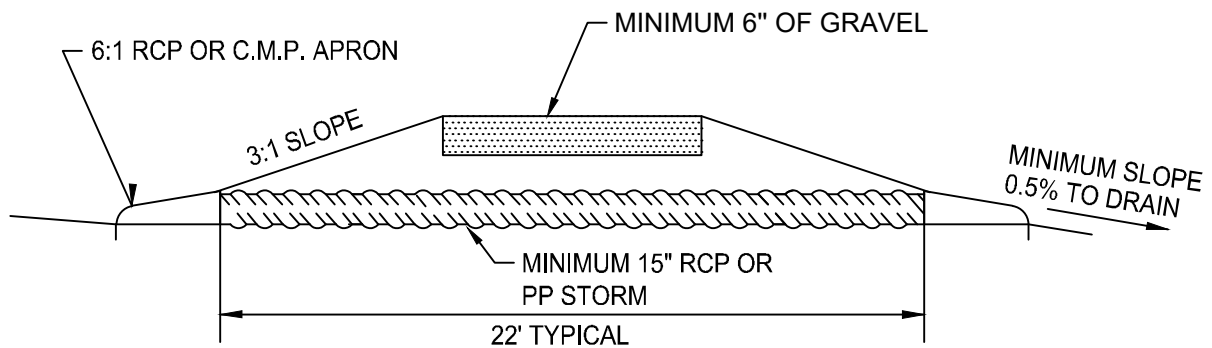

SECTION A-A

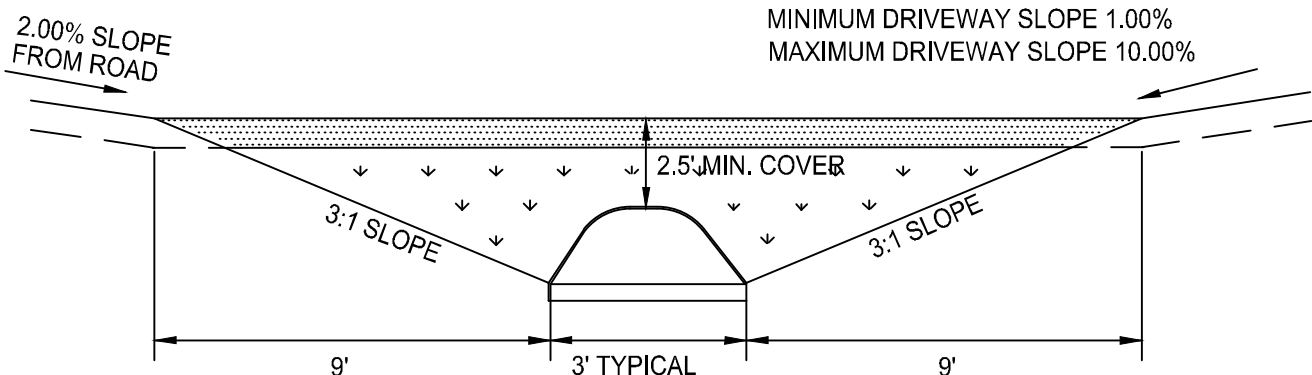

SECTION B-B




2025 Standard Detail Plates

RURAL RESIDENTIAL DRIVEWAY CULVERT

LAST REVISION:
07/24/2024




PLATE NO.
STO-16

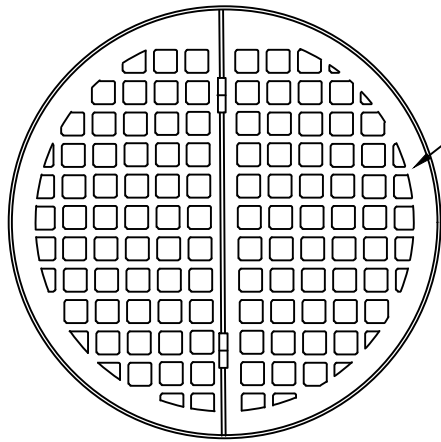

GRATE DETAIL

HAALA POND SKIMMER PLATE
STYLE OR APPROVED EQUAL

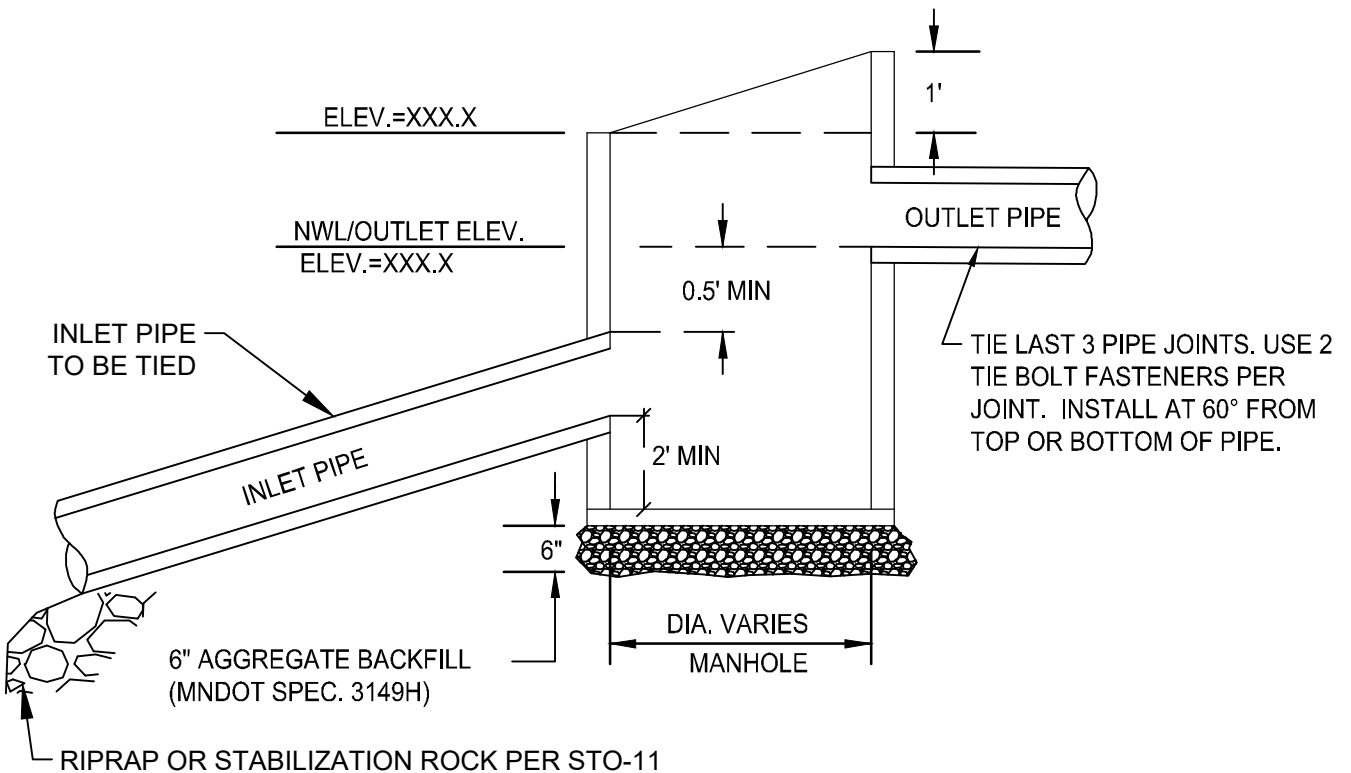


2025 Standard Detail Plates

STORM SEWER SKIMMER STRUCTURE

LAST REVISION:
07/24/2024




PLATE NO.
STO-17

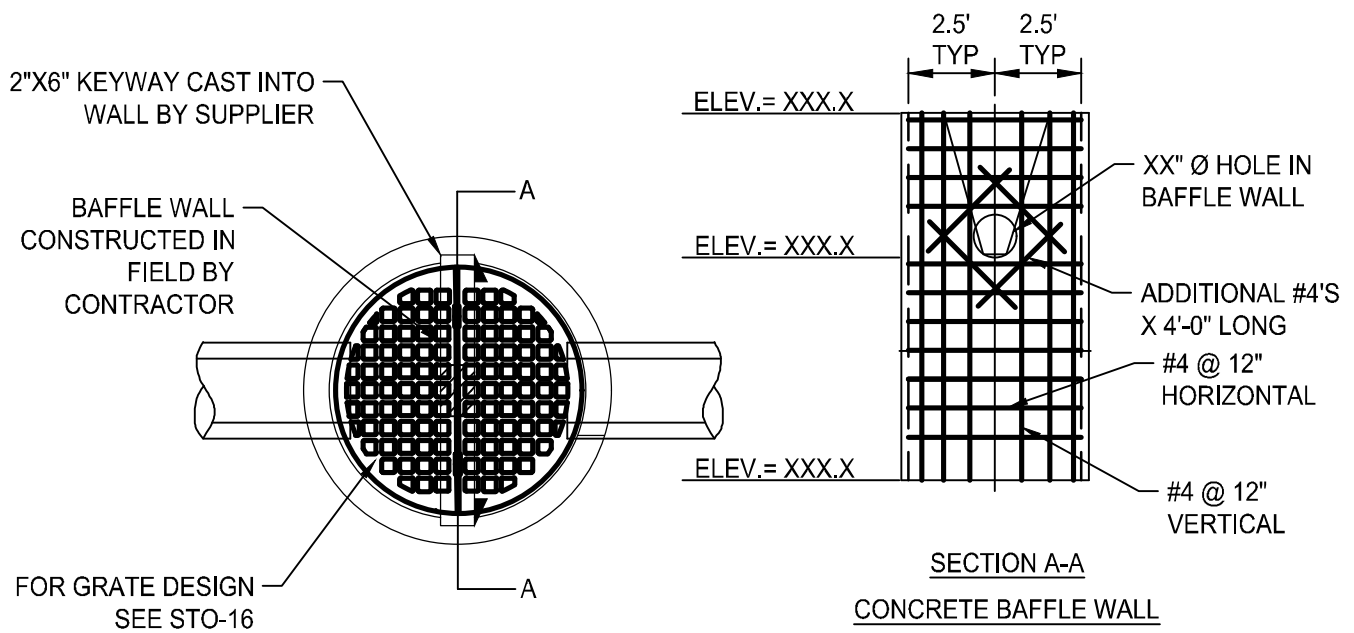

WHEN FEASIBLE, SET INVERT FOR OUTLET PIPE BELOW NWL TO IMPROVE PIPE COVER AND MINIMIZE SLOPE AROUND SKIMMER

NOTE:

1. BAFFLE WALL TO BE SINGLE PIECE AND WATERTIGHT.
2. SIKAFLEX SEALANT OR APPROVED EQUAL TO MAKE WATERTIGHT
3. WHEN BAFFLE WALL HEIGHT IS GREATER THAN 3' ABOVE NWL THE FOLLOWING SHALL BE REQUIRED:
 - STEPS
 - 6' DIAMETER MH

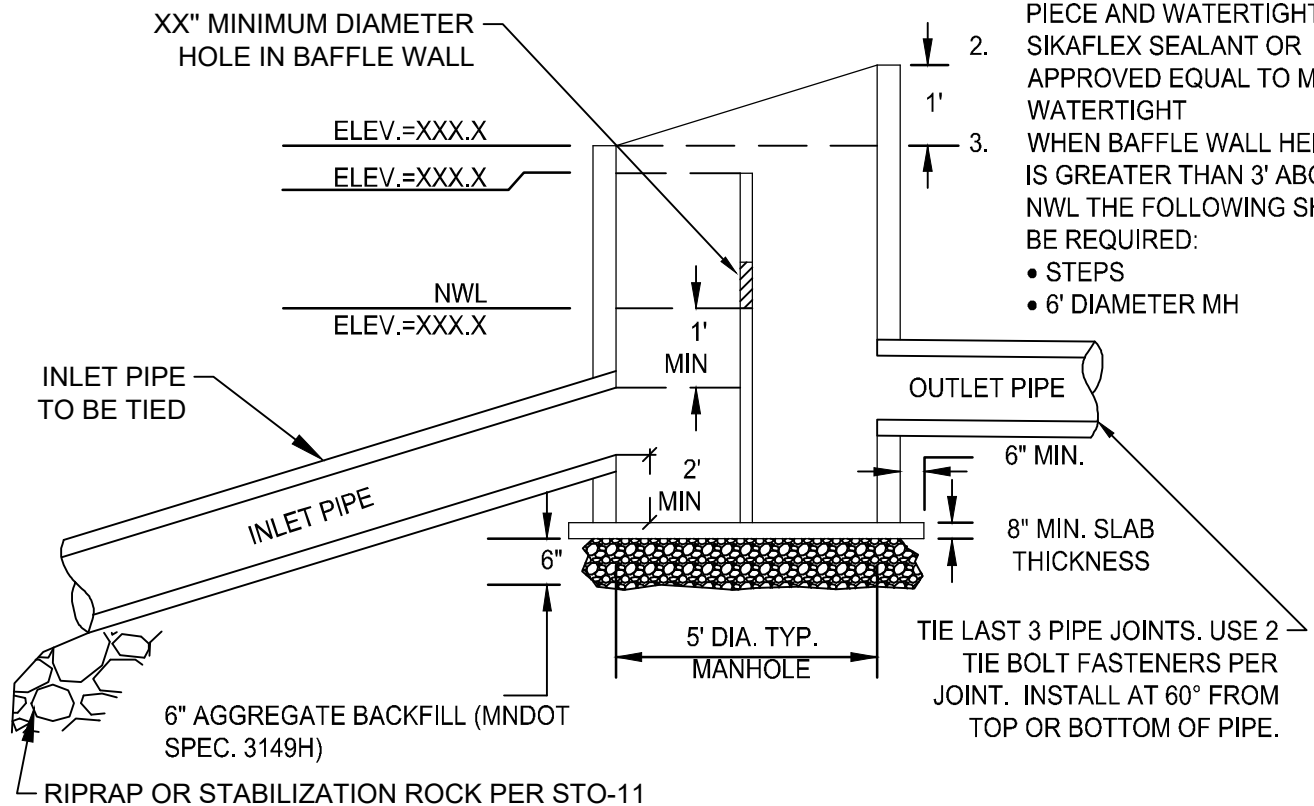



2025 Standard Detail Plates

SKIMMER STRUCTURE WITH CONCRETE BAFFLE WALL

LAST REVISION:
07/24/2024



PLATE NO.
STO-18

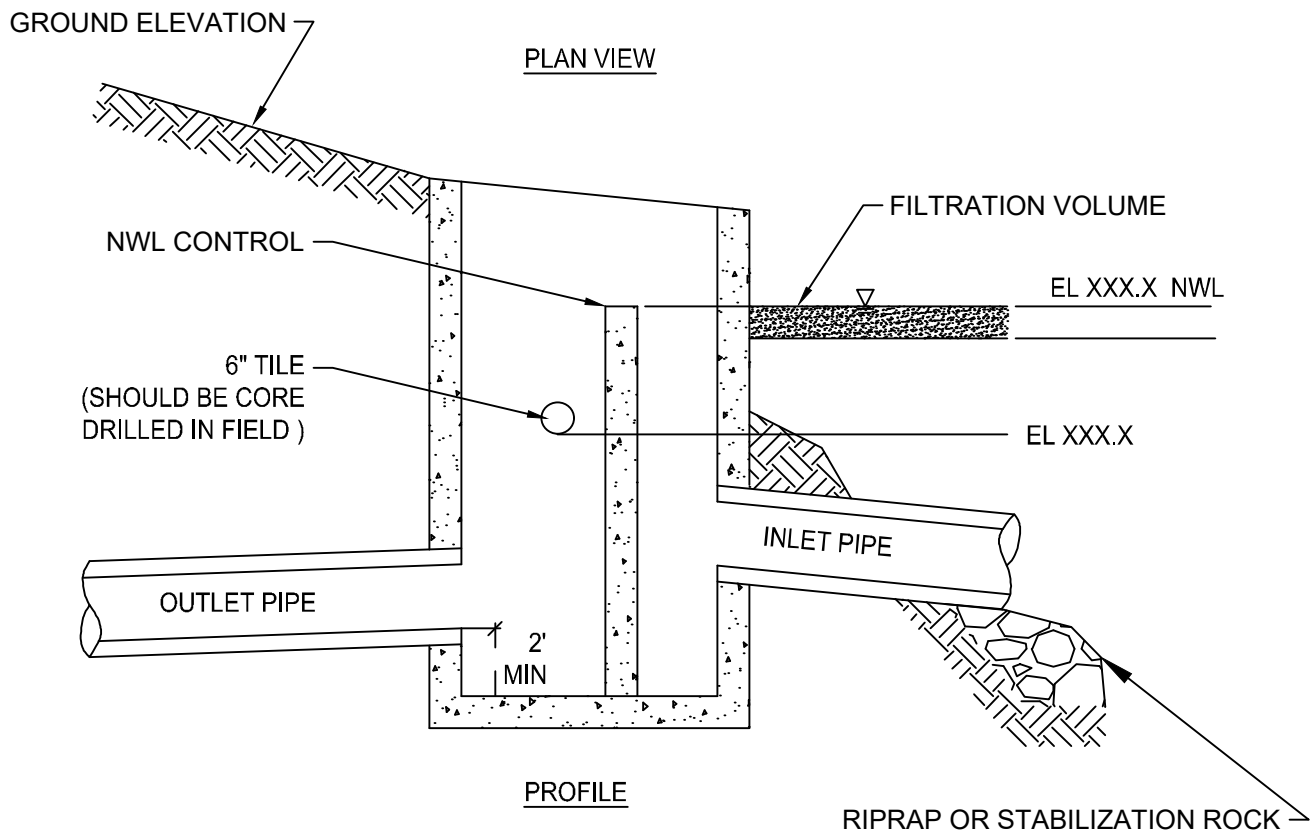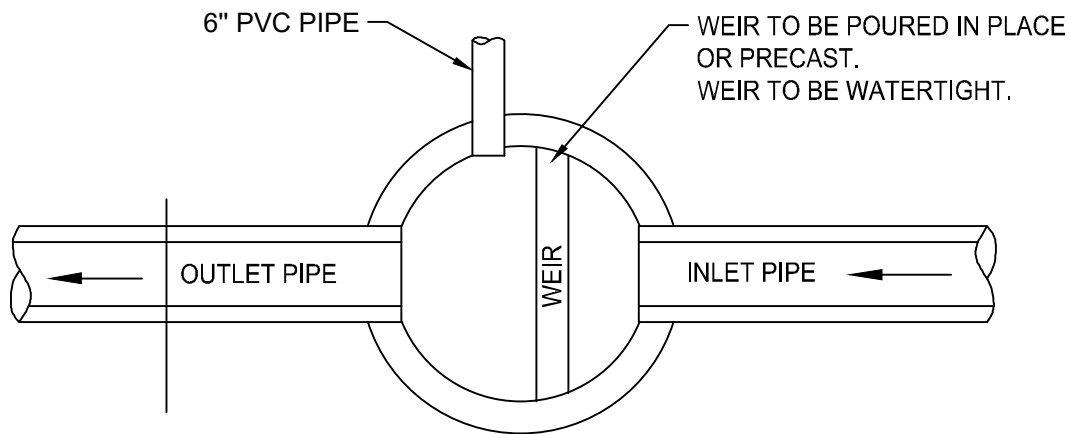

NOTE:
 TILE CAN DAYLIGHT SEPARATELY FROM OUTLET STRUCTURE.
 TILE MUST BE ABOVE THE TOP OF OUTLET PIPE AND APPROXIMATELY 1 FOOT BELOW ELEVATION OF TILE
 IN THE TRENCH.
 INLET PIPE SHALL BE TIED AT ALL JOINTS AND ATTACHED TO THE STRUCTURE.






2025 Standard Detail Plates

OUTLET CONTROL STRUCTURE

LAST REVISION:
 07/24/2024



PLATE NO.
STO-19

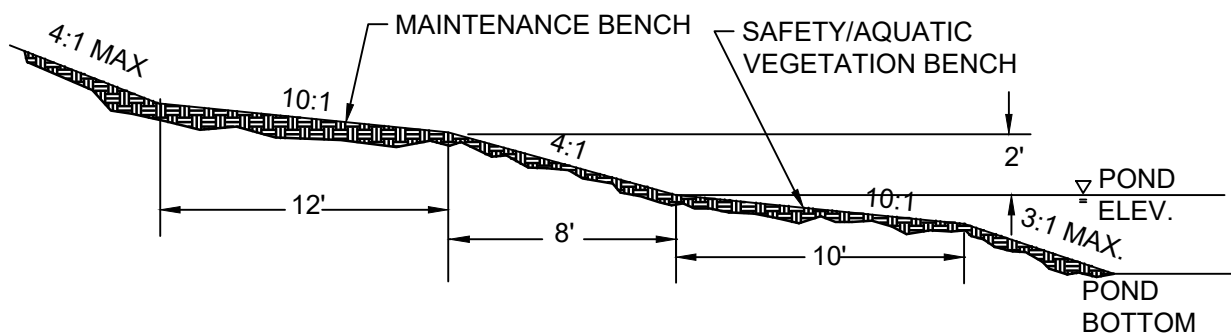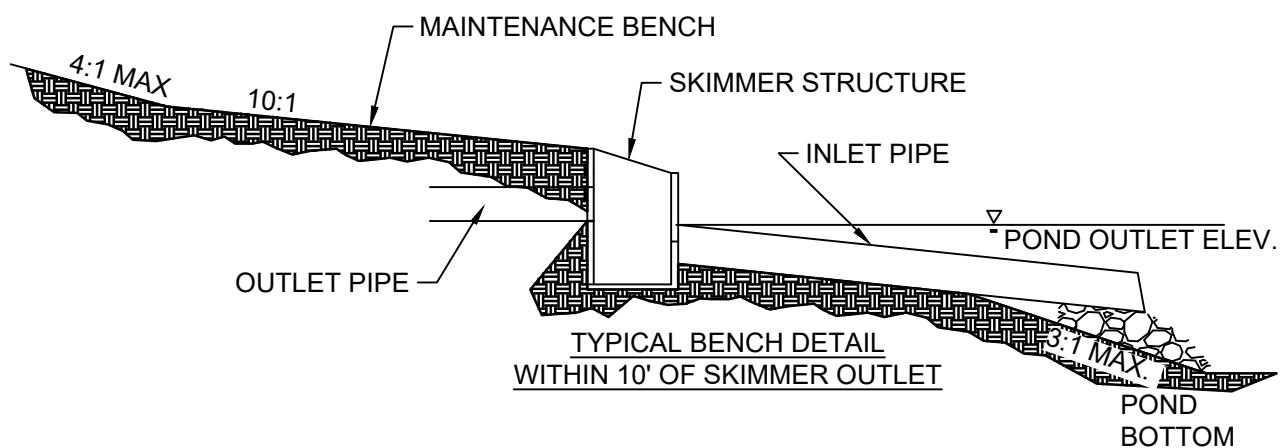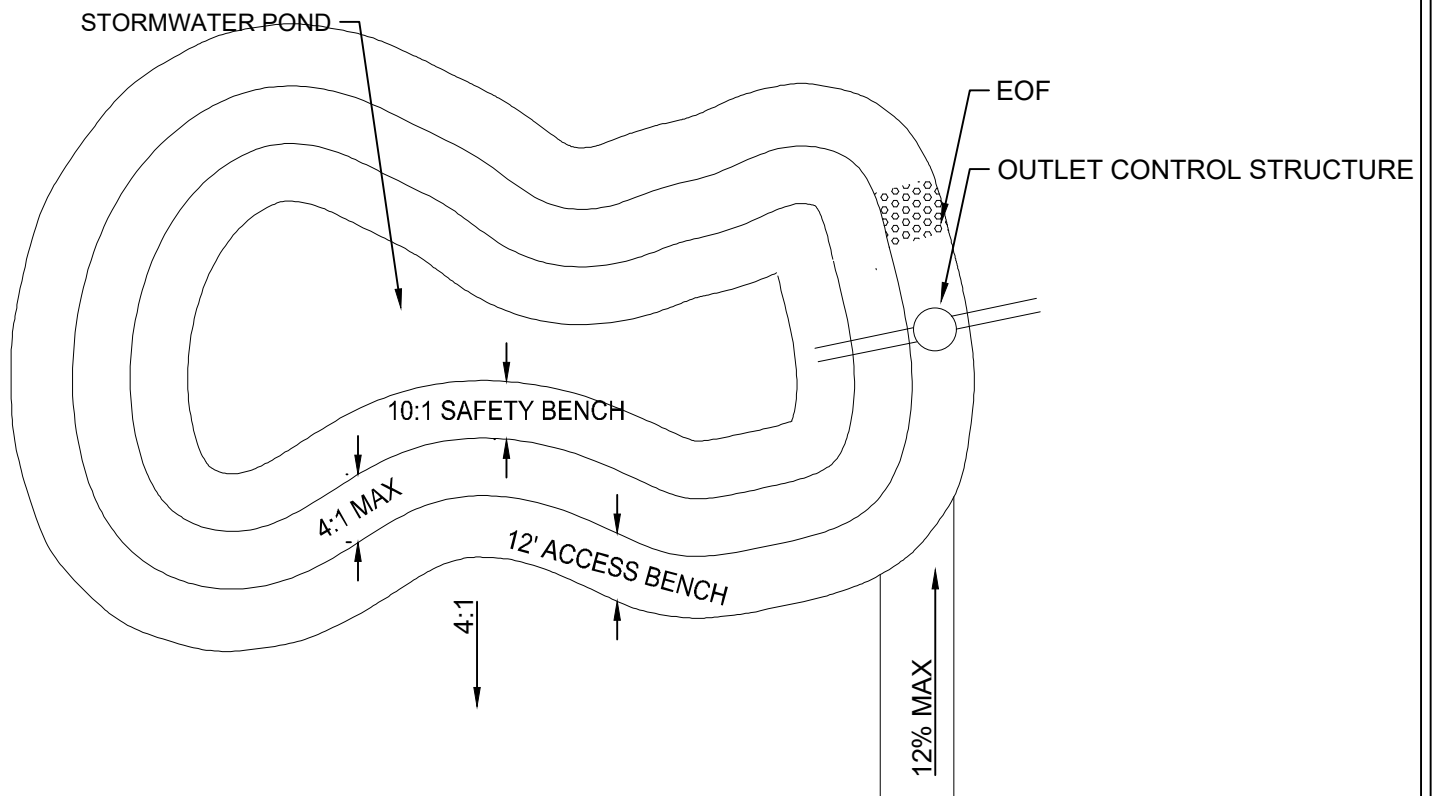

TYPICAL BENCH DETAIL



2025 Standard Detail Plates


TYPICAL MAINTENANCE ACCESS BENCH

LAST REVISION:
07/24/2024




PLATE NO.
STO-19A

PLAN VIEW

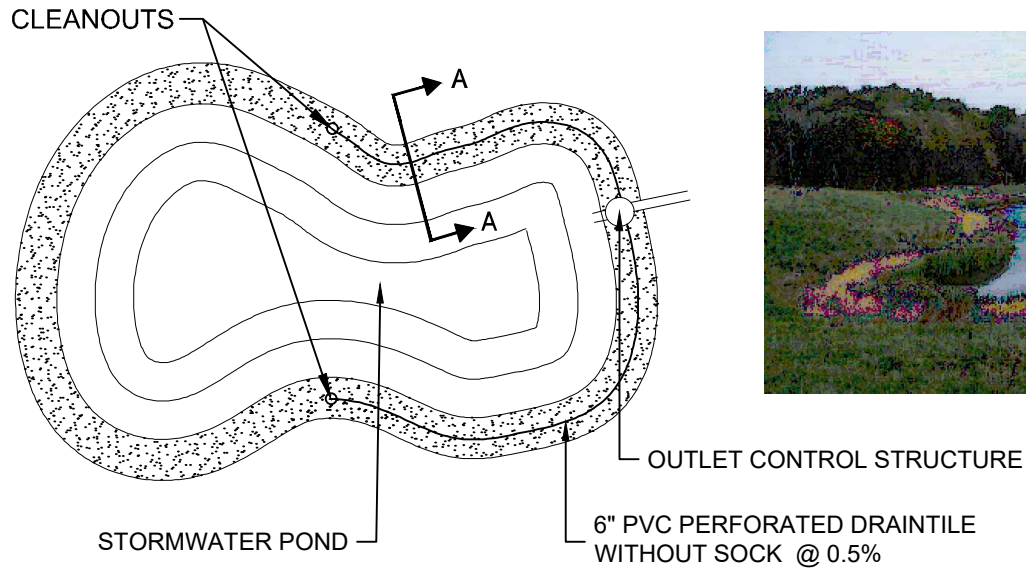

SECTION A - A

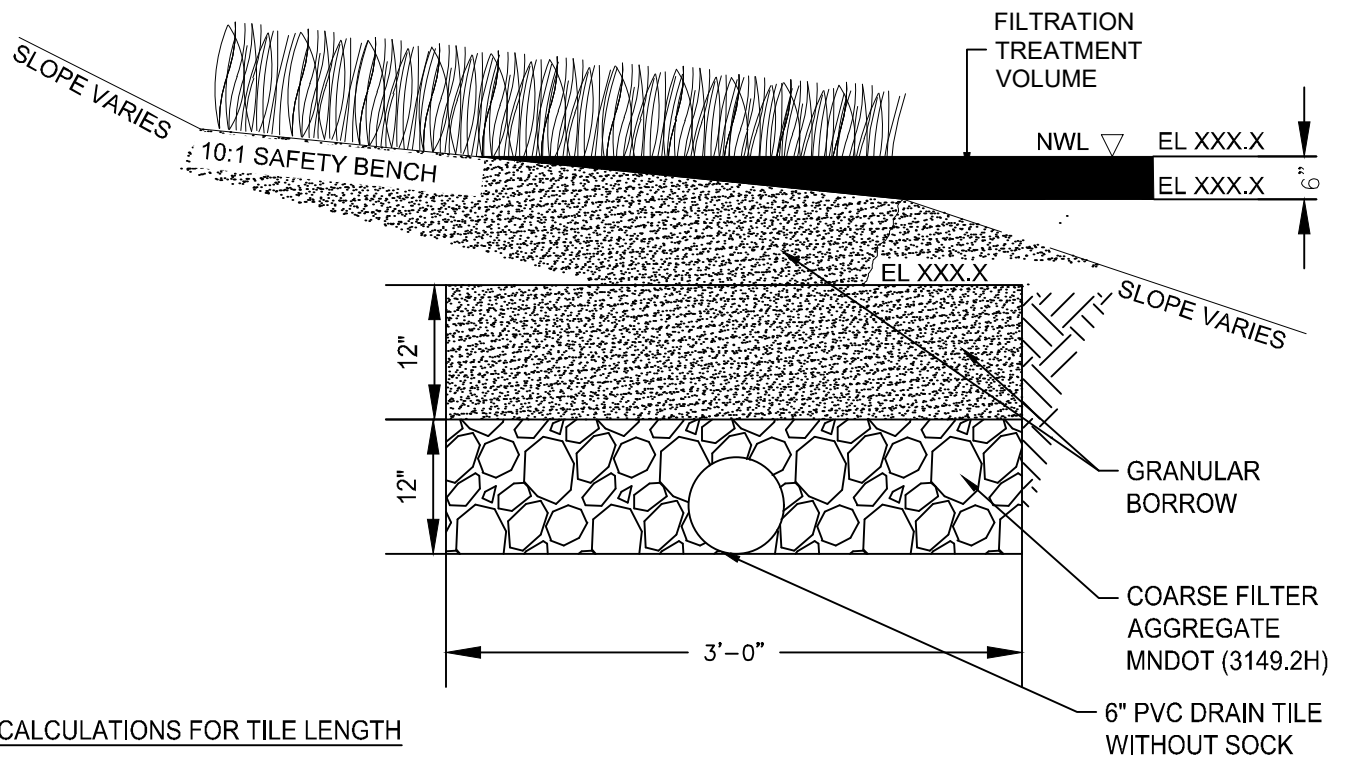

CALCULATIONS FOR TILE LENGTH

TO DETERMINE THE AREA(SF) OF TRENCH NEEDED, DIVIDE THE PONDED VOLUME (CF) BY 17 CF/SF. (5,000 CF / 17 CF/SF = 294 SF TRENCH / 3 FT = 98 LF OF TRENCH)




2025 Standard Detail Plates

TYPICAL FILTRATION BENCH

LAST REVISION:
07/24/2024



PLATE NO.
STO-20

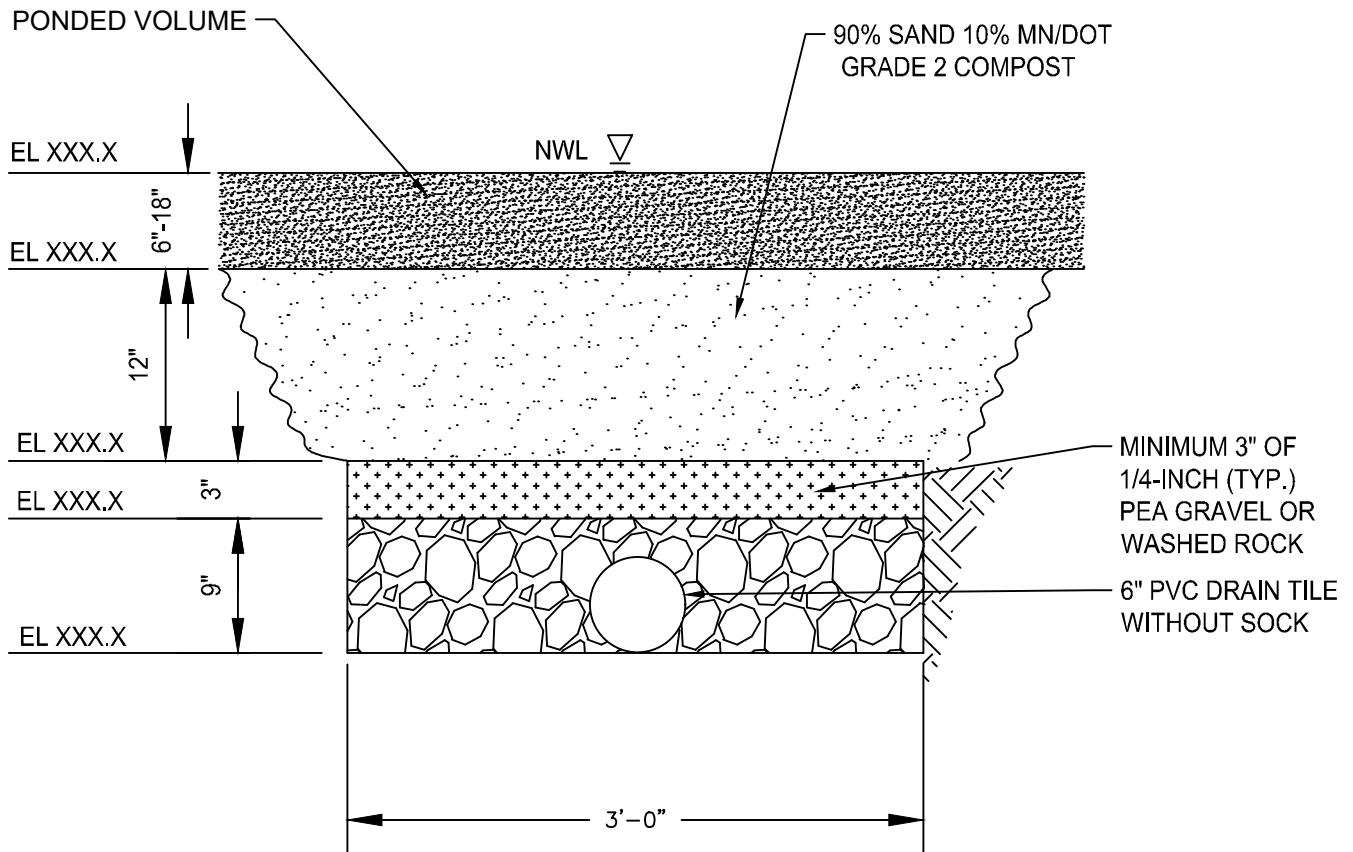

2025 Standard Detail Plates

TYPICAL FILTRATION TRENCH


LAST REVISION:
07/24/2024



PLATE NO.
STO-21

ON BOTH SIDES, THIN TREES FROM TOP OF REGRADED BANK TO 5' MINIMUM (35' PREFERRED) SETBACK TO ALLOW SUNLIGHT TO REACH THE GROUND.

KEEP TREE DENSITY TO ONE TREE EVERY 30' TO 50' APART TO RE-ESTABLISH NATIVE GRASS GROUND COVER.

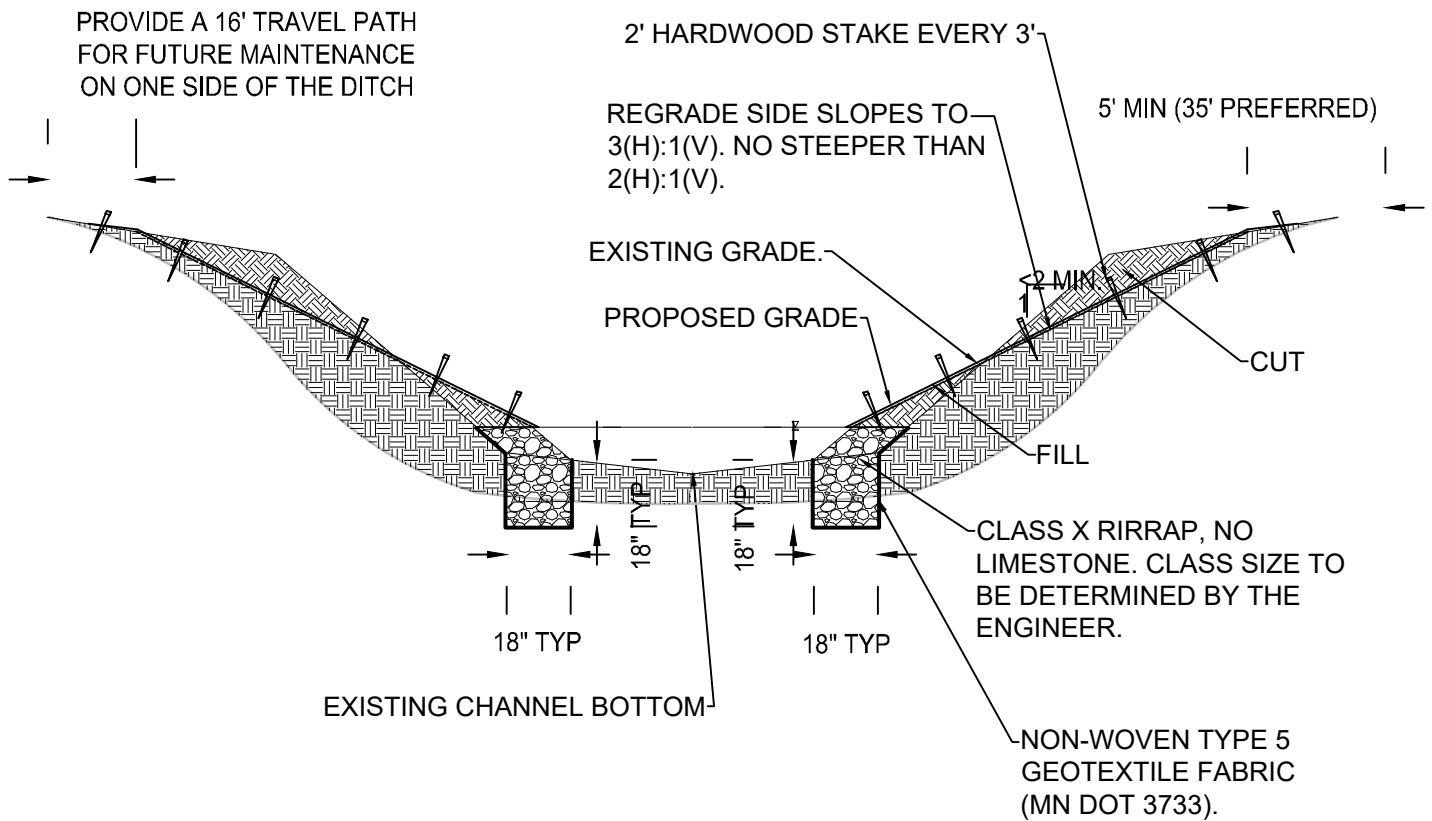

2025 Standard Detail Plates

DITCH STABILIZATION


LAST REVISION:
07/24/2024



PLATE NO.
STO-22


NOTES:

1. CLASS X RIPRAP FROM CULVERT INLET TO 5 TIMES THE PIPE DIAMETER UPSTREAM ON BOTH SIDES OF THE DITCH.
2. EXTEND RIPRAP FROM TOE OF SIDE SLOPE UP THE BANK TO $\frac{1}{2}$ PIPE HEIGHT OR EXISTING BENCH HEIGHT.

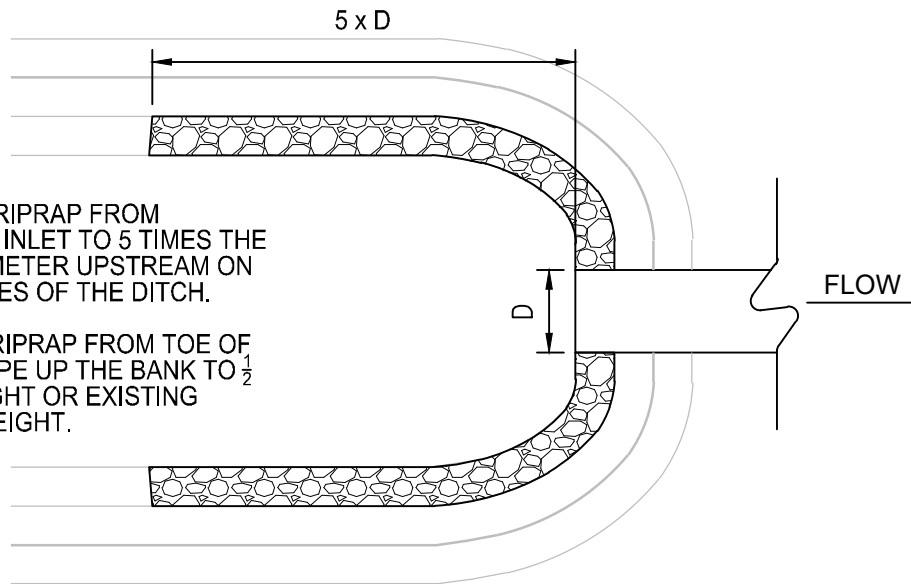

NOTES:

1. INSTALL ROCK GRADE CONTROL STRUCTURES EVERY 1' OF ELEVATION CHANGE ALONG THE DITCH PROFILE CENTER LINE. ROCK SIZE TO BE DETERMINED BY THE ENGINEER.

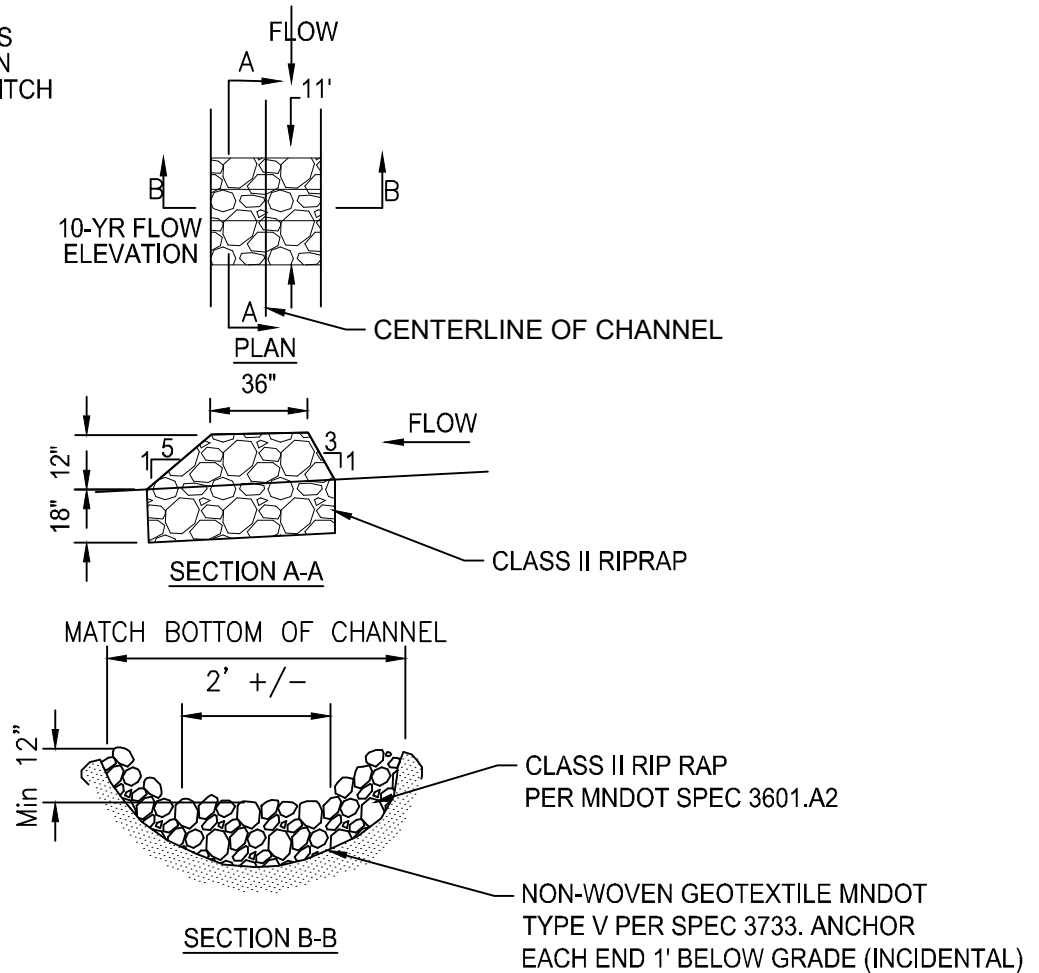


2025 Standard Detail Plates

RIPRAP AND GRADE CONTROL


LAST REVISION:
07/24/2024



PLATE NO.
STO-23

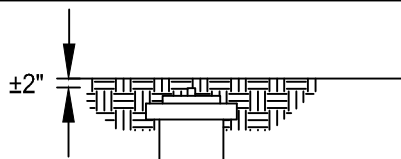


PVC CLEAN OUT
RISER WITH FEMALE
THREADED INSERT
SCHEDULE 40 PVC

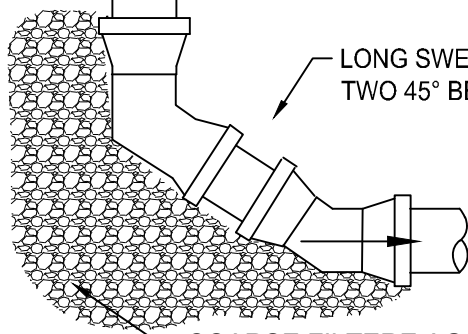

LONG SWEEP OR
TWO 45° BENDS


COARSE FILTER AGGREGATE
MIN 1/3 CU. YDS.

END OF LINE CLEANOUT



NOTES:
CLEANOUT CAP SHALL BE
THREADED MALLEABLE IRON
(GALVANIZED)
ENCLOSE LONG SWEEP BEND
OR COMBINATION WYE IN
CONCRETE AS SHOWN.

PVC COMBINATION WYE

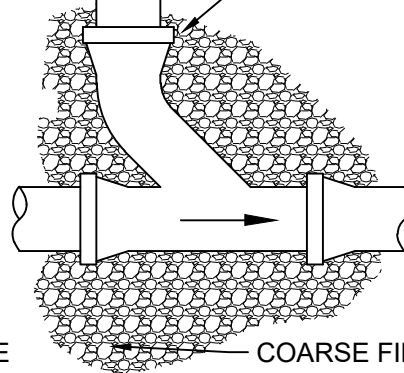

COARSE FILTER AGGREGATE
MIN 1/3 CU. YDS.


IN LINE CLEANOUT

REAR-YARD DRAIN TILE NOTES:


1. CLEANOUTS ARE REQUIRED AT A MAXIMUM 200 FOOT INTERVALS, AT BENDS, AND AT THE END OF THE RUN. IF CLEANOUT IS LOCATED WITHIN 50' OF CATCHBASIN TIE DRAINTILE INTO CATCHBASIN.
2. CLEANOUTS TO BE INSTALLED AT PROPERTY CORNERS.
3. ADDITIONAL CLEANOUTS TO BE INSTALLED AS DIRECTED BY ENGINEER

CURB STAMP FOR CLEANOUTS:

B612
B618
B624

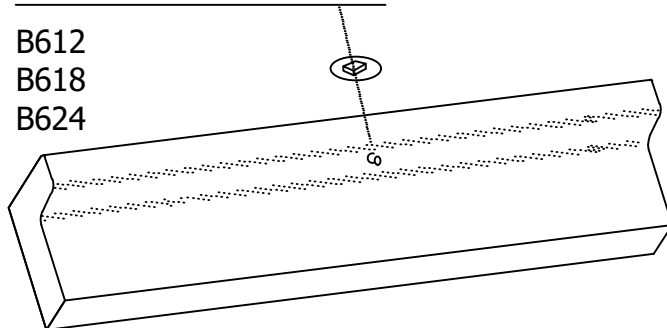


SURMOUNTABLE

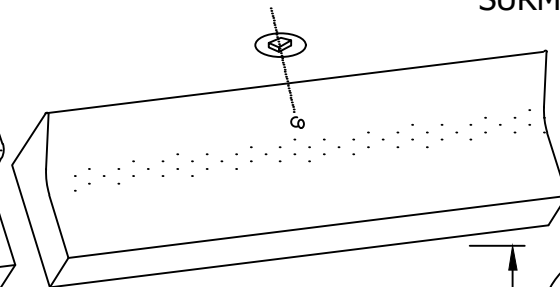

CO STAMP
DETAIL

STAMP "CO" IN FACE
AT CLEAN OUT
LOCATIONS




2025 Standard Detail Plates

PVC DRAINTILE CLEANOUTS

LAST REVISION:
07/24/2024



PLATE NO.
STO-24

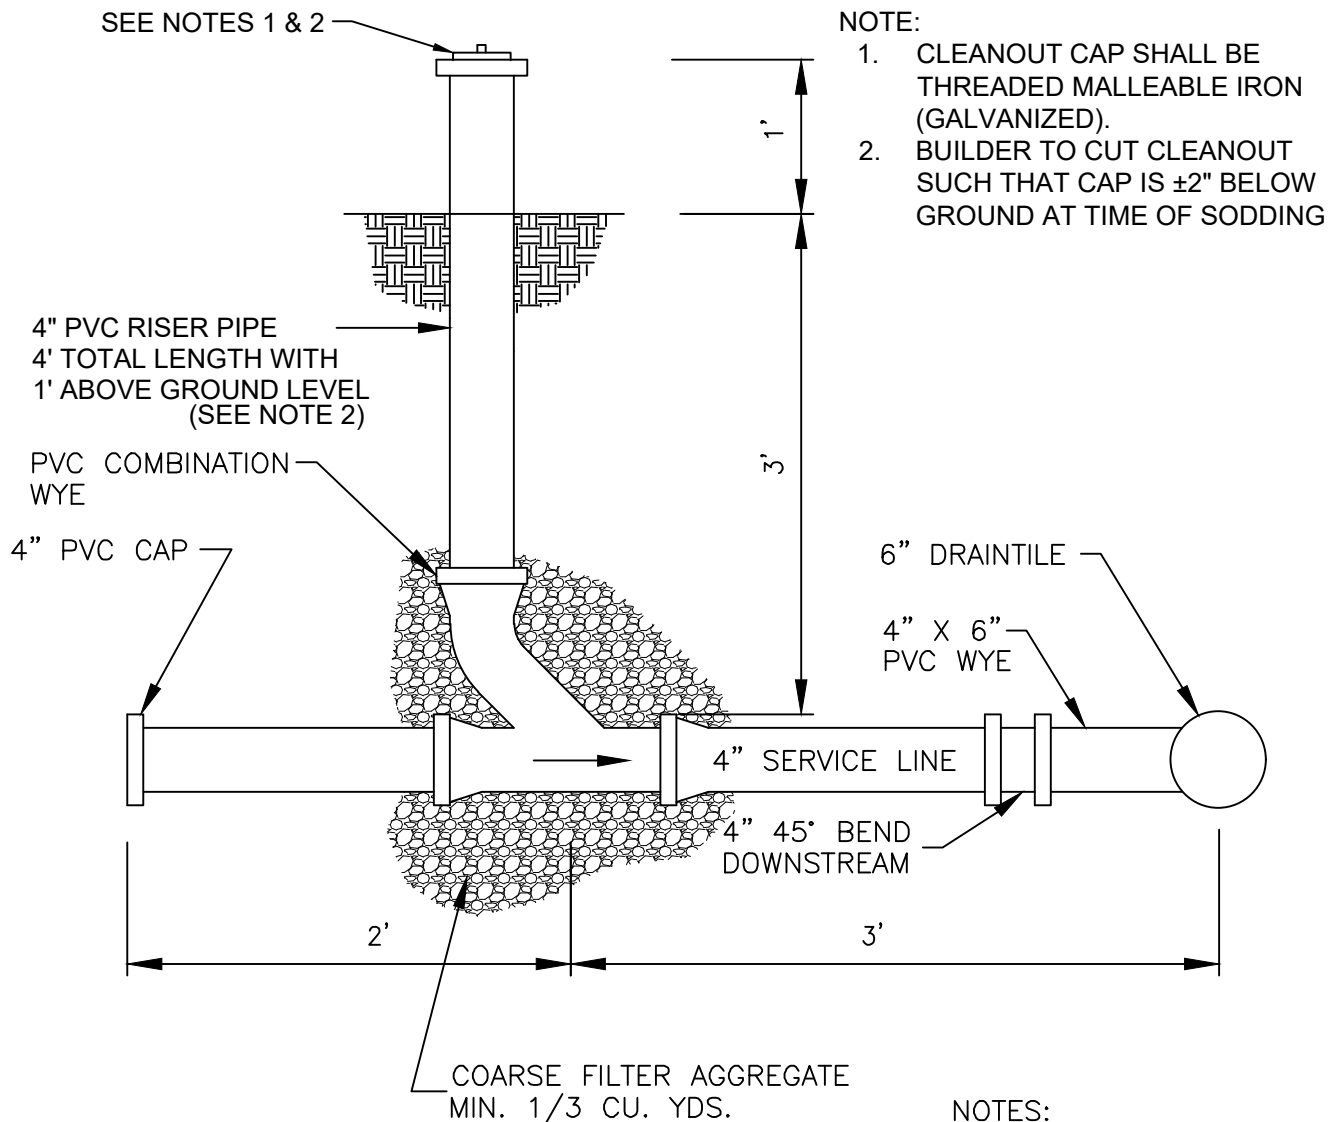

NOTES:

1. MIN COVER OF 3' TO TOP OF DRAINTILE FROM FINISH GRADE
2. DRAINAGE SWALES THAT HAVE LESS THAN 2% SLOPE SHALL USE DETAIL STR-4
3. MAINTAIN MINIMUM 2% SLOPE ON SERVICE PIPE TO MAIN.






2025 Standard Detail Plates

SUMP SERVICE CONNECTION

LAST REVISION:
01/02/2024



PLATE NO.
STO-23A

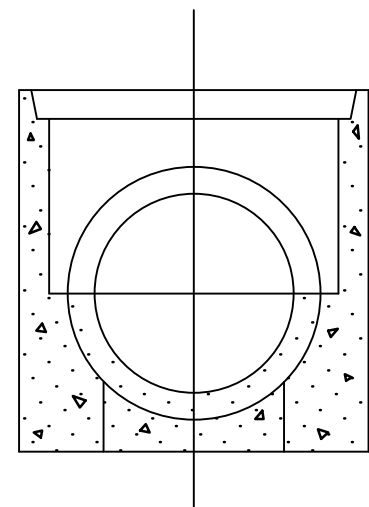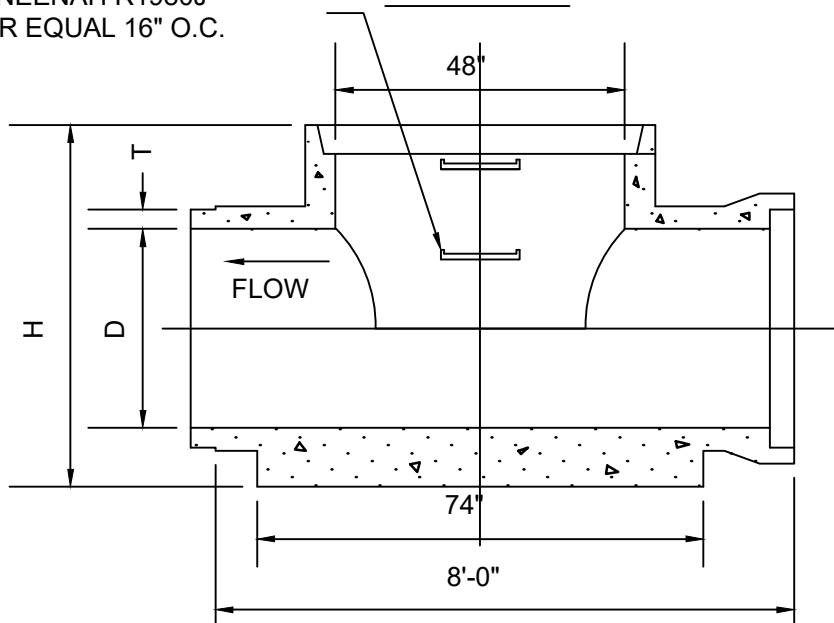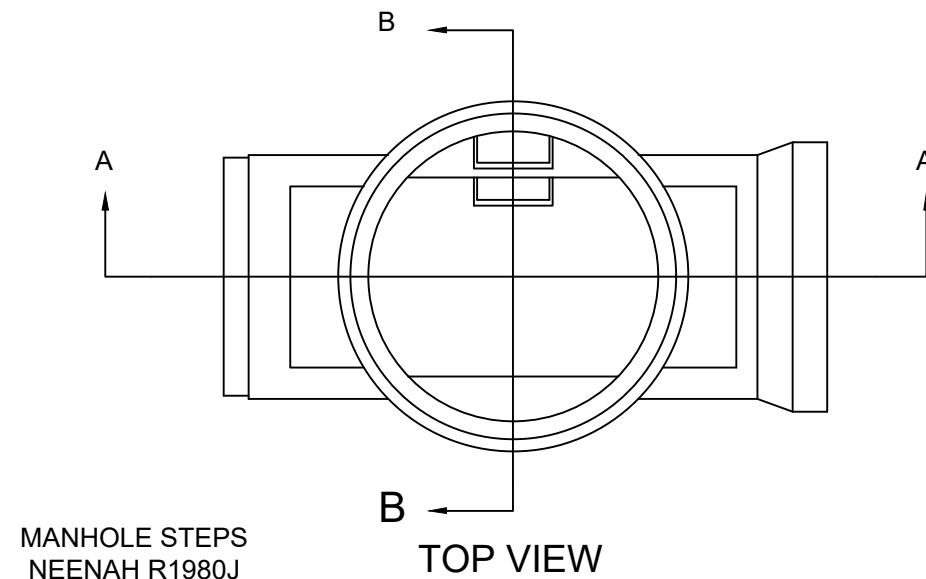

PIPE DIAMETER "D"	"B" WALL THICKNESS "T"	"C" WALL THICKNESS "T"	"B" WALL HEIGHT "H"
12"	2"	2 3/4"	36"
15"	2 3/4"	3"	36"
18"	2 1/2"	3 1/4"	48"
21"	2 3/4"	3 1/2"	48"
24"	3"	3 3/4"	48"
27"	3 1/4"	4"	60"
30"	3 1/2"	4 1/4"	60"
33"	3 3/4"	4 1/2"	60"
36"	4"	4 3/4"	60"

NOTE:

1. ALL PIPES SHALL HAVE R-4 RUBBER GASKET JOINT.
2. HORIZONTAL PIPE MAY BE "B" WALL OR "C" WALL.




2025 Standard Detail Plates

MINI-TEE MANHOLE

LAST REVISION:
07/24/2024



PLATE NO.
STO-25

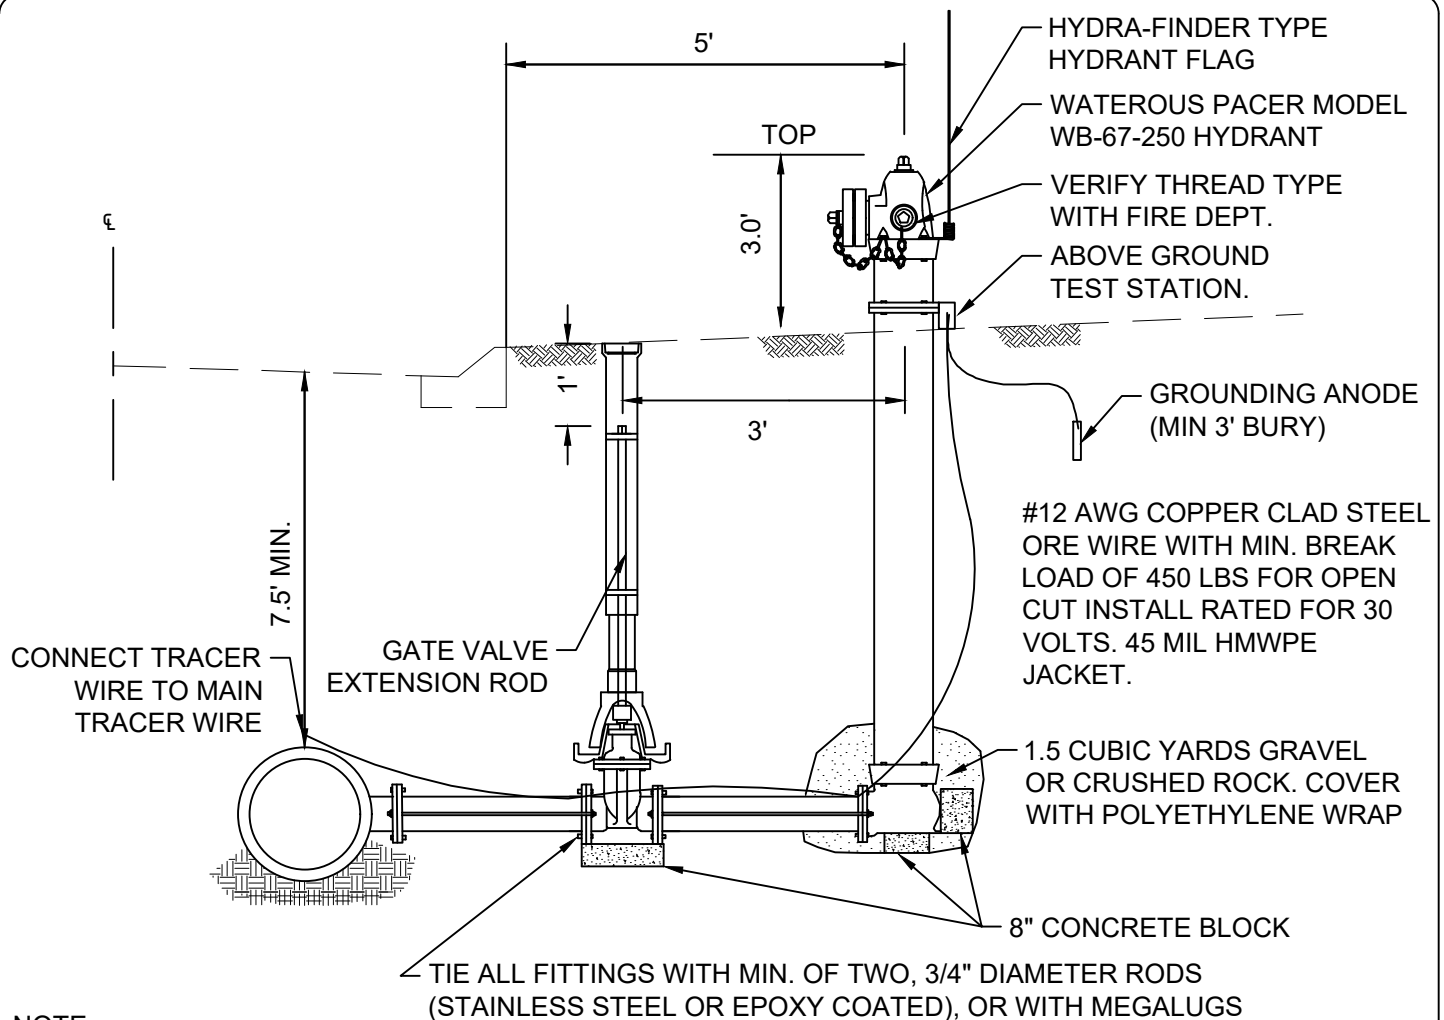

NOTE:

1. FACTORY INSTALLED PLUGS REQUIRED WHENEVER HYDRANTS ARE INSTALLED IN AREAS WITH HIGH GROUNDWATER LEVEL, AS DETERMINED BY DEWATERING REQUIREMENTS AND THE CITY ENGINEER. THE MAIN NOZZLE SHALL BE PAINTED BLUE FOR ALL HYDRANTS WITH PLUGGED DRAIN HOLES.
2. ALL DUCTILE IRON WATERMAIN FITTINGS SHALL BE FUSION BONDED EPOXY COATED.
3. HYDRANTS SHALL BE MARKED WITH STAINLESS STEEL TAG FROM FACTORY.
4. CONTRACTOR SHALL SUPPLY TWO HYDRANT FLAGS, ONE TO BE INSTALLED ON THE HYDRANT AND THE SECOND DELIVERED TO CORCORAN PUBLIC WORKS.
5. ALL HYDRANT LEADS ARE TO BE CONSTRUCTED WITH POLYWRAPPED DIP, CLASS 52.
6. PROVIDE TAPED POLYWRAP UP THE HYDRANT BARREL TO THE BREAK OFF FLANGE.
7. ALL WATERMAIN BOLTS SHALL BE COR-BLUE OR APPROVED EQUAL.
8. HYDRANTS SHALL BE PAINTED IN ACCORDANCE WITH THE FOLLOWING SCHEDULE: FLOW RATE OF 1,000 GPM OR MORE - GREEN; FLOW RATE BETWEEN 500 GPM AND 1,000 GPM - YELLOW; FLOW RATE OF 500 GPM OR LESS - RED.
9. ABOVE GROUND TEST STATION SHALL BE COBRA T3 (T2-R75) OR APPROVED EQUAL. OUTDOOR RATED PVC CONDUIT SHALL BE INSTALLED FROM BOTTOM OF TEST STATION TO 2' BELOW FINISH GRADE. SEE DETAIL WAT-11 FOR CONNECTION DETAILS.
10. MIN 1 LB. DRIVE IN ANODE WITH MIN. 20' WIRE LEAD.
11. CONNECTORS SHALL BE DRY CONN DIRECT BURY LUG AQUA, PRO-TRACE DB OR APPROVED EQUAL
12. CONTRACTOR SHALL SUPPLY 1 HYDRANT WRENCH FOR EVERY PHASE OR EVERY 5 HYDRANTS INSTALLED, WHICHEVER IS GREATER.




2025 Standard Detail Plates

WATER HYDRANT

LAST REVISION:
07/24/2024



PLATE NO.
WAT-1



DROP
LID
TYLER
MUELLER
BIBBY-STE-CROIX

No. 6860 No.
H-10361 No.
B-5160


ADJUST TOP TO 1/2" BELOW GRADE. BOX
TO BE SET TO PROVIDE 12" OF
ADJUSTMENT.

7.5' MINIMUM COVER REQUIRED OVER
TOP OF WATER MAIN.

GATE VALVE BOX COMPONENTS TO
BE WRAPPED IN POLYWRAP.

EXTENSIONS REQUIRED ON ALL
GATE VALVES

EXTENSION SHALL BE WITHIN 1-2'
OF FINISHED GRADE



TOP
TYLER
MUELLER
BIBBY-STE-CROIX

No. 6860 No.
H-10361 No.
VB502

26"
26"
27"

GRADE


TYLER NO. 6860 MUELLER NO.
H-10357 BIBBY-STE-CROIX B-5001
GATE VALVE BOX, SCREW TYPE, 3
PIECE, 5 1/4" SHAFT, SIZE G BOX,
7'-6" EXTENDED, #6 ROUND BASE

ALL GATE VALVES SHALL BE
MANUFACTURED IN THE U.S. OR
CANADA.

EXTENSION
TYLER

No. 58
No. 59
No. 60
No. 58
No. 59

14"
18"
24"
14"
20"



MUELLER


BIBBY-STE-CROIX

VB520 No. 57
VB521 No. 58
VB522 No. 59
VB523 No. 60

9"
14"
20"
26"

ALL VALVE BOX COMPONENTS
SHALL BE MANUFACTURED IN THE
U.S. OR CANADA, OR AS APPROVED
BY THE CITY ENGINEER.

RESILIENT WEDGE VALVE
CONFORMING AWWA C-509-80
STANDARDS INSTALLED WITH A VALVE
BOX ADAPTER TYPE II.



BOTTOM
TYLER

MUELLER
BIBBY-STE-CROIX

No. 6860 No.
H-10361 No.
VB516


65"
65"
60"

ADAPTOR REQUIRED ON ALL GATE
VALVES

GATE VALVE ADAPTOR 1/4" STEEL
WITH PROTECTIVE COATING

COPPER TRACER WIRE
INSTALLED ON ALL PVC
WATER MAIN

1/2" RUBBER GASKET INSTALLED
BETWEEN THE GATE VALVE AND
GATE VALVE ADAPTOR



BASE

8" CONCRETE BLOCK

MEGALUGS (TYP)

NOTE: ALL WATERMAIN BOLTS ARE TO BE
COR-BLUE OR AN APPROVED EQUAL

NOTE: GATE VALVES TO BE USED ON ALL
WATERMAIN 10" OR SMALLER.



2025 Standard Detail Plates

GATE VALVE AND BOX INSTALLATION

LAST REVISION:
07/24/2024



PLATE NO.
WAT-2


NOTE: ALL BUTTERFLY VALVES SHALL BE INDIVIDUALLY HYDROSTATICALLY TESTED AGAINST BOTH SIDES OF VALVE

COR-BLUE OR STAINLESS STEEL BOLTS REQUIRED FOR ALL MECHANICAL FITTINGS.


PROVIDE POLYWRAP AND TAPE AROUND ALL DIP WATERMAIN AND VALVE BOX.

7.5' MINIMUM COVER REQUIRED OVER TOP OF WATER MAIN.

RESTRAIN TEE AND VALVE WITH MEGALUG (OR EQUAL) THRUST RESTRAINTS.

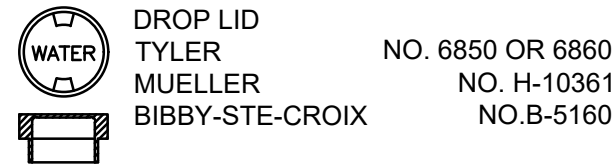

DROP LID
TYLER NO. 6850 OR 6860
MUELLER NO. H-10361
BIBBY-STE-CROIX NO. B-5160



TOP
TYLER NO. 6850
MUELLER NO. H-10361
BIBBY-STE-CROIX NO. VB502


GRADE

26"
26"
27"

ALL VALVES AND VALVE BOXES SHALL BE AMERICAN MADE. EXTENSION SHALL BE WITHIN 1-2' OF FINISHED GRADE

ALL VALVE BOLTS TO BE STAINLESS STEEL.

ADJUST TOP TO 1/2" BELOW GRADE. BOX TO BE SET TO PROVIDE 12" OF ADJUSTMENT.




EXTENSION
TYLER NO. 58 14"
NO. 59 18"
NO. 60 24"
MUELLER NO. 58 14"
NO. 59 20"
BIBBY-STE-CROIX
VB520 NO. 57 9"
VB521 NO. 58 14"
VB522 NO. 59 20"
VB523 NO. 60 26"

TYLER NO. 6850
MUELLER NO. H-10357
BIBBY-STE-CROIX B-5001
GATE VALVE BOX, SCREW TYPE, 3 PIECE, 5 1/4" SHAFT, SIZE G BOX, 7'-6" EXTENDED.

EXTENSIONS REQUIRED ON ALL BUTTERFLY VALVES
EXTENSION SHALL BE WITHIN 1-2' OF FINISHED GRADE


ADAPTOR REQUIRED ON ALL BUTTERFLY VALVES



BOTTOM
TYLER NO. 6850 65"
MUELLER NO. H-10361 65"
BIBBY-STE-CROIX NO. VB516 60"

BUTTERFLY VALVE FOR ALL WATERMAIN (12" OR LARGER) DEZURIK OR APPROVED EQUAL

BUTTERFLY VALVE ADAPTER

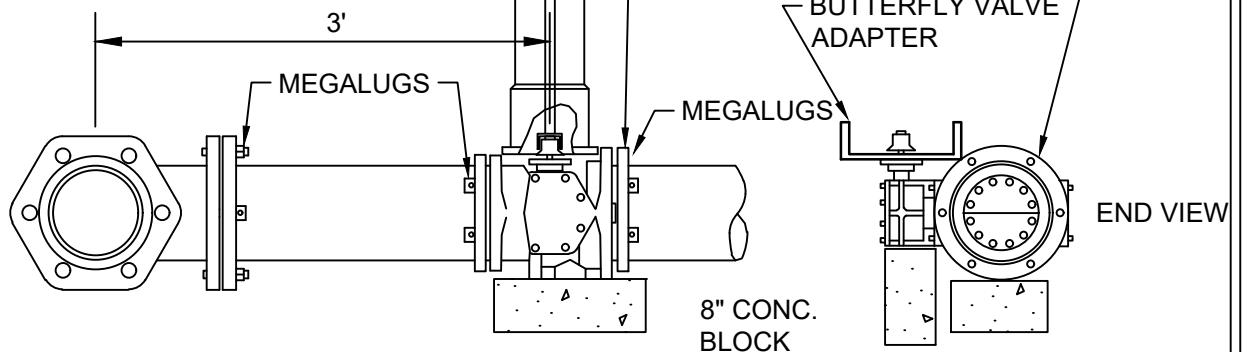


2025 Standard Detail Plates

BUTTERFLY VALVE AND BOX INSTALLATION

LAST REVISION:
07/24/2024



PLATE NO.
WAT-3

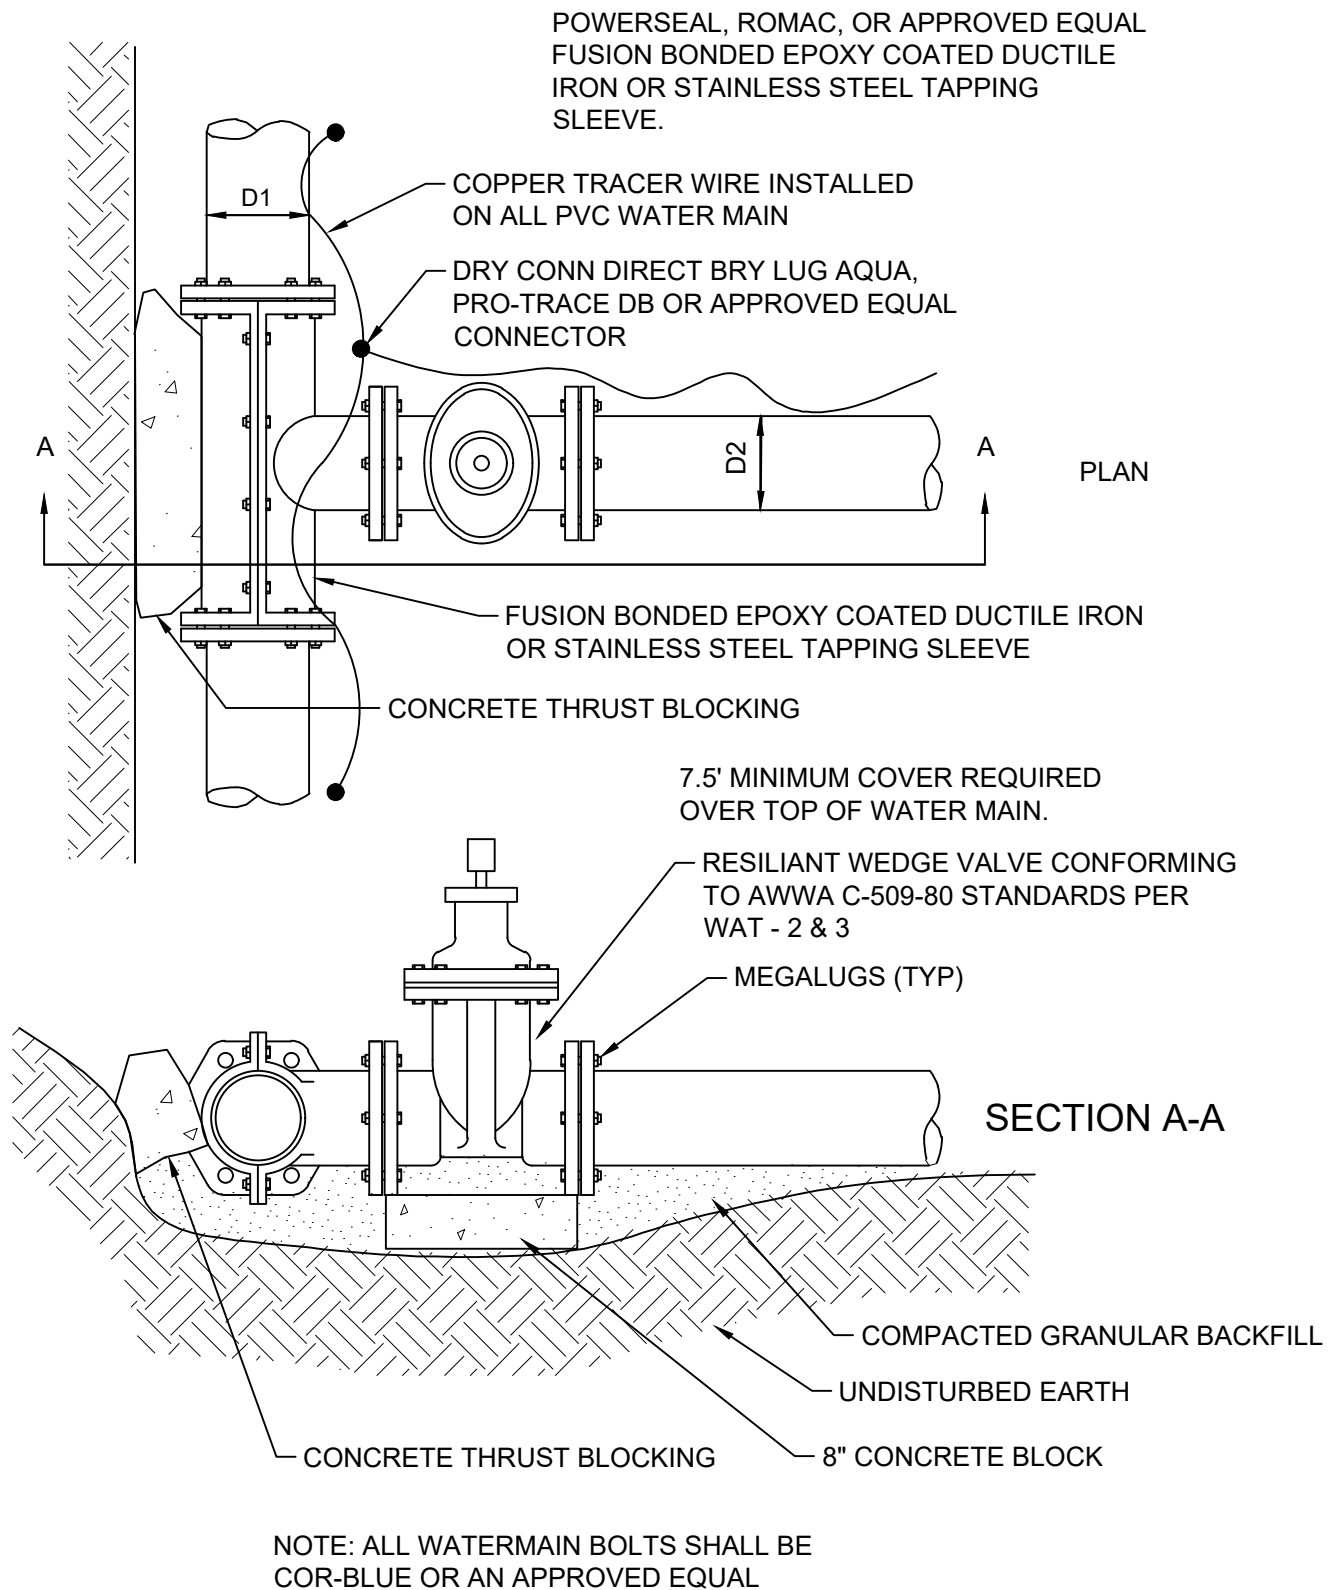

2025 Standard Detail Plates

WATERMAIN WET TAP


LAST REVISION:
07/24/2024



PLATE NO.
WAT-4

NOTES:

1. ALL NEW CURB BOXES MUST HAVE RISER RODS ADJUSTABLE FOR 8' OF COVER. WHEN AN EXISTING CURB BOX IS ON A CONSTRUCTION/RECONSTRUCTION PROJECT, RISER RODS SHALL BE INSTALLED TO ALL CURB BOXES ON THAT PROJECT. CURB STOPS MUST BE ABLE TO BE KEYED WITH 4' KEY.
2. PLACEMENT OF CURB STOP AND BOX ON PRIVATE STREETS SHALL BE 9' BEHIND THE PROPERTY LINE.
3. HDPE IS TO BE ONE PIECE, NO JOINTS, COUPLINGS, ETC., ALLOWED FROM MAIN TO CURB STOP.
4. WATER SERVICE AND SANITARY SEWER SERVICE SHALL HAVE A 3' HORIZONTAL SEPARATION.
5. CURB BOXES LOCATED IN DRIVEWAYS OR PARKING LOTS SHALL BE COVERED WITH A FORD A-1 METER BOX COVER.
6. METAL FENCE POST AT END OF WATER AND SANITARY SERVICE, 4' ABOVE GRADE WATER FENCE POST TO BE PAINTED BLUE. SANITARY FENCE POST TO BE PAINTED GREEN.
7. ALL PIPE SHALL BE BEDDED IN GRANULAR BORROW 3149.2B1.
8. TRACER WIRE SHALL BE BROUGHT UP ALONG WATERMAIN CURB STOP. INSTALL VALVCO, SNAKEPIT, OR APPROVE EQUAL TRAFFIC RATED TRACER WIRE ACCESS BOX WITH TWO LUGS.
9. MIN OF 1LB. DRIVE IN ANODES WITH MIN 20' WIRE LEAD ARE TO BE INSTALLED AT EVERY TRACE WIRE ACCESS BOX
10. TRACER WIRE SHALL BE 12AWG COPPER CLAD STEEL ORE WITH MIN BREAK LOAD OF 450 LB FOR OPEN CUT INSTALLATION RATED FOR 30 VOLTS. MIN 45 MIL HMWPE JACKET
11. TRACER WIRE CONNECTOR SHALL BE DRY CONN DIRECT BURY LUG AQUA, PRO-TRACE DB OR APPROVED EQUAL
12. COPPER WATER SERVICES TO BE USED ONLY FOR DEVELOPMENTS WITH PHASES CONSTRUCTED BEFORE 2024.

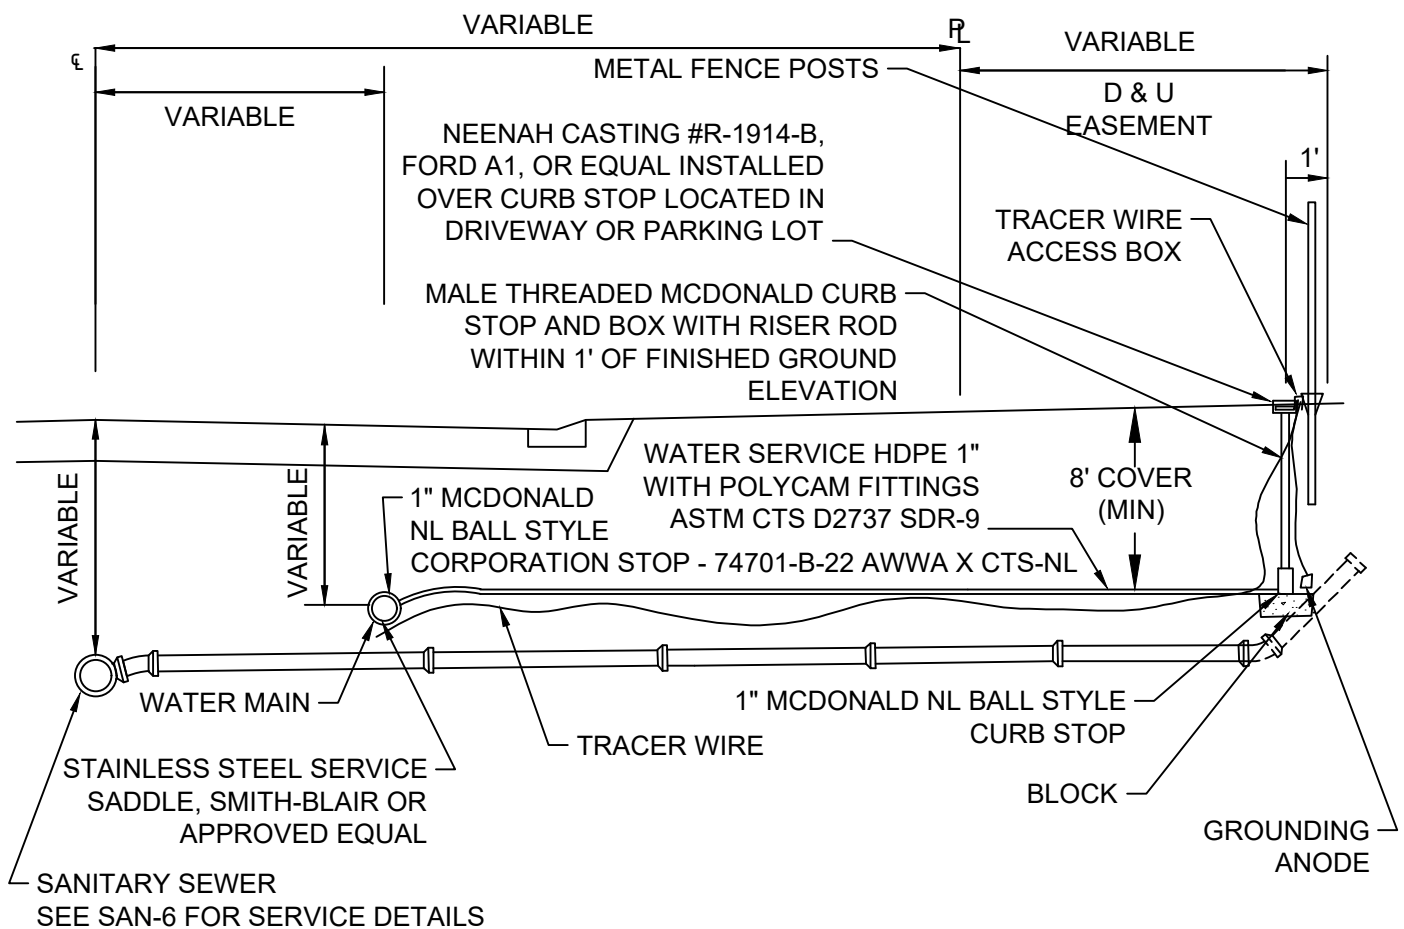

2025 Standard Detail Plates

COMPRESSION WATER SERVICE CONNECTION


LAST REVISION:
01/02/2025



PLATE NO.
WAT-5

NOTES:

1. ALL NEW CURB BOXES MUST HAVE RISER RODS ADJUSTABLE FOR 8' OF COVER. WHEN AN EXISTING CURB BOX IS ON A CONSTRUCTION/RECONSTRUCTION PROJECT, RISER RODS SHALL BE INSTALLED TO ALL CURB BOXES ON THAT PROJECT. CURB STOPS MUST BE ABLE TO BE KEYED WITH 4' KEY.
2. PLACEMENT OF CURB STOP AND BOX ON PRIVATE STREETS SHALL BE 9' BEHIND THE PROPERTY LINE WITH NO COPPER STUBBED PAST THE CURB STOP AND BOX.
3. COPPER IS TO BE ONE PIECE, NO JOINTS, COUPLINGS, ETC., ALLOWED FROM MAIN TO CURB STOP.
4. WATER SERVICE AND SANITARY SEWER SERVICE SHALL HAVE A 3' HORIZONTAL SEPARATION.
5. CURB BOXES LOCATED IN DRIVEWAYS OR PARKING LOTS SHALL BE COVERED WITH A FORD A-1 METER BOX COVER.
6. METAL FENCE POST AT END OF WATER AND SANITARY SERVICE, 4' ABOVE GRADE WATER FENCE POST TO BE PAINTED BLUE. SANITARY FENCE POST TO BE PAINTED GREEN.
7. ALL PIPE SHALL BE BEDDED IN GRANULAR BORROW 3149.2B1.
8. TRACER WIRE SHALL BE BROUGHT UP ALONG WATERMAIN CURB STOP. INSTALL VALVCO, SNAKEPIT, OR APPROVE EQUAL TRAFFIC RATED TRACER WIRE ACCESS BOX WITH TWO LUGS.
9. MIN OF 1LB. DRIVE IN ANODES WITH MIN 20' WIRE LEAD ARE TO BE INSTALLED AT EVERY TRACE WIRE ACCESS BOX
10. TRACER WIRE SHALL BE 12AWG COPPER CLAD STEEL ORE WITH MIN BREAK LOAD OF 450 LB FOR OPEN CUT INSTALLATION RATED FOR 30 VOLTS. MIN 45 MIL HMWPE JACKET
11. TRACER WIRE CONNECTOR SHALL BE DRY CONN DIRECT BURY LUG AQUA, PRO-TRACE DB OR APPROVED EQUAL
12. COPPER WATER SERVICES TO BE USED ONLY FOR DEVELOPMENTS WITH PHASES CONSTRUCTED BEFORE 2024.

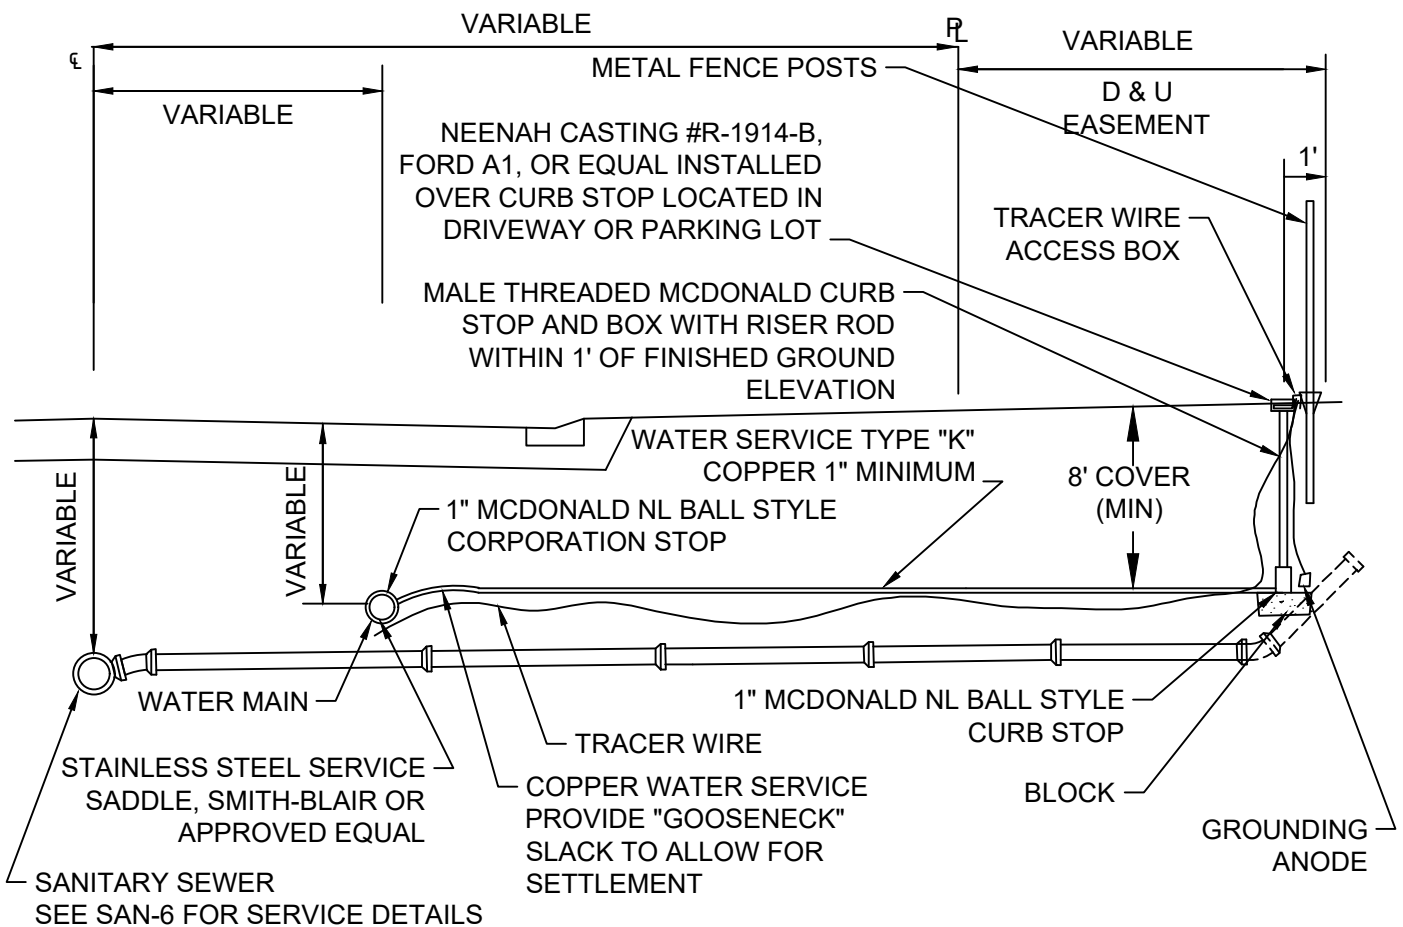

2025 Standard Detail Plates

COPPER WATER SERVICE CONNECTION

LAST REVISION:
01/02/2025



PLATE NO.
WAT-6

NOTES:

1. SHAPE OF BACK OF BUTTRESS MAY VARY AS LONG AS POURED AGAINST FIRM UNDISTURBED EARTH.
2. DIMENSION C1,C2,C3 SHOULD BE LARGE ENOUGH TO MAKE ANGLE Ø EQUAL TO OR LARGER THAN 90°.
3. DIMENSION A1,A2,A3 SHOULD BE AS LARGE AS POSSIBLE WITHOUT INTERFERING WITH MJ BOLTS.
4. ANGLE SHALL BE 90° MINIMUM.
5. PLACE POLYETHYLENE BETWEEN CONCRETE & PIPE.
6. MEGALUGS SHALL BE INSTALLED ON ALL BENDS.

BUTTRESS DIMENSIONS


PIPE SIZE	22 1/2° BEND		45° BEND		90° BEND	
	B ₁	D ₁	B ₂	D ₂	B ₃	D ₃
6"	1'-5"	1'-5"	1'-5"	1'-5"	2'-1"	1'-6"
8"	1'-5"	1'-5"	2'-1"	1'-6"	2'-8"	2'-0"
12"	1'-10"	1'-10"	3'-4"	2'-0"	4'-9"	2'-6"
16"	3'-0"	2'-0"	3'-10"	3'-0"	6'-2"	3'-6"
20"	3'-6"	2'-8"	5'-6"	3'-4"	8'-4"	4'-0"
24"	4'-4"	3'-0"	6'-10"	3'-10"	9'-8"	5'-0"
30"	-	-	9'-3"	6'-0"	17'-0"	6'-0"

ALL DUCTILE IRON FITTINGS TO BE FUSION BONDED EPOXY COATED.

ALL DUCTILE IRON PIPE AND FITTINGS TO BE WRAPPED IN POLY AND TAPED.


ALL DUCTILE IRON PIPES AND FITTINGS TO BE MANUFACTURED IN US OR CANADA, OR AS APPROVED BY THE CITY ENGINEER.

SEE NOTE 4

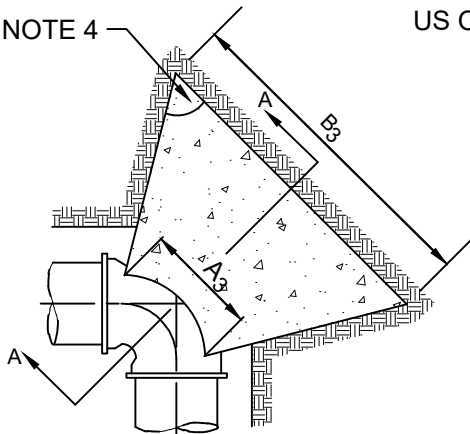


PLAN 90° BENDS

SEE NOTE 4

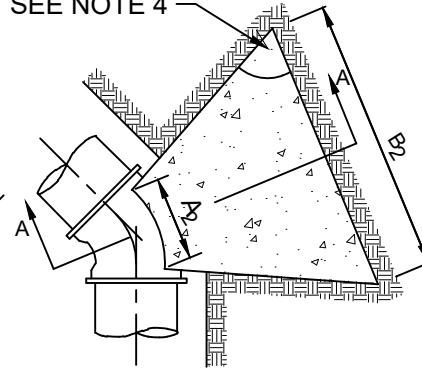


PLAN 45° BENDS

SEE NOTE 4

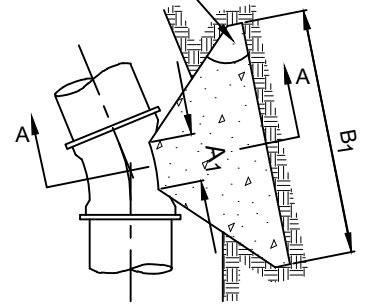


PLAN 22 1/2° BENDS

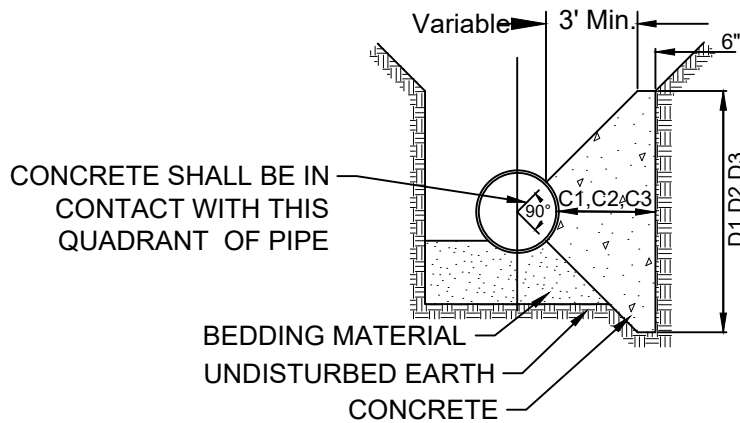

SECTION A-A

SEE NOTE 4

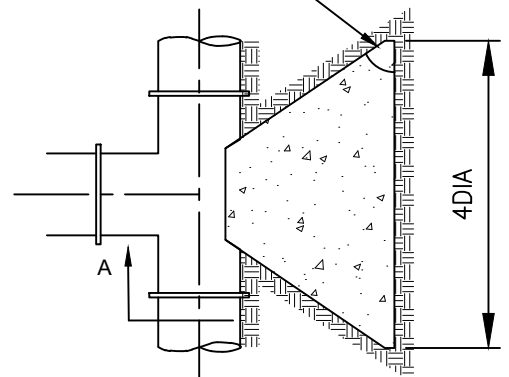

PLAN 3 WAY TEES

NOTE: ALL WATERMAIN BOLTS SHALL BE COR-BLUE OR APPROVED EQUAL




2025 Standard Detail Plates

CONCRETE THRUST BLOCKING

LAST REVISION:
07/24/2024



PLATE NO.
WAT-7

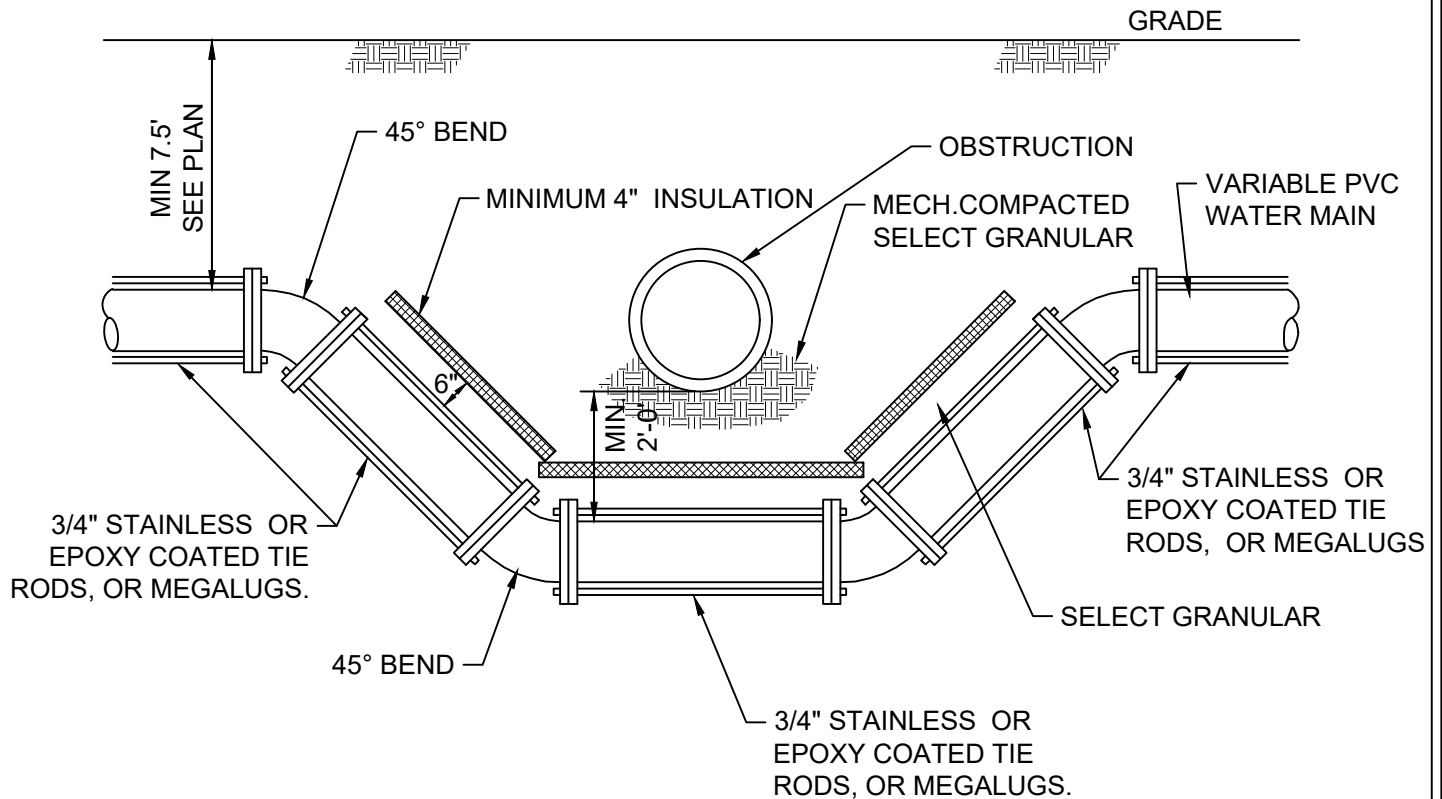

NOTE:

1. ALL FITTINGS SHALL BE FUSION BONDED EPOXY COATED DUCTILE IRON TO MEET OR EXCEED ANSI/AWWA C550 AND C116/A21.116 REQUIREMENTS.
2. MEGALUGS, IF USED SHALL BE SNUG FIT ON CIP WATER MAIN AND BOLTS SHALL NOT BE "SNAPPED" TIGHT.
3. SELECT GRANULAR WILL BE REQUIRED BETWEEN INSULATION, WATER MAIN, AND OBSTRUCTION.
4. ALL BENDS SHALL HAVE MEGALUGS OR TIE RODS WITH BLOCKING IN ACCORDANCE WITH STANDARD PLATE WAT-5.
5. COPPER TRACER WIRE SHALL BE USED ON PVC WATERMAIN.
6. ALL WATERMAIN BOLTS SHALL BE COR-BLUE OR APPROVED EQUAL.
7. INSULATION AND BACKFILL REQUIREMENTS SHALL APPLY TO ALL CROSSINGS WITH MINIMAL SEPARATION. IF LESS THAN 2' OF SEPARATION IS PRESENT, ADDITIONAL INSULATION WILL BE REQUIRED BY AT THE DISCRETION OF THE CITY ENGINEER.




2025 Standard Detail Plates

WATERMAIN OFFSETS

LAST REVISION:
01/02/2025



PLATE NO.
WAT-8

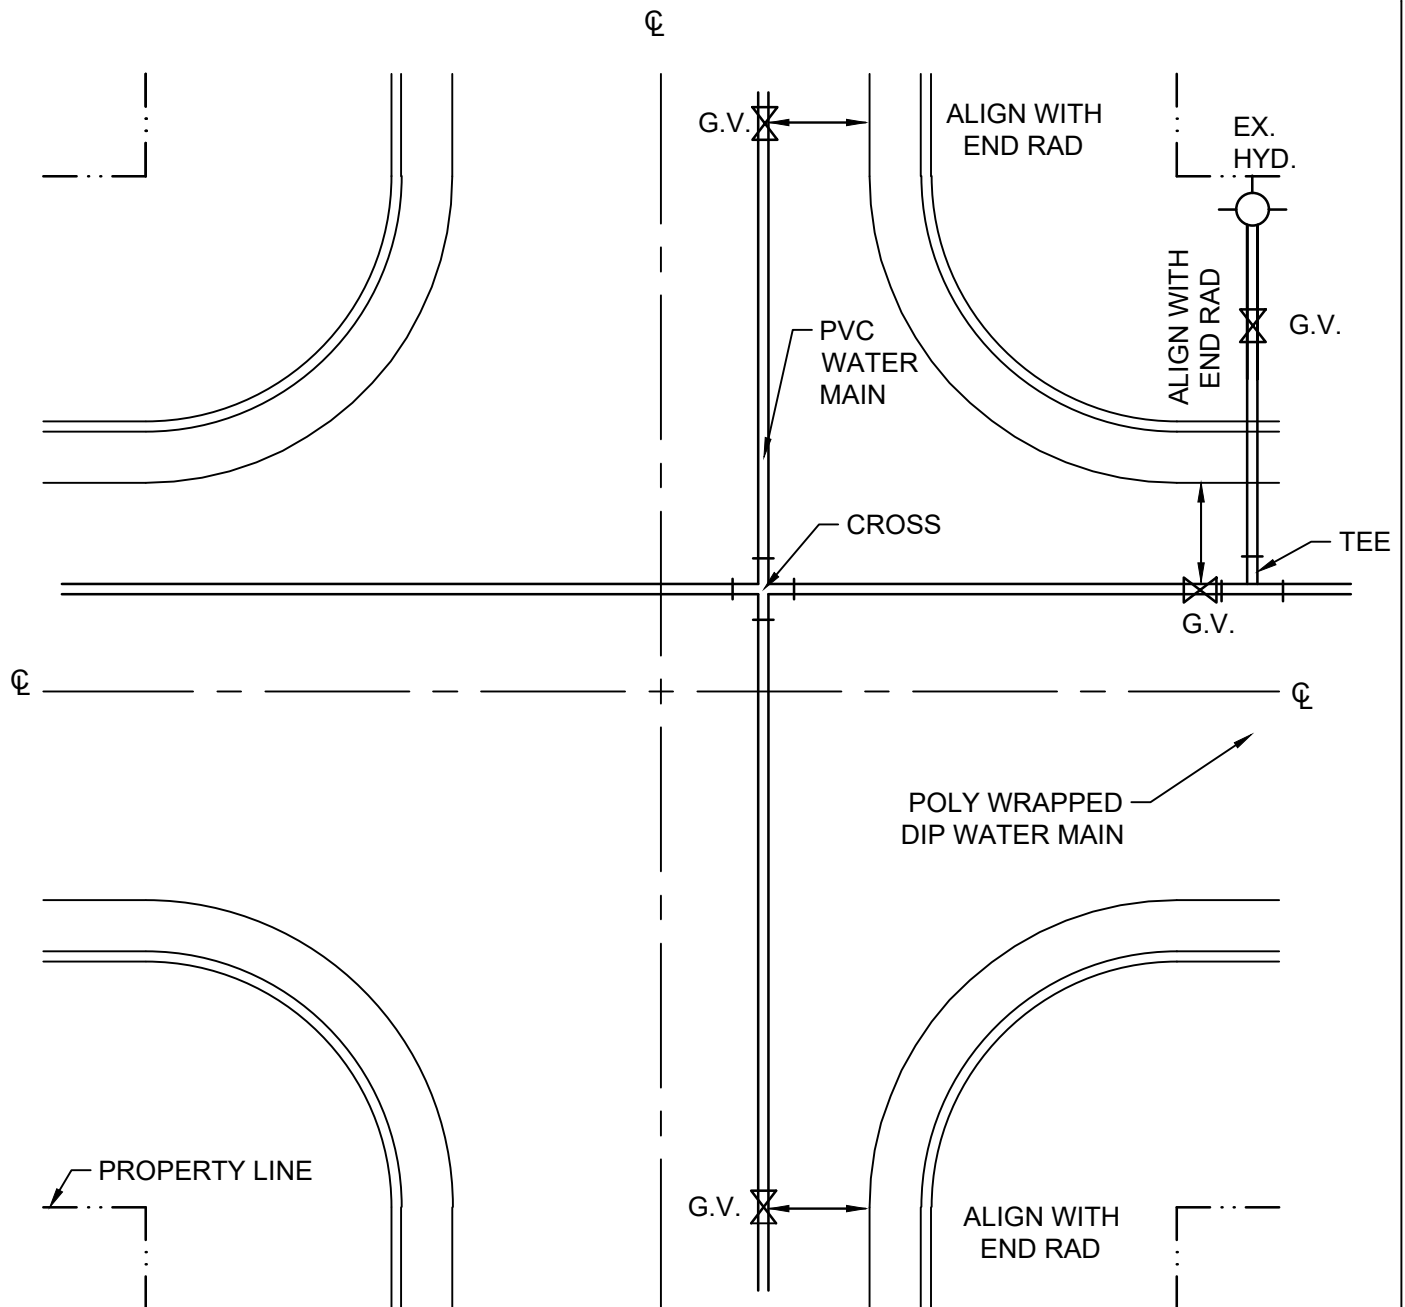

NOTE:

1. SEE DETAIL PLATE WAT-1 FOR TYPICAL HYDRANT AND GATE VALVE LAYOUT.
2. SEE DETAIL PLATE WAT-5 FOR TYPICAL WATER SERVICE CONNECTION.
3. ALL WATERMAIN SHALL BE PLACED NORTH AND EAST OF THE CENTER LINE OF ROAD.
4. ALL DUCTILE IRON WATERMAIN FITTINGS SHALL BE FUSION BONDED EPOXY COATED.
10. ALL PVC WATERMAIN SHALL HAVE A COPPER TRACER WIRE. TRACER WIRE SHALL BE 12AWG COPPER CLAD STEEL OR WITH MIN BREAK LOAD OF 450 LB FOR OPEN CUT INSTALLATION RATED FOR 30 VOLTS. MIN 45 MIL HMWPE JACKET
11. ALL VALVES TO BE PLACED 3' FROM TEES, CROSSES, OR HYDRANTS.
12. CITY MAY ADD ADDITIONAL VALVES IN LOCATIONS WHERE EXISTING VALVES ARE SPACED TOO FAR APART.




2025 Standard Detail Plates

TYPICAL GATE VALVE LAYOUT

LAST REVISION:
01/02/2025



PLATE NO.
WAT-9

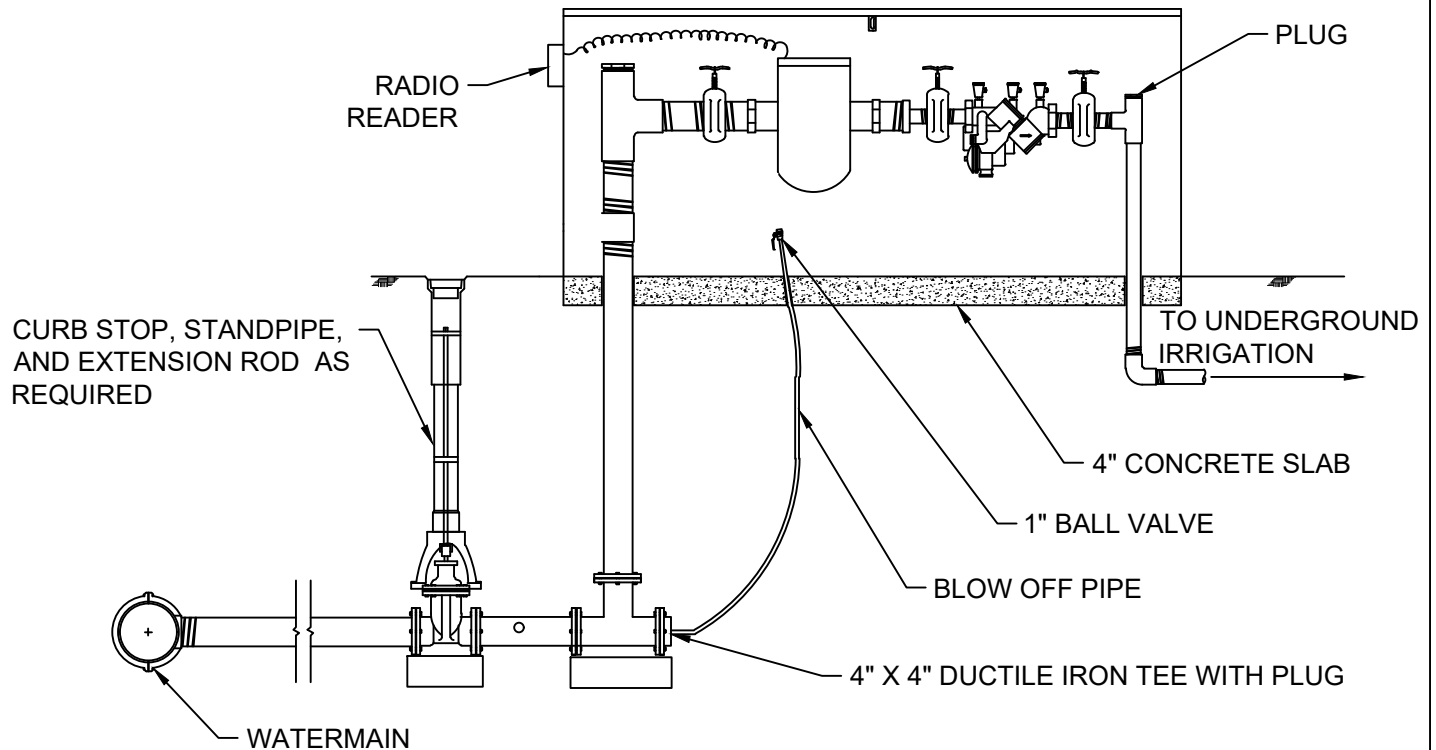

NOTE:

1. TO WINTERIZE, REMOVE AND DRAIN METER, SIPHON WATER FROM FEED LINE, BLOW OUT IRRIGATION LINES AND REINSTALL METER.
2. SECURITY BOX MUST BE MAINTENANCE FREE VANDELPROOF ENCLOSURE, WITH HINGED TOP.
3. IRRIGATION CONNECTION TO BE CONFIGURED FOR MAXIMUM 2" WATER METER.




2025 Standard Detail Plates

**IRRIGATION SYSTEM TAP, METER,
AND BACKFLOW PREVENTOR
ASSEMBLY**

LAST REVISION:
01/02/2024



PLATE NO.
WAT-10

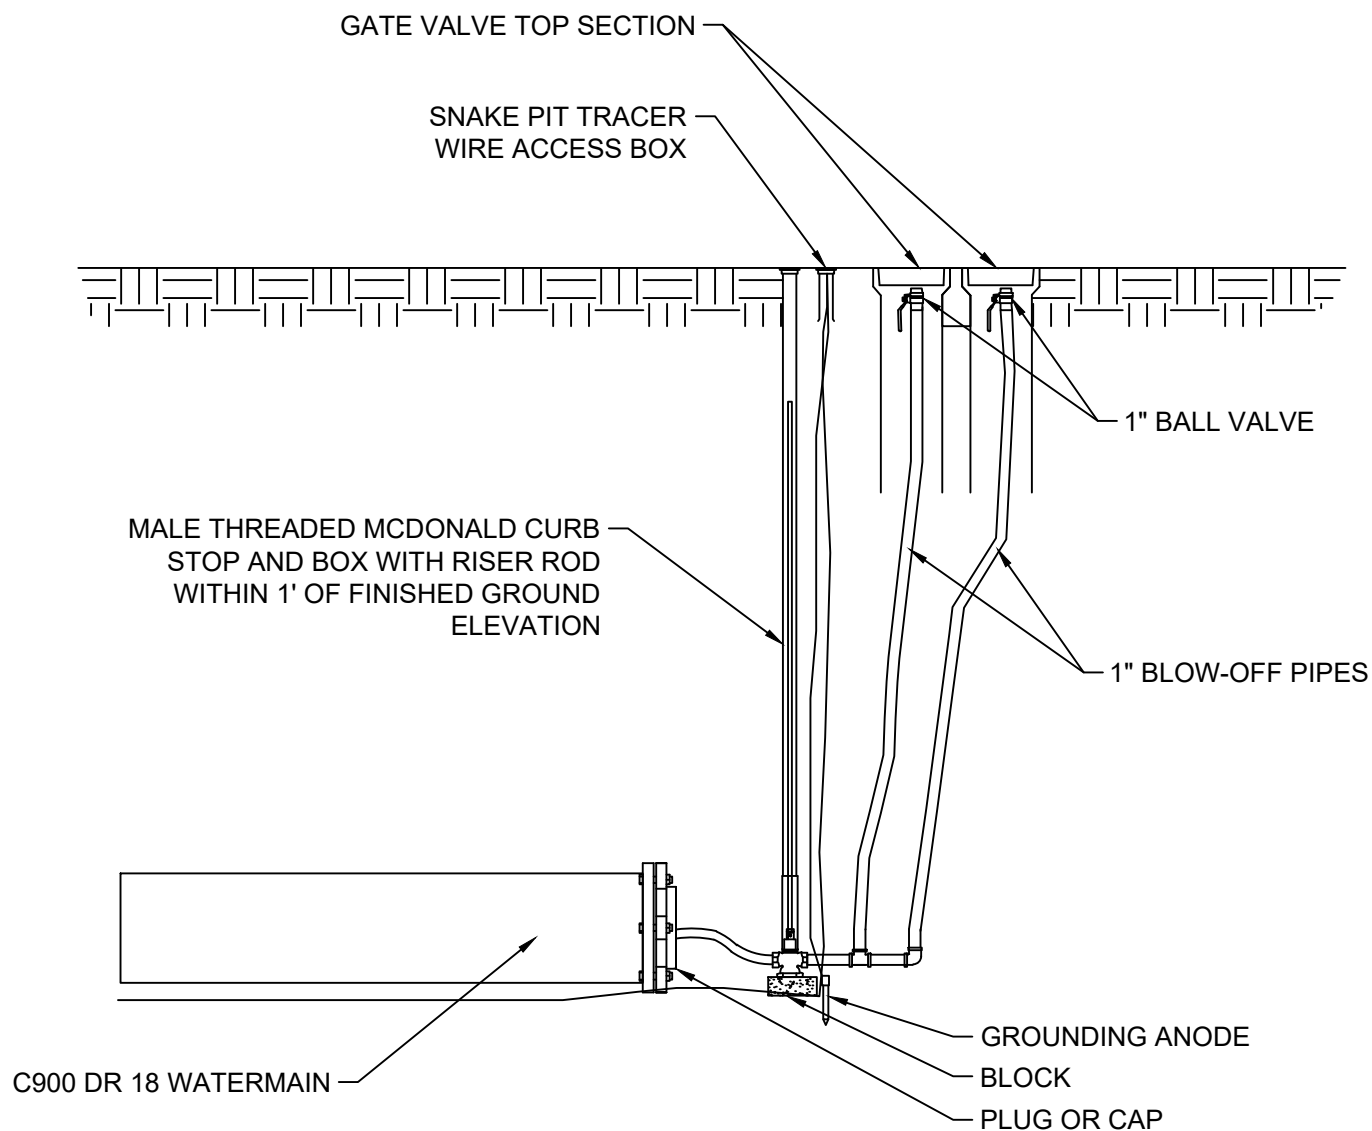

NOTE: 1" PIPE AND FITTINGS TO BE COPPER FOR DEVELOPMENTS IN WHICH COPPER HAS BEEN PREVIOUSLY INSTALLED. HDPE FOR ALL OTHER PROJECTS AND NEW DEVELOPMENTS.



2025 Standard Detail Plates


PLUG OR CAP WITH BLOWOFF

LAST REVISION:
01/02/2025



PLATE NO.

WAT-11

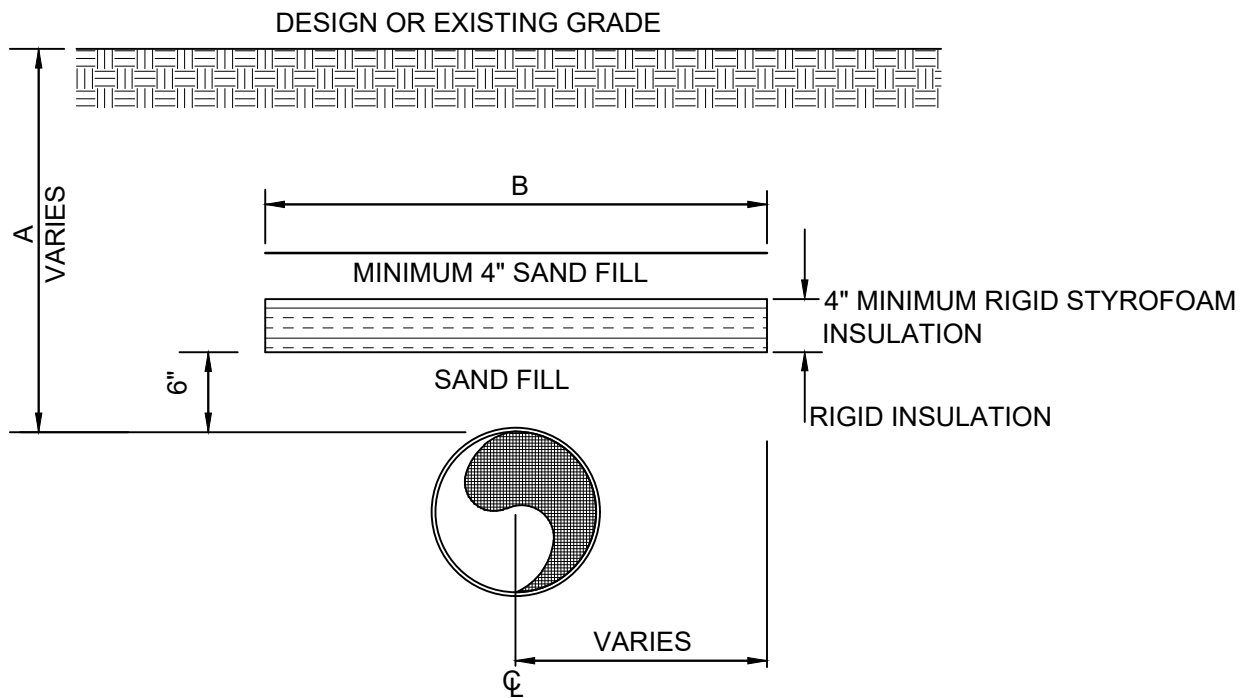

NOTE:

1. REFERENCE WAT-7 FOR INSULATION AND BACKFILL REQUIREMENTS FOR PIPE CROSSINGS.
2. PIPE SHALL BE CENTERED UNDER INSULATION UNLESS OTHERWISE SPECIFIED.

COVER OVER PIPE - A

5'
6'

WIDTH OF INSULATING BOARD - B

8'
4'




2025 Standard Detail Plates

WATER MAIN INSULATION

LAST REVISION:
01/02/2024



PLATE NO.
WAT-12

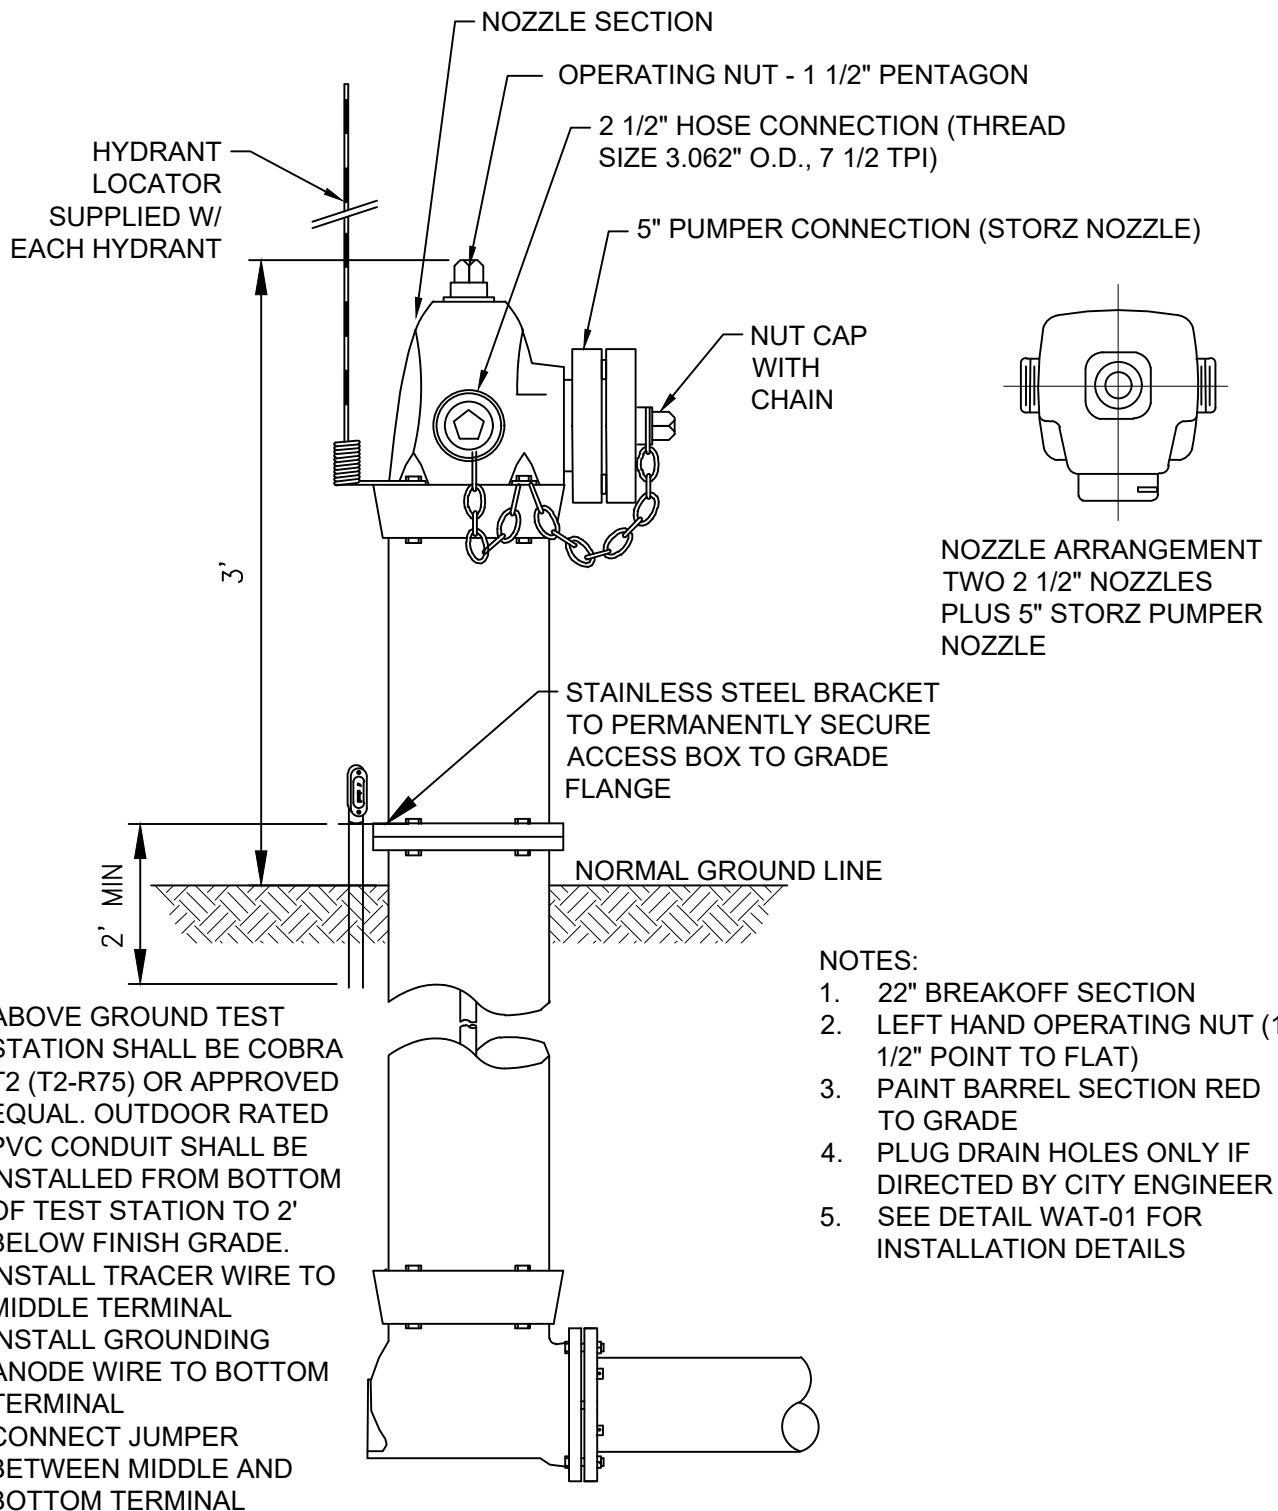

NOTE: HYDRANT SHALL BE PACER MODEL WB67-250




2025 Standard Detail Plates

PACER HYDRANT DETAIL

LAST REVISION:
07/24/2024



PLATE NO.
WAT-13

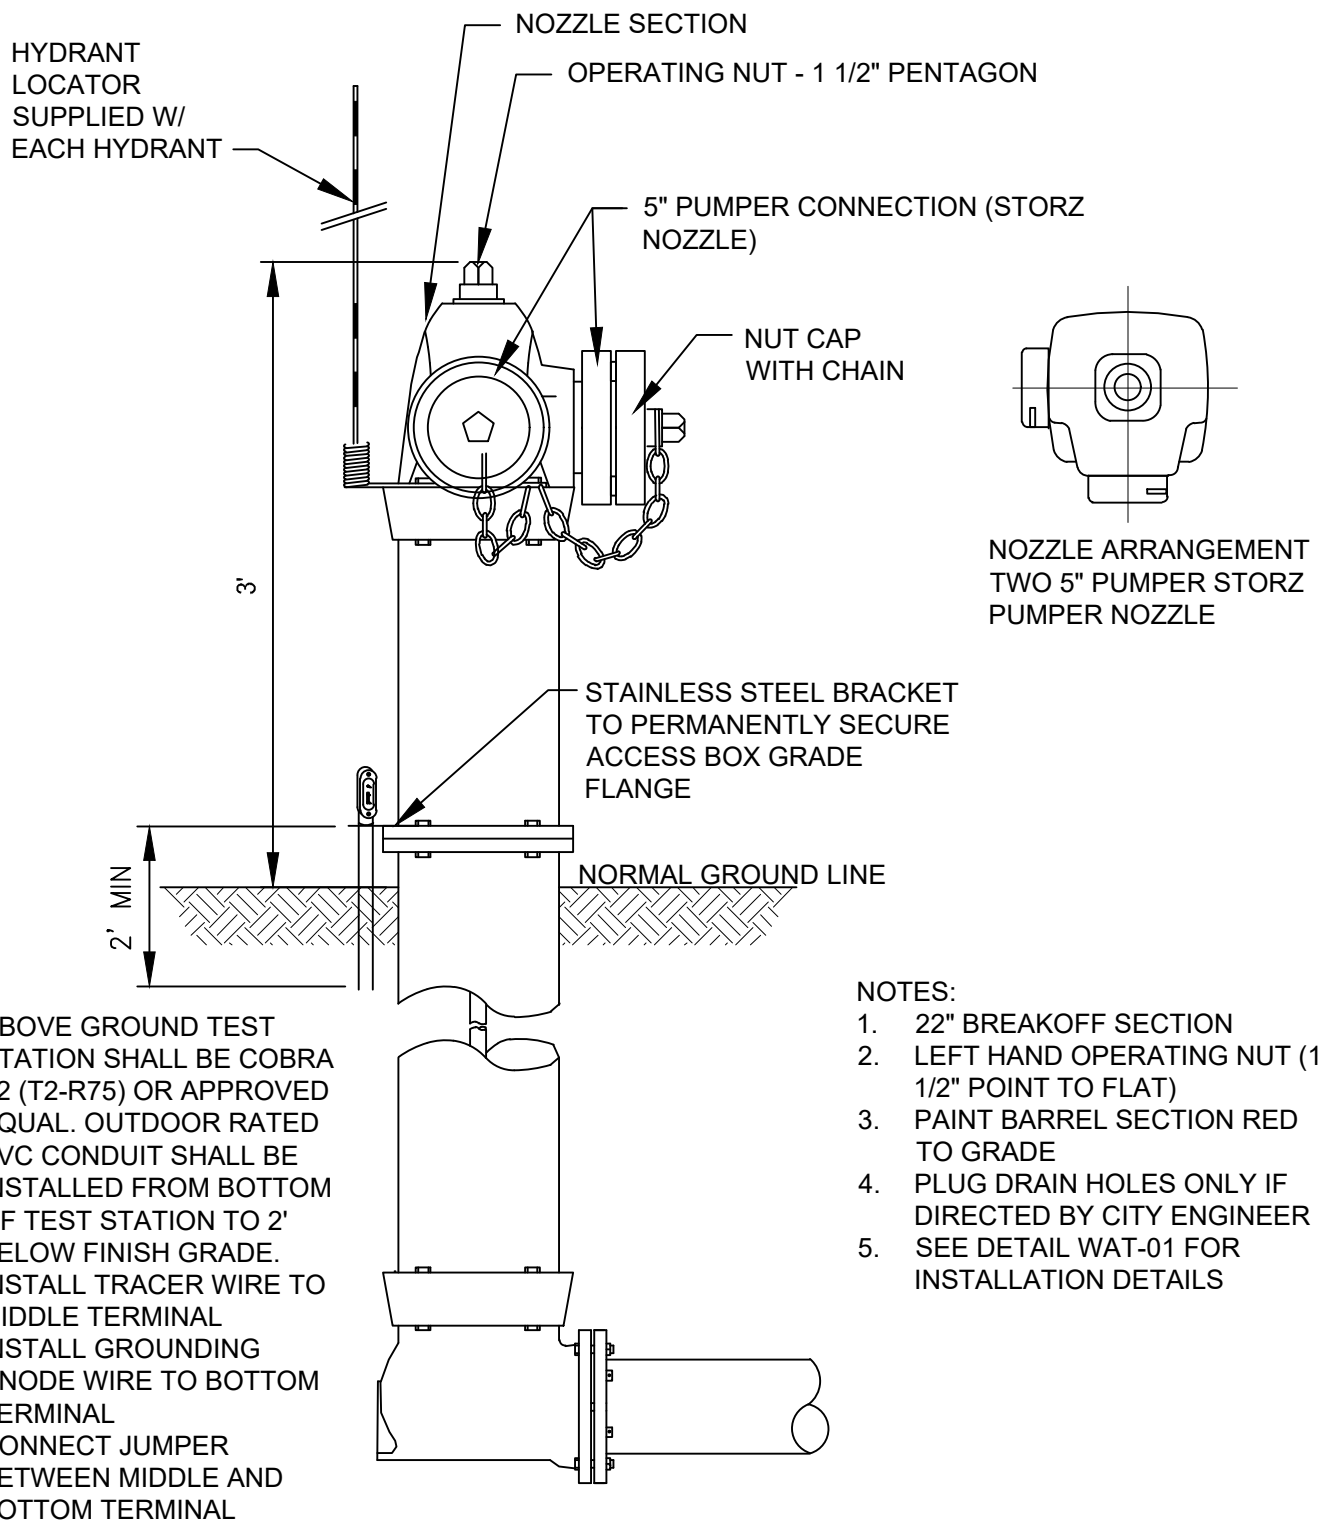

2025 Standard Detail Plates


DOUBLE PUMPER HYDRANT DETAIL

LAST REVISION:
07/24/2024



PLATE NO.

WAT-14

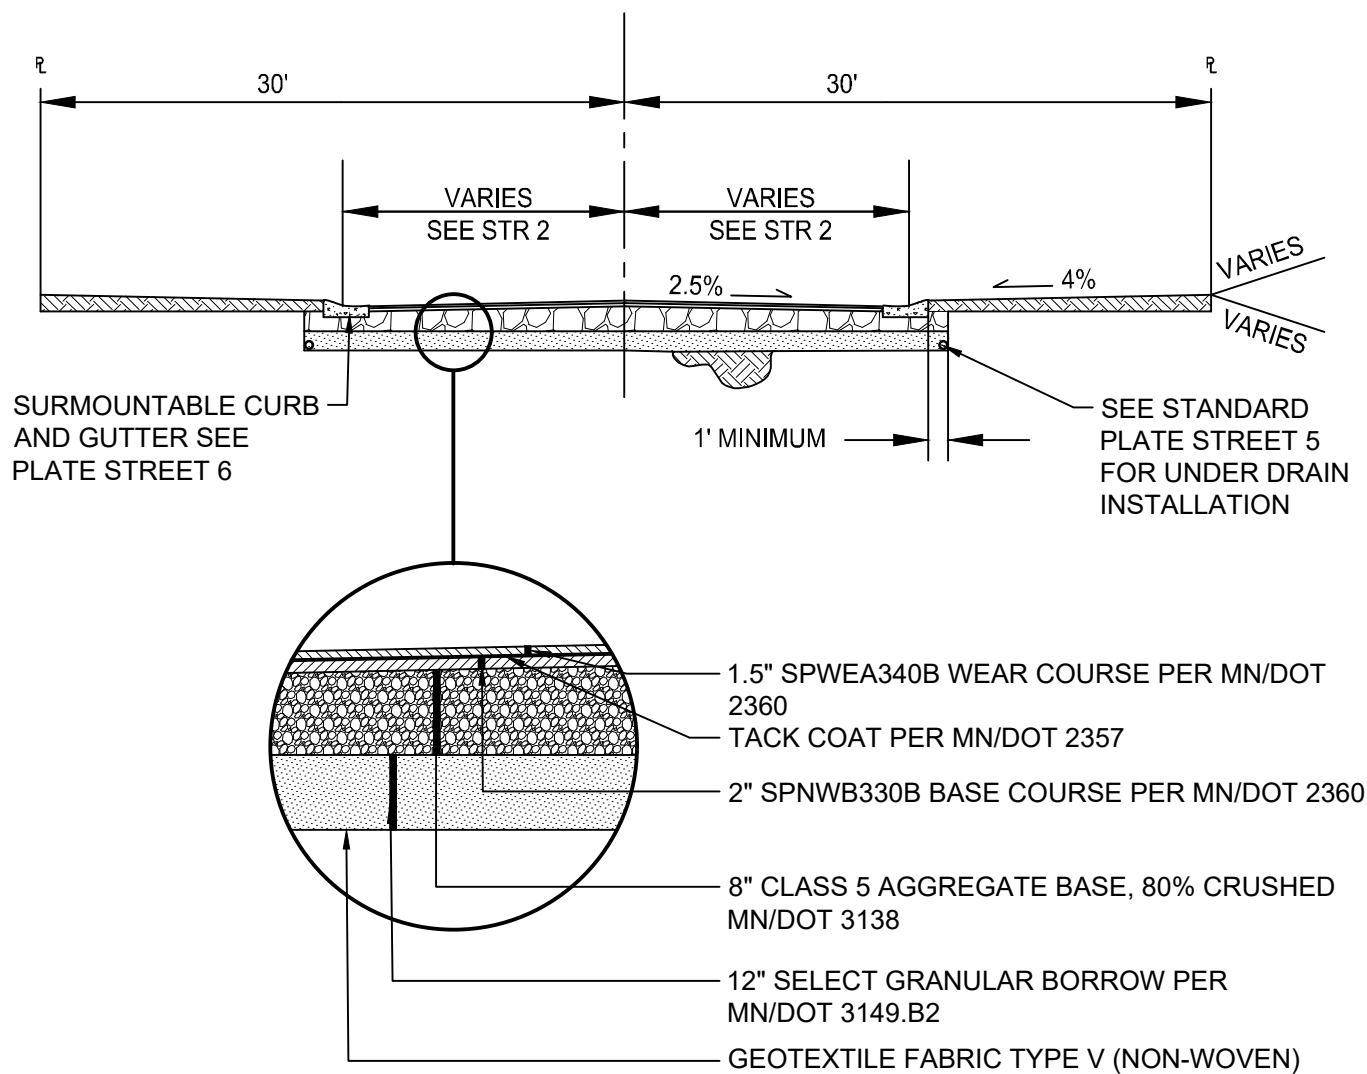

NOTES:

1. TYPICAL SECTION SHOWN IS THE MINIMUM RESIDENTIAL STREET REQUIREMENT. SEE SPECIFICATIONS FOR PROJECT SPECIFIC DETAILS.
2. DRAINTILE SHALL BE INSTALLED BEHIND CURB. DRAINTILE TO BE INSTALLED AS REQUIRED TO ADEQUATELY DRAIN ALL SELECT GRANULAR FILL AREAS.
3. STREET SHALL BE DESIGNED WITH MINIMUM 0.60% AND MAXIMUM 6.00% GRADE.
4. THE CITY RESERVES THE RIGHT TO INCREASE THE STREET SECTION BASED ON SOIL CONDITIONS.
5. TACK COAT PER MN/DOT 2357 TO BE USED ON CURB PRIOR TO PLACEMENT OF BITUMINOUS
6. REFER TO THE HENNEPIN COUNTY BICYCLE TRANSPORTATION PLAN FOR TRAIL DETAILS.
4. WEARING COURSES MAY HAVE A MAXIMUM OF 10% RECYCLED ASPHALT PAVEMENT (RAP). NO RECYCLED ASPHALT SHINGLES (RAS) ALLOWED IN WEARING COURSES.
5. NON-WEARING COURSES MAY HAVE A MAXIMUM OF 20% RECYCLED ASPHALT PAVEMENT (RAP).




2025 Standard Detail Plates

RESIDENTIAL STREET SECTION

LAST REVISION:
01/02/2025



PLATE NO.
STR-1A

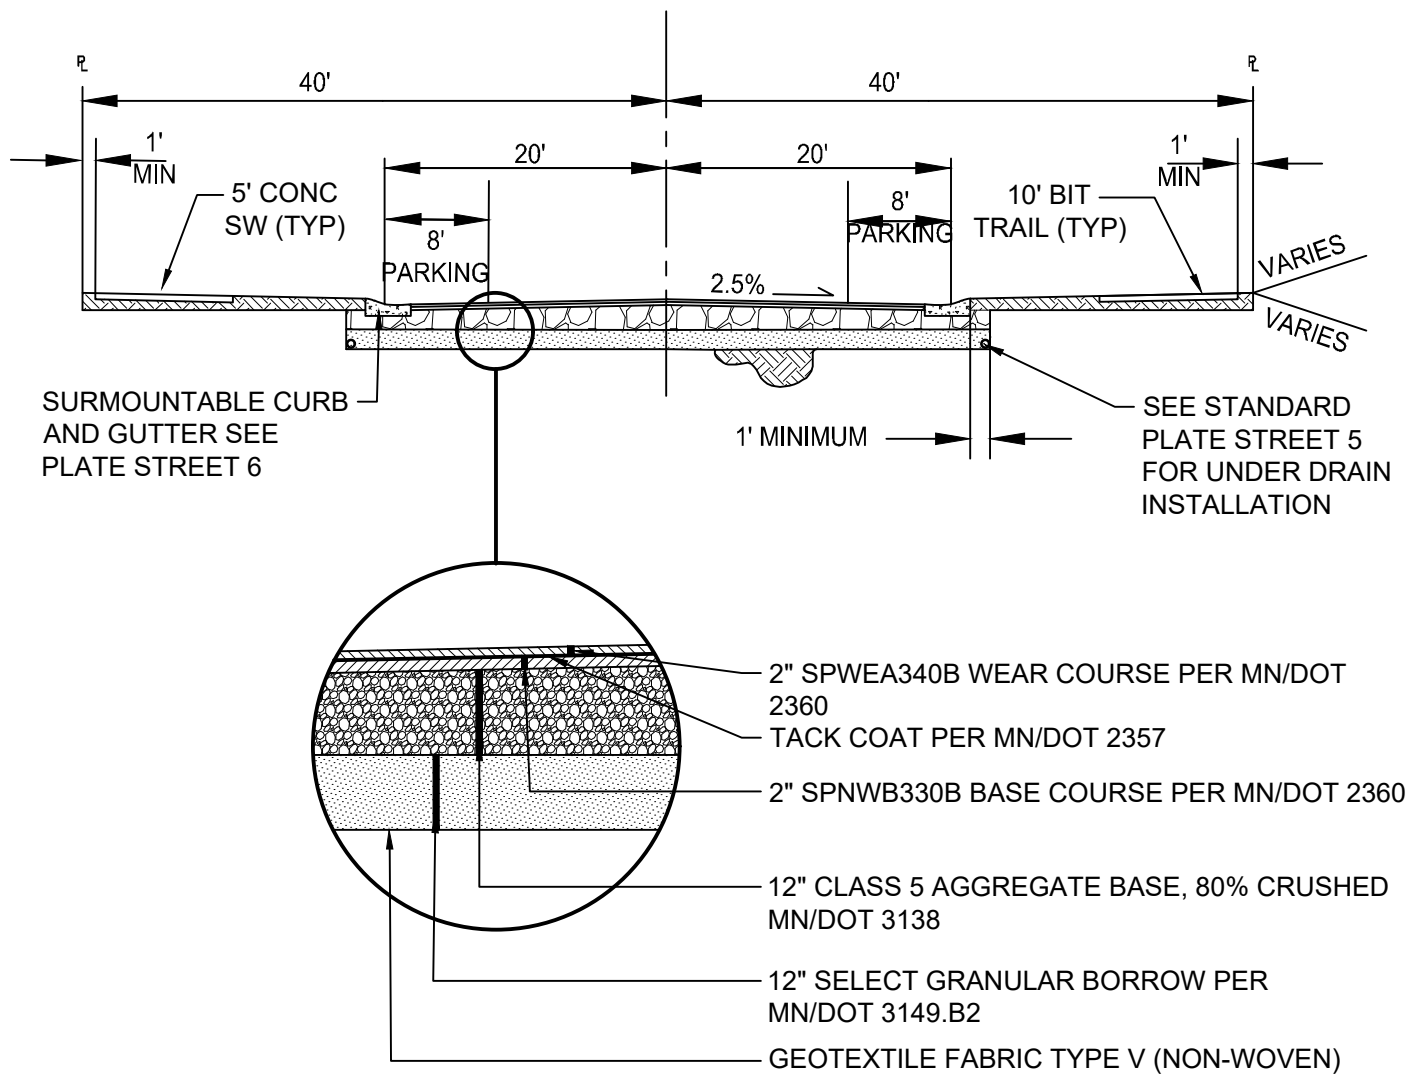

NOTES:

1. TYPICAL SECTION SHOWN IS THE MINIMUM RESIDENTIAL COLLECTOR STREET REQUIREMENT. SEE SPECIFICATIONS FOR PROJECT SPECIFIC DETAILS.
2. DRAINTILE SHALL BE INSTALLED BEHIND CURB. DRAINTILE TO BE INSTALLED AS REQUIRED TO ADEQUATELY DRAIN ALL SELECT GRANULAR FILL AREAS.
3. STREET SHALL BE DESIGNED WITH MINIMUM 0.60% AND MAXIMUM 6.00% GRADE.
4. THE CITY RESERVES THE RIGHT TO INCREASE THE STREET SECTION BASED ON SOIL CONDITIONS.
5. TACK COAT PER MN/DOT 2357 TO BE USED ON CURB PRIOR TO PLACEMENT OF BITUMINOUS
6. REFER TO THE HENNEPIN COUNTY BICYCLE TRANSPORTATION PLAN FOR TRAIL DETAILS.
4. WEARING COURSES MAY HAVE A MAXIMUM OF 10% RECYCLED ASPHALT PAVEMENT (RAP). NO RECYCLED ASPHALT SHINGLES (RAS) ALLOWED IN WEARING COURSES.
5. NON-WEARING COURSES MAY HAVE A MAXIMUM OF 20% RECYCLED ASPHALT PAVEMENT (RAP).




2025 Standard Detail Plates

RESIDENTIAL COLLECTOR STREET SECTION

LAST REVISION:
01/02/2025



PLATE NO.
STR-1B

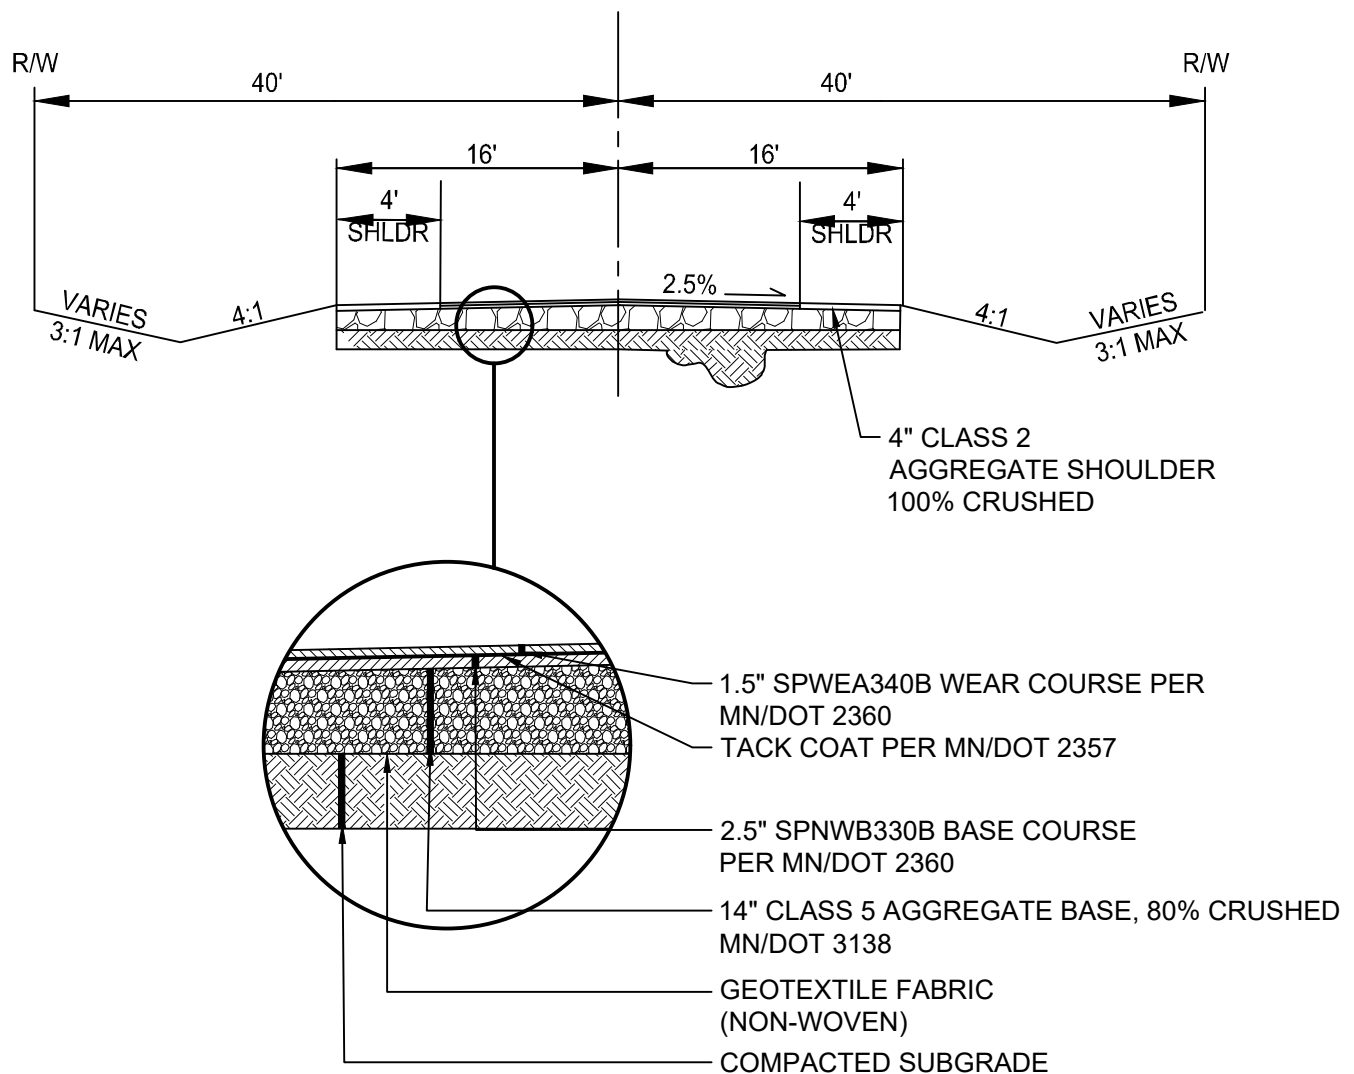

NOTES:

1. THE CITY RESERVES THE RIGHT TO INCREASE THE STREET SECTION BASED ON SOIL CONDITIONS.
2. SAW & SEAL ACCORDING TO MN/DOT 3725, AS DIRECTED BY THE CITY ENGINEER.
3. REFER TO THE HENNEPIN COUNTY BICYCLE TRANSPORTATION PLAN FOR TRAIL DETAILS.
4. WEARING COURSES MAY HAVE A MAXIMUM OF 10% RECYCLED ASPHALT PAVEMENT (RAP). NO RECYCLED ASPHALT SHINGLES (RAS) ALLOWED IN WEARING COURSES.
5. NON-WEARING COURSES MAY HAVE A MAXIMUM OF 20% RECYCLED ASPHALT PAVEMENT (RAP).
6. 4" SCH. 40 PVC DRAIN TILE SHALL BE INSTALLED ON BOTH SIDES OF THE STREET UNLESS OTHERWISE DIRECTED BY THE CITY ENGINEER. OUTLETS SHALL BE PROVIDED AT ALL LOW POINTS AND A MAXIMUM DISTANCE OF 500'. CLEAN OUTS SHALL BE INSTALLED AT A MAXIMUM 250' SPACING.




2025 Standard Detail Plates

RURAL COLLECTOR STREET SECTION

LAST REVISION:
01/02/2025



PLATE NO.
STR-1C

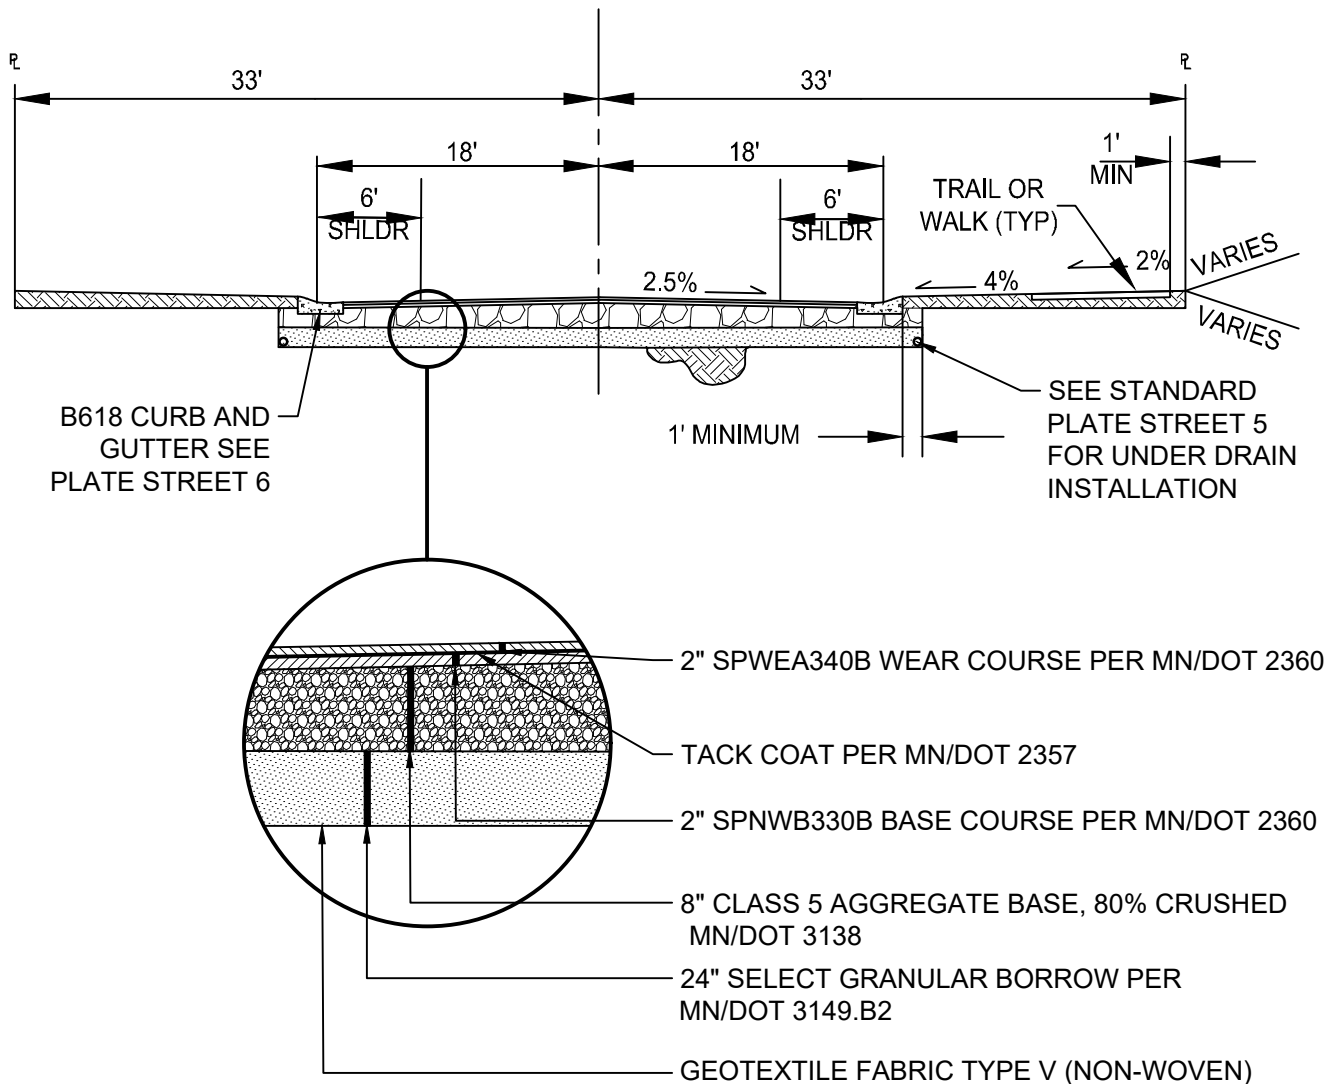

NOTES:

1. TYPICAL SECTION SHOWN IS THE MINIMUM COMMERCIAL STREET REQUIREMENT. SEE SPECIFICATIONS FOR PROJECT SPECIFIC DETAILS.
2. DRAINTILE SHALL BE INSTALLED BEHIND CURB. DRAINTILE TO BE INSTALLED AS REQUIRED TO ADEQUATELY DRAIN ALL SELECT GRANULAR FILL AREAS.
3. STREET SHALL BE DESIGNED WITH MINIMUM 0.60% AND MAXIMUM 6.00% GRADE.
4. THE CITY RESERVES THE RIGHT TO INCREASE THE STREET SECTION BASED ON SOIL CONDITIONS.
5. TACK COAT PER MN/DOT 2357 TO BE USED ON CURB PRIOR TO PLACEMENT OF BITUMINOUS
6. REFER TO THE HENNEPIN COUNTY BICYCLE TRANSPORTATION PLAN FOR TRAIL DETAILS.
7. RIGHT-OF-WAY WIDTH WILL INCREASE WHERE TURN LANES ARE REQUIRED. MAINTAIN A MINIMUM OF 15' BLVD BETWEEN CURB AND RIGHT-OF-WAY.
4. WEARING COURSES MAY HAVE A MAXIMUM OF 10% RECYCLED ASPHALT PAVEMENT (RAP). NO RECYCLED ASPHALT SHINGLES (RAS) ALLOWED IN WEARING COURSES.
5. NON-WEARING COURSES MAY HAVE A MAXIMUM OF 20% RECYCLED ASPHALT PAVEMENT (RAP).




2025 Standard Detail Plates

COMMERCIAL STREET SECTION


LAST REVISION:
01/02/2025




PLATE NO.
STR-1D

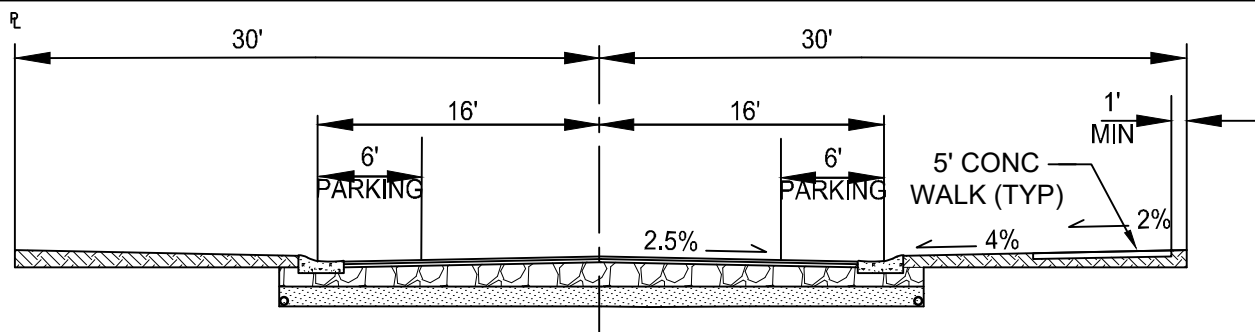


32 FOOT RESIDENTIAL STREET TWO SIDED PARKING

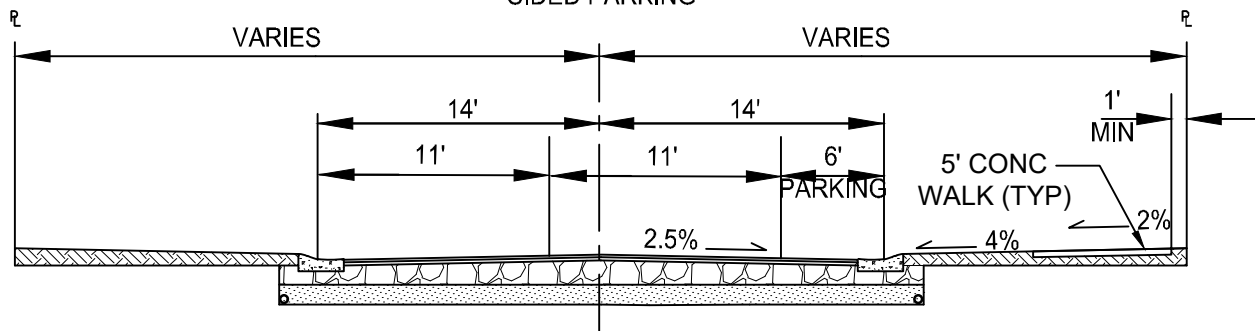

28 FOOT RESIDENTIAL STREET ONE SIDED PARKING

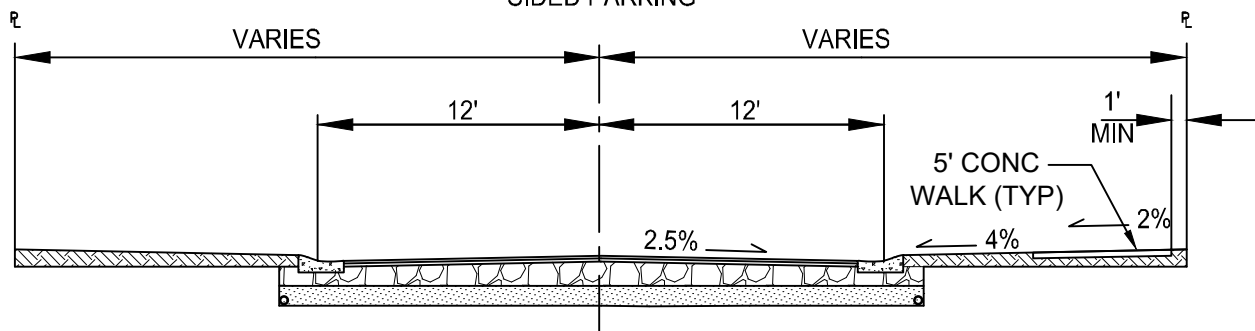

24 FOOT RESIDENTIAL STREET NO PARKING

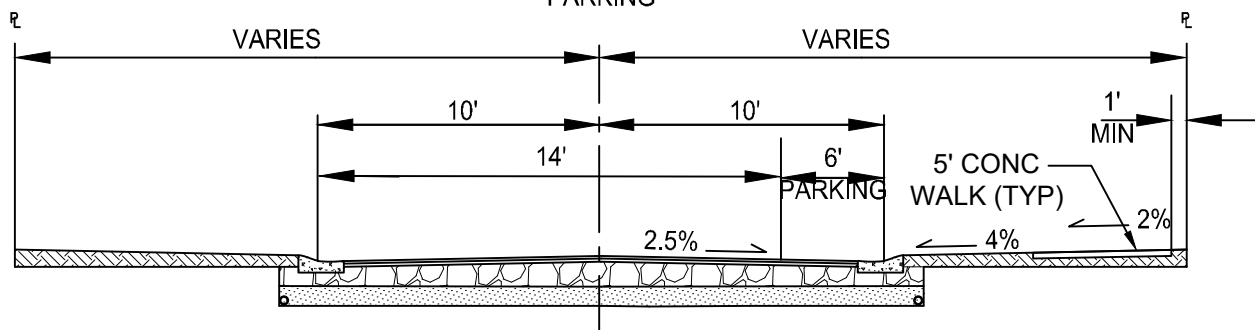

20 FOOT RESIDENTIAL STREET ONEWAY - ONE SIDED PARKING




2025 Standard Detail Plates

RESIDENTIAL STREET DIMENSIONS

LAST REVISION:
06/28/2024



PLATE NO.
STR-2

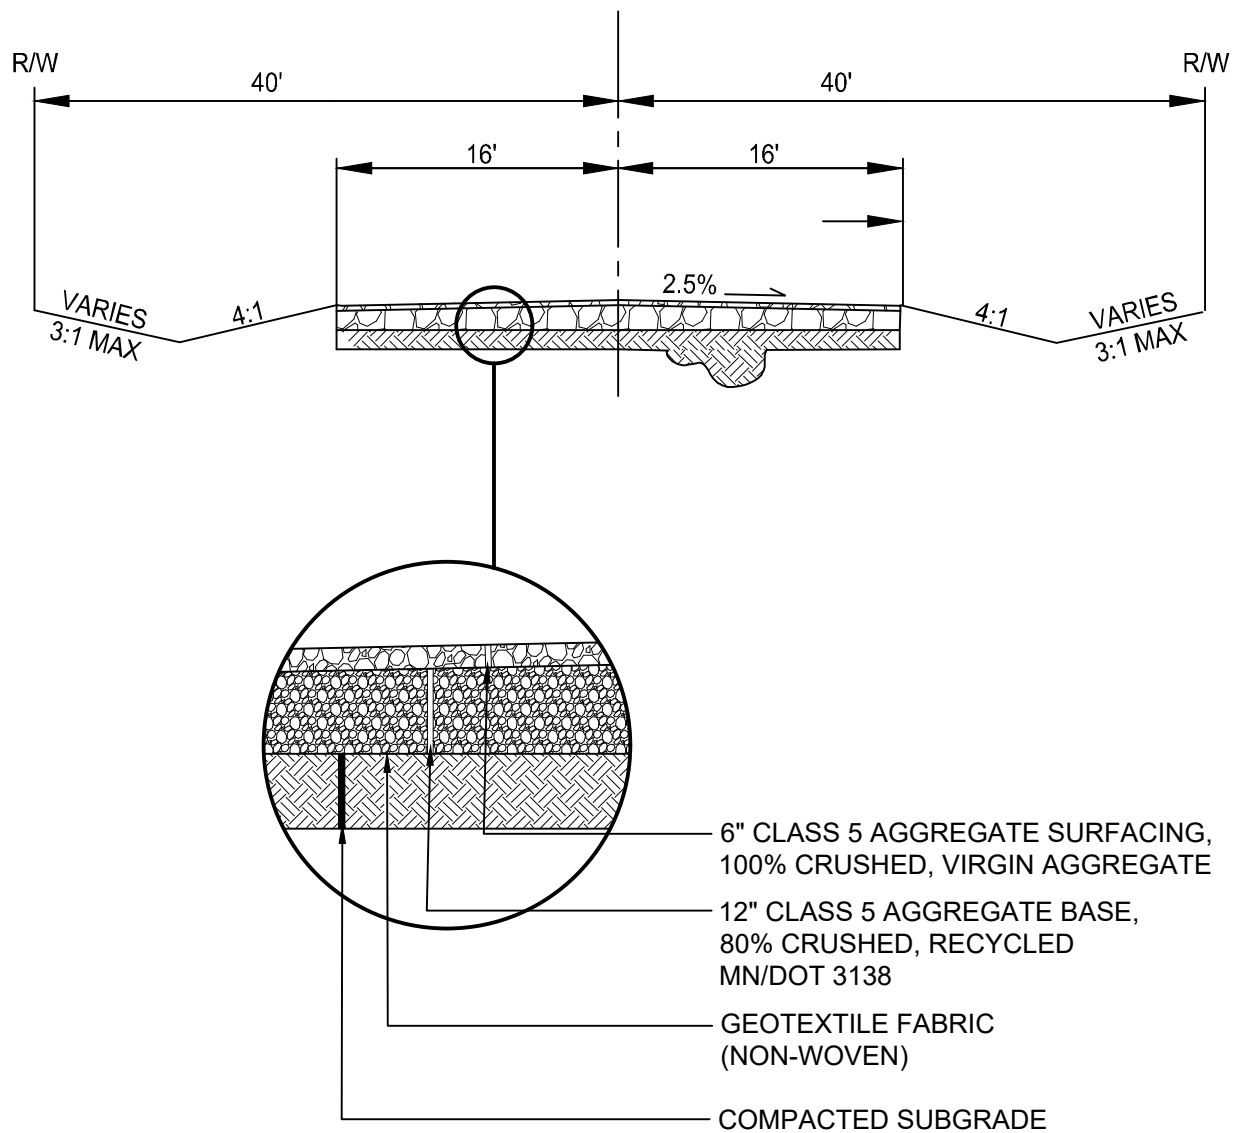

NOTES:

1. THE CITY RESERVES THE RIGHT TO INCREASE THE STREET SECTION BASED ON SOIL CONDITIONS.
2. REFER TO THE HENNEPIN COUNTY BICYCLE TRANSPORTATION PLAN FOR TRAIL DETAILS.
3. DRAIN TILE WILL BE REQUIRED BASED ON THE SUBGRADE MATERIAL PRESENT WITHIN THE ROAD SECTION AS DIRECTED BY THE CITY ENGINEER.




2025 Standard Detail Plates

GRAVEL ROAD

LAST REVISION:
01/02/2025



PLATE NO.
STR-3

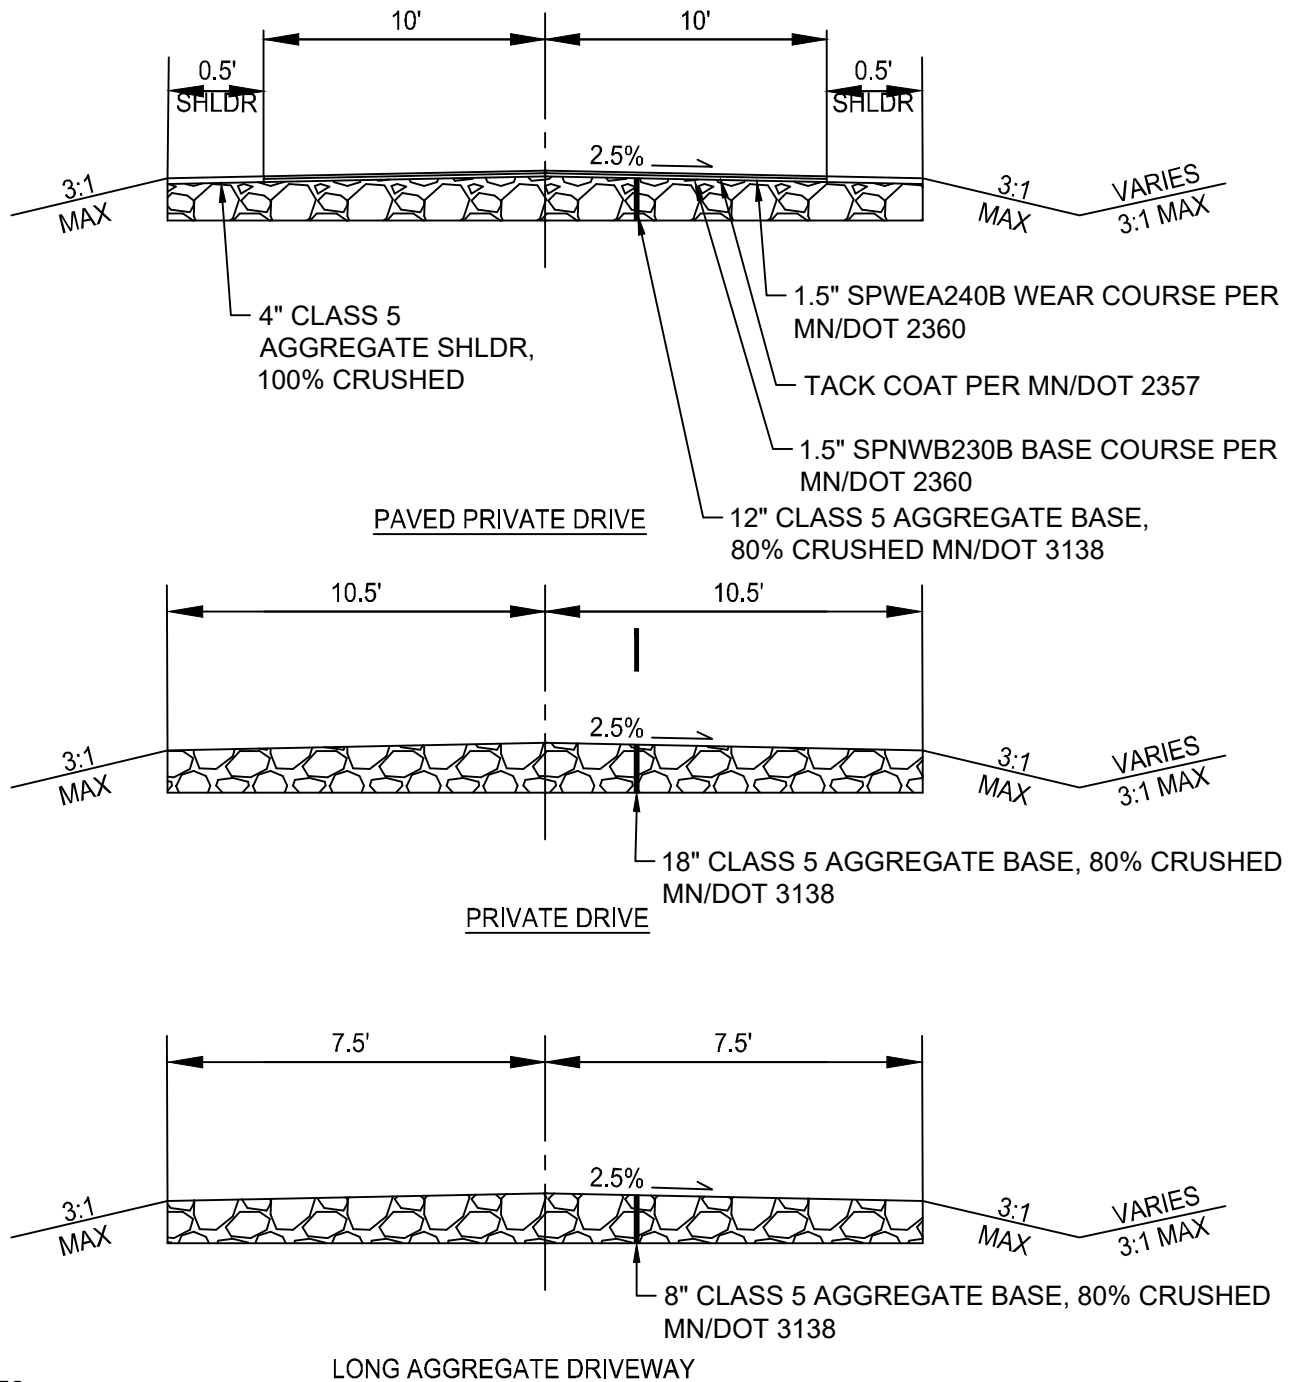

NOTES:

1. THE CITY RESERVES THE RIGHT TO INCREASE THE DRIVEWAY SECTION BASED ON SOIL CONDITIONS FOR A 10-TON SECTION.
2. MINIMUM SLOPE = 0.5%
3. MAXIMUM SLOPE = 10%.
4. A SINGLE DRIVEWAY IS RECOMMENDED TO FOLLOW THIS DETAIL, BUT MAY NOT BE REQUIRED.
5. ROLL TEST TO BE CONDUCTED
6. PAVED APRON REQUIRED WHEN PRIVATE DRIVE COMES OFF PAVED PUBLIC ROAD




2025 Standard Detail Plates

PRIVATE DRIVE & LONG DRIVEWAY

LAST REVISION:
01/02/2025



PLATE NO.
STR-4

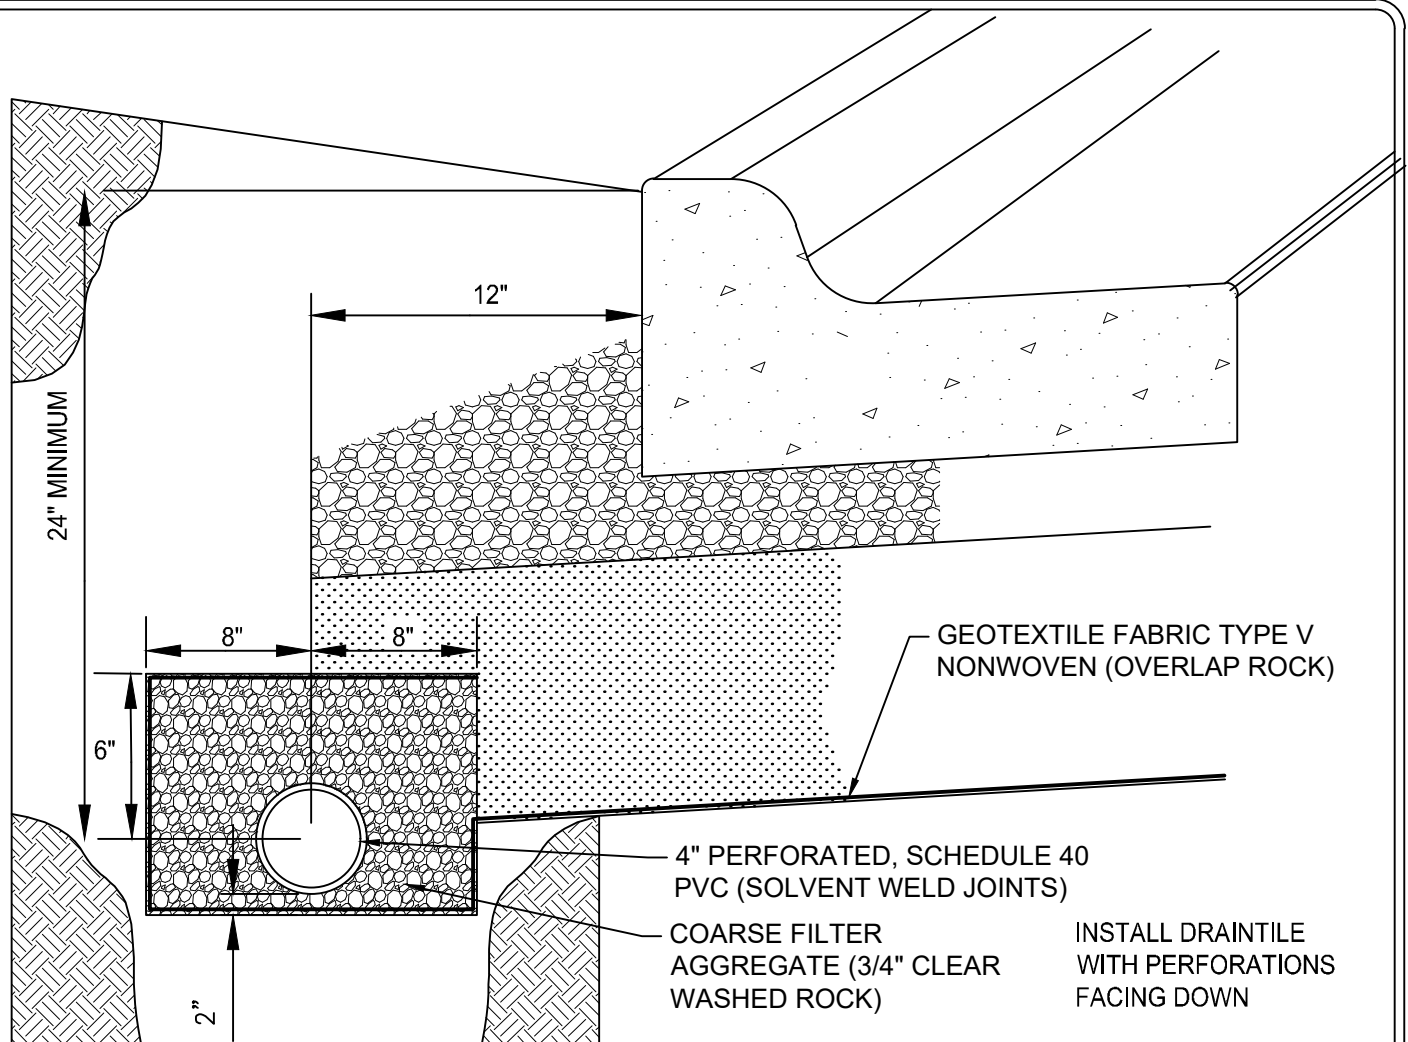

NOTES:

TRENCH DETAIL

1. PLACE SUB-DRAIN BEHIND ALL CURB & GUTTER 250 LF IN EACH DIRECTION FROM CATCH BASINS LOCATED AT LOCALIZED LOW POINTS AND 150 LF UPSTREAM FROM CATCH BASINS LOCATED IN THE MID SLOPE. A 10' CAPPED DRAIN TILE STUB WILL BE INSTALLED ON ALL CATCH BASINS WHERE DRAIN TILE IS ONLY BEING INSTALLED UPSTREAM.
2. CONNECT SUB-DRAIN TO NEAREST CATCHBASIN. CONNECTION TO BE CORE-DRILLED. DOGHOUSES MUST BE GROUTED BOTH INSIDE AND OUTSIDE OF STRUCTURE.
3. ALL STREETS WITH GRADES LESS THAN 1% WILL REQUIRE STREET DRAIN TILE
4. SLOPE SUB-DRAIN TO CATCH BASIN.
5. SUBDRAIN MAY BE DAYLIGHTED TO DITCH AS APPROVED BY CITY ENGINEER.
6. CLEANOUTS ARE REQUIRED AT A MAXIMUM OF 300 FOOT INTERVALS, AT BENDS, AND AT THE END OF THE RUN. SEE DETAIL STO-23 FOR CLEANOUT FABRICATION.
7. CLEANOUTS TO BE LOCATED ON PROPERTY CORNERS.
8. IF CLEANOUT IS TO BE LOCATED WITHIN 50' OF CATCH BASIN. REMOVE CLEAN OUT AND TIE DRAIN TILE INTO THE CATCH BASIN
9. CONTRACTOR TO TELEWISE DRAINTILE PRIOR TO ACCEPTANCE OF STREET. DRAINTILE TO BE TELEVISED IN THE PRESENCE OF CITY AFTER PRIVATE UTILITIES ARE INSTALLED. TELEVISING IS CONSIDERED INCIDENTAL TO INSTALLATION.







2025 Standard Detail Plates

ROAD SUB DRAIN

LAST REVISION:
01/02/2025



PLATE NO.
STR-5

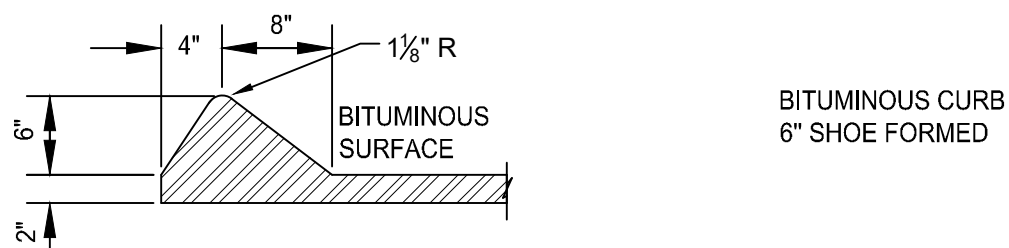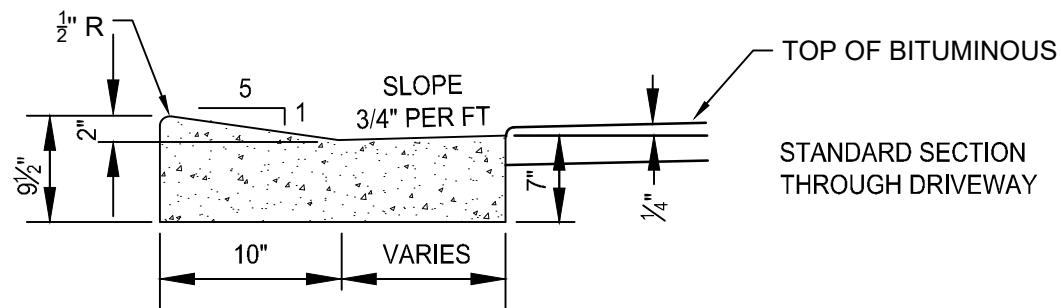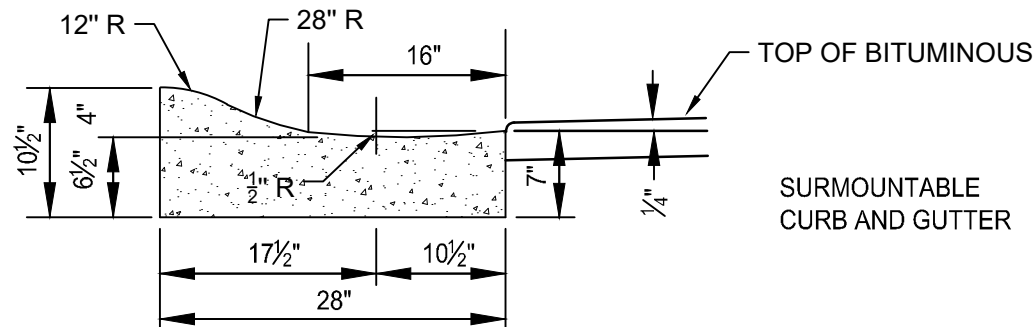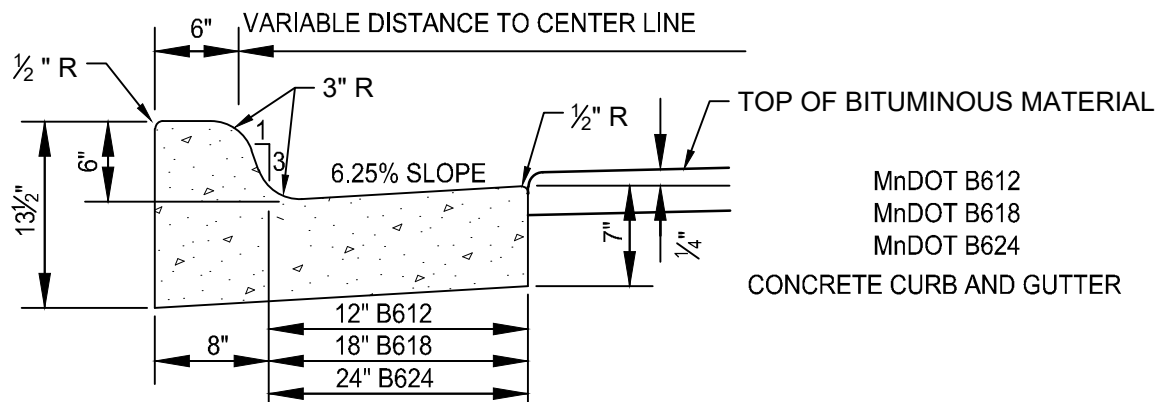

NOTES:

1. ONCE CURB AND GUTTER ARE INSTALLED, ENSURE EROSION CONTROL MEASURES ARE PROPERLY ESTABLISHED.
2. USE SUITABLE MATERIAL TO BACKFILL AREA BEHIND CURB.
3. PLACE "CO" STAMP AT LOCATION OF ALL STREET DRAIN TILE CLEAN OUTS




2025 Standard Detail Plates

CURB AND GUTTER

LAST REVISION:
06/28/2024




PLATE NO.
STR-6

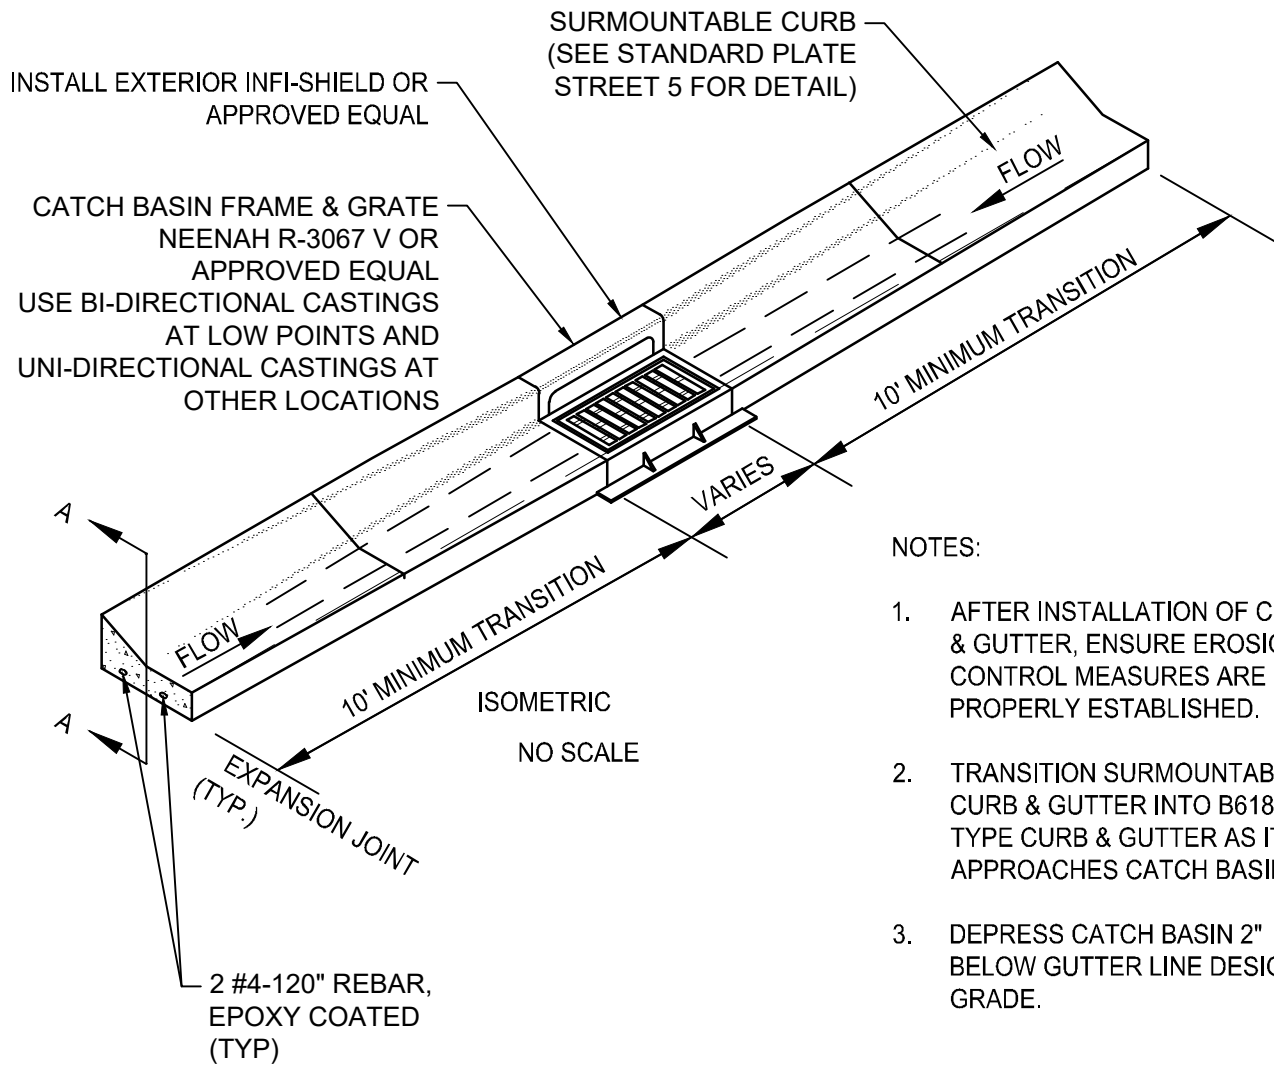

NOTES:

1. AFTER INSTALLATION OF CURB & GUTTER, ENSURE EROSION CONTROL MEASURES ARE PROPERLY ESTABLISHED.
2. TRANSITION SURMOUNTABLE CURB & GUTTER INTO B618 TYPE CURB & GUTTER AS IT APPROACHES CATCH BASIN.
3. DEPRESS CATCH BASIN 2" BELOW GUTTER LINE DESIGN GRADE.

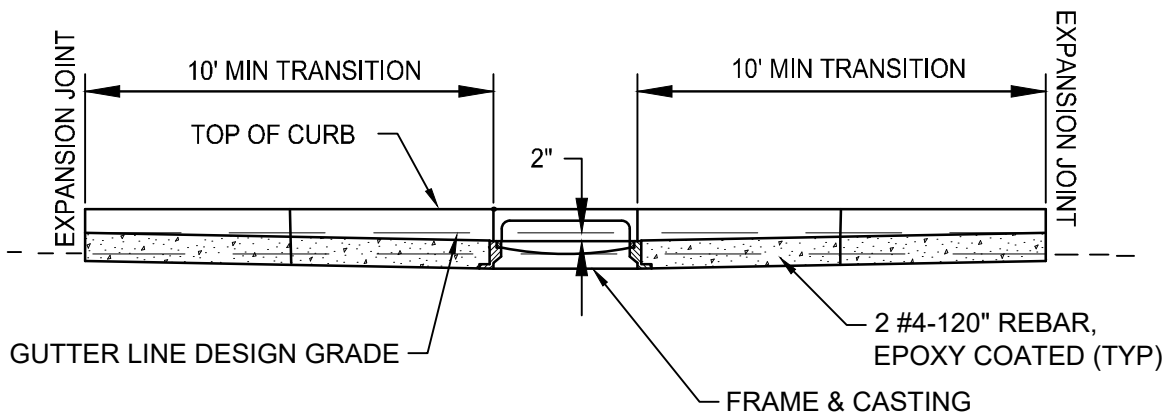

SECTION A-A

NO SCALE





2025 Standard Detail Plates

SURMOUNTABLE CURB TRANSITION AT CATCH BASIN

LAST REVISION:
06/28/2024



PLATE NO.
STR-7

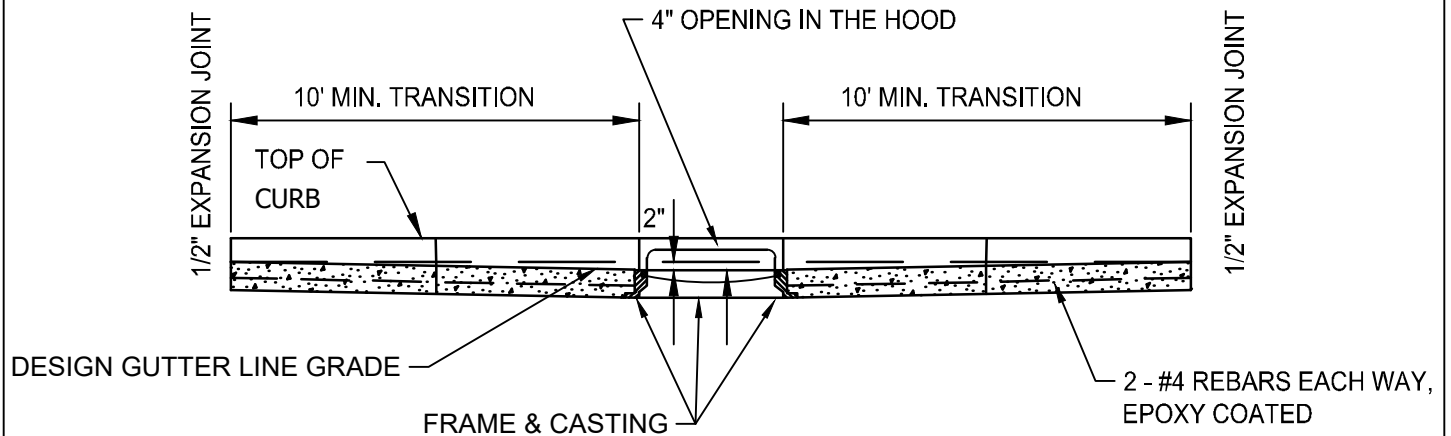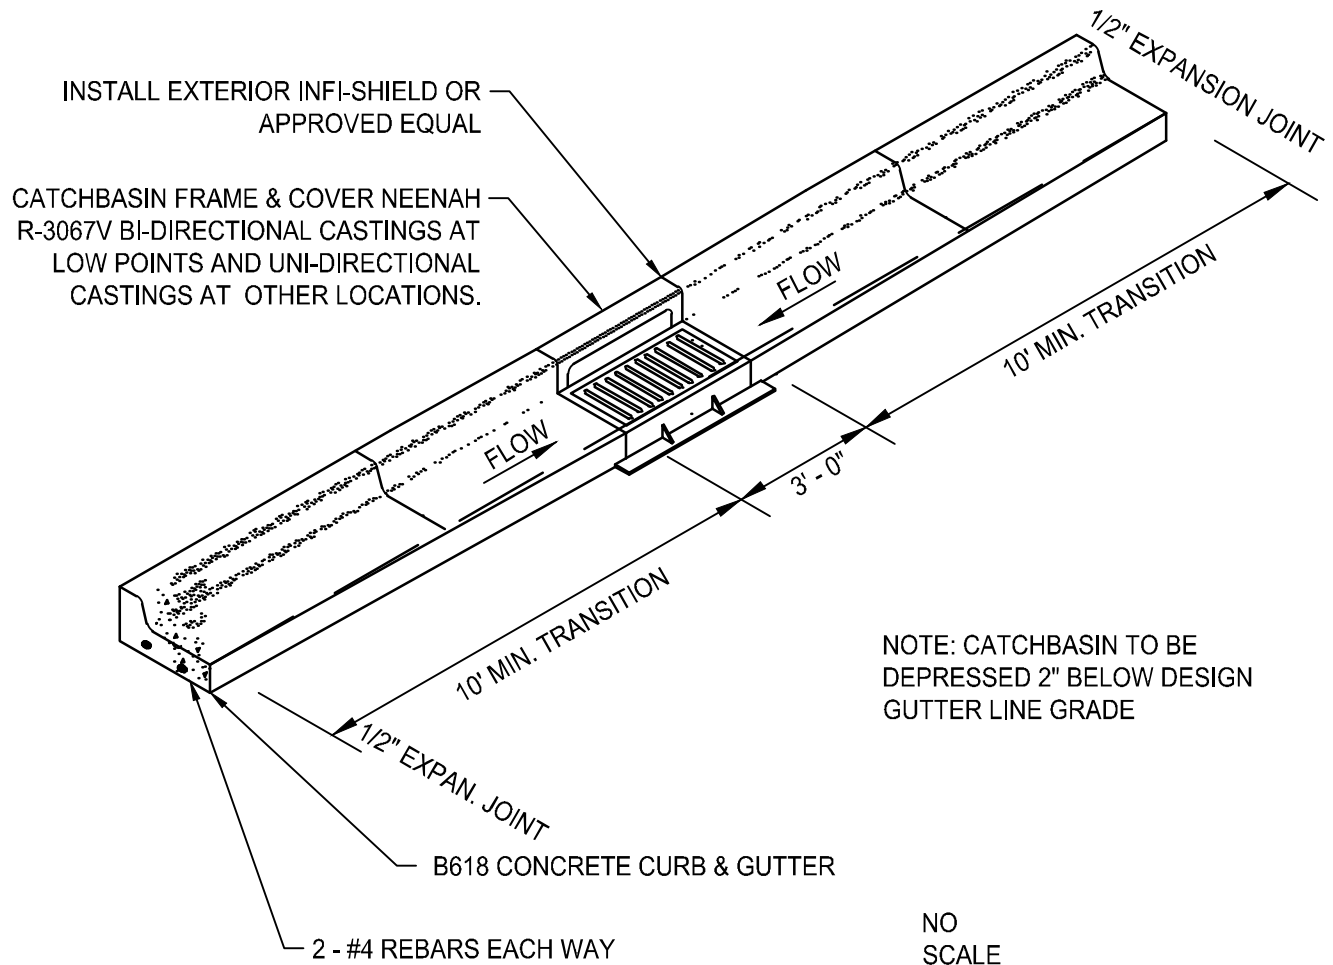


2025 Standard Detail Plates

B618 CURB TRANSITION AT CATCH BASIN

LAST REVISION:
06/28/2024



PLATE NO.
STR-8

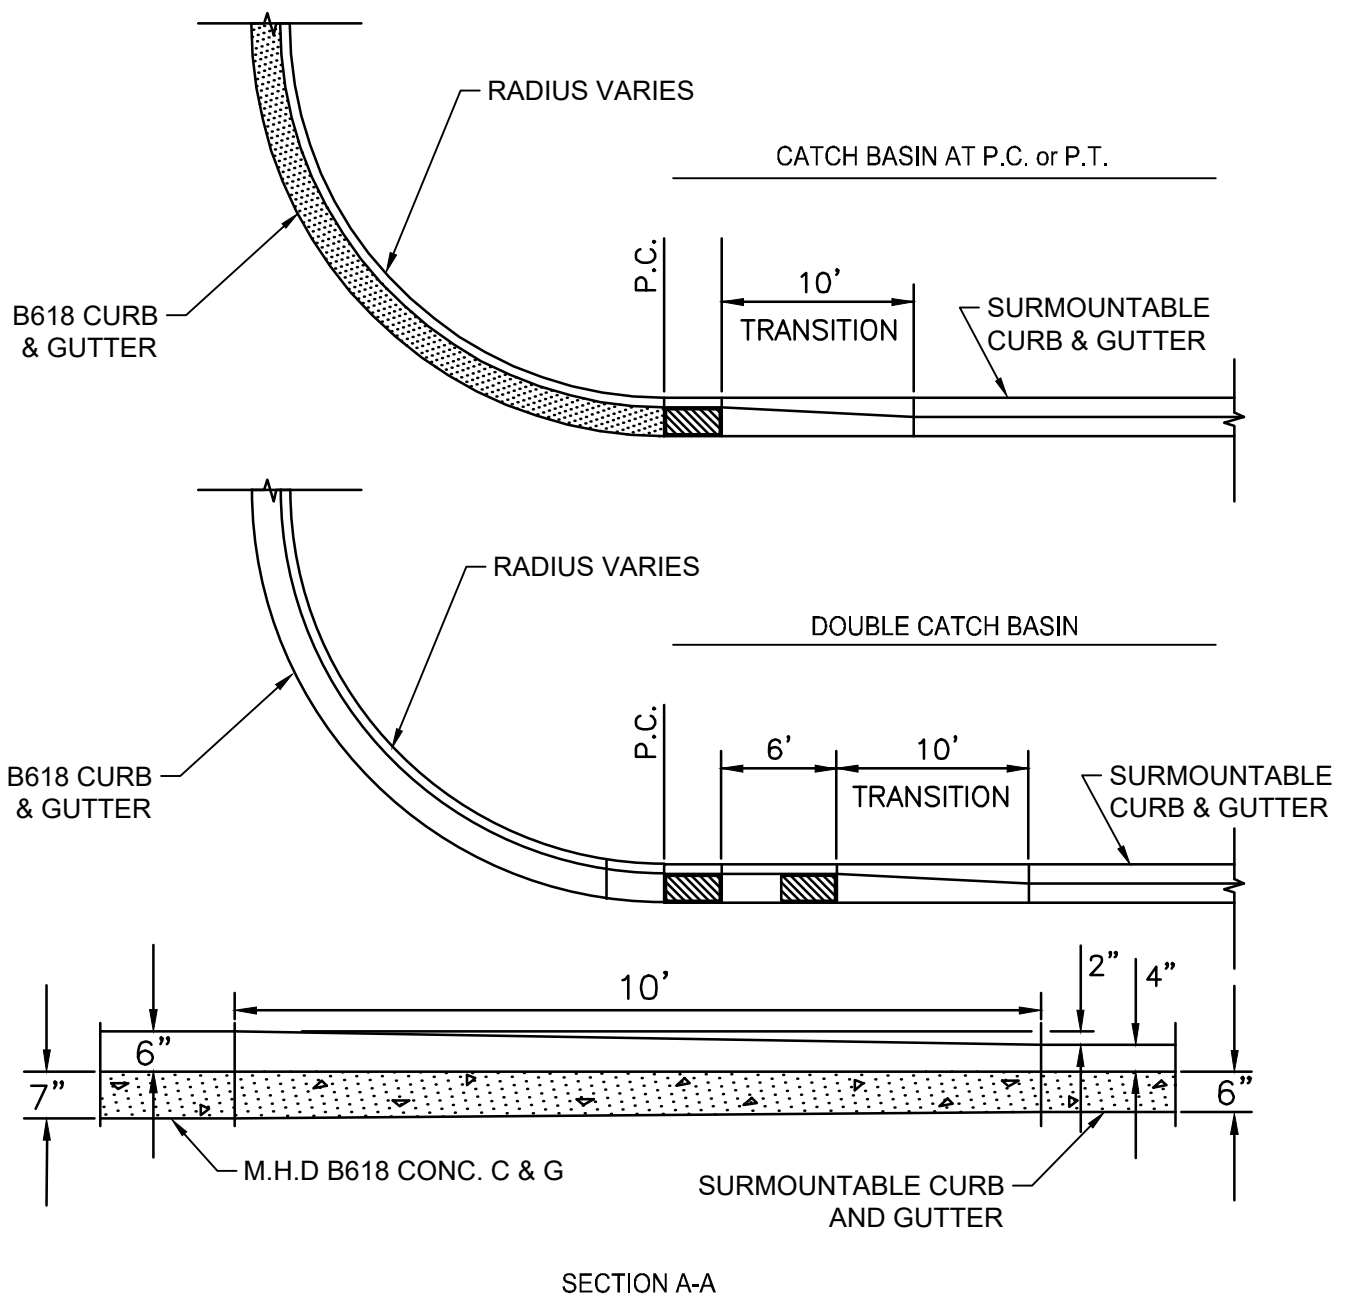

NOTES:

1. ALL RADII ARE MEASURED TO FACE OF CURB.
2. NO CATCH BASINS WILL BE CONSTRUCTED IN THE INTERSECTION RADII.
3. 30' RADII WILL BE REQUIRED AT INTERSECTIONS OF ALL COLLECTOR TO RESIDENTIAL STREETS.
4. 25' RADII WILL BE REQUIRED AT INTERSECTIONS OF ALL RESIDENTIAL TO RESIDENTIAL STREETS.




2025 Standard Detail Plates

CURB AND GUTTER TRANSITIONS

LAST REVISION:
06/28/2024




PLATE NO.
STR-9

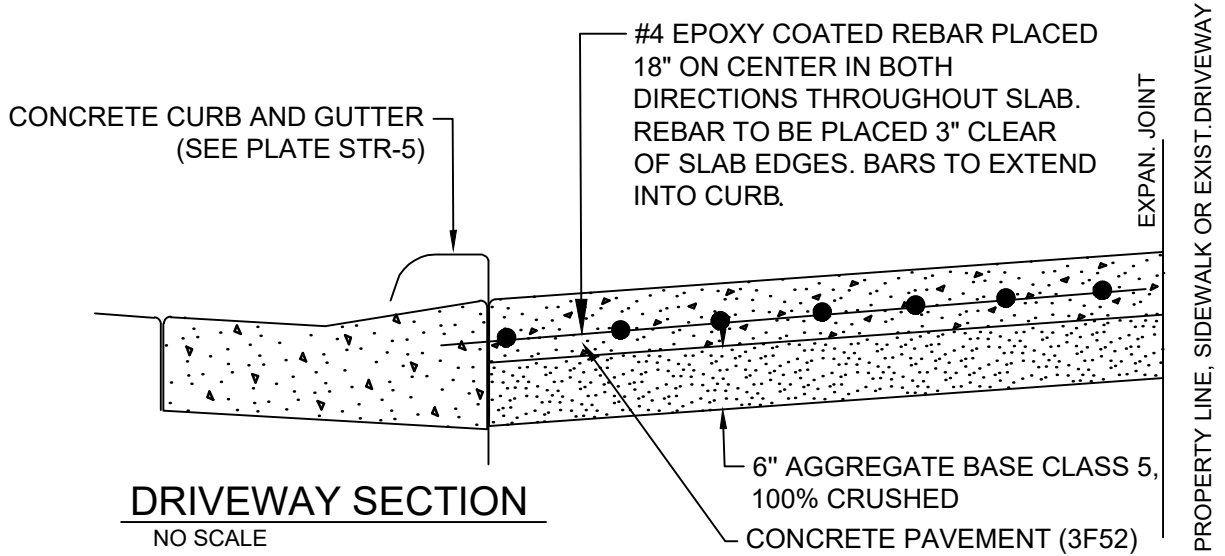

DRIVEWAY SECTION
NO SCALE

1. PANEL WIDTH SHALL NOT EXCEED 10 FEET WITHOUT A CONTRACTION JOINT.
2. DRIVEWAY TO BE ONE COURSE CONCRETE PAVEMENT.
3. 6" THICK FOR RESIDENTIAL DRIVE, 8" THICK FOR COMMERCIAL DRIVE AND ALLEY OR SPECIFIED.
4. MAXIMUM DRIVEWAY WIDTH = 24'.
5. MINIMUM DISTANCE FROM LOT LINE = 5' AS MEASURED 5 FEET FROM THE BACK OF CURB.
6. CAPS REQUIRED ON CURBSTOPS LOCATED IN DRIVEWAYS.
7. ALL DRIVEWAYS MUST BE AT LEAST 60' FROM INTERSECTIONS MEASURED FROM C-C TO CENTER OF DRIVEWAY.

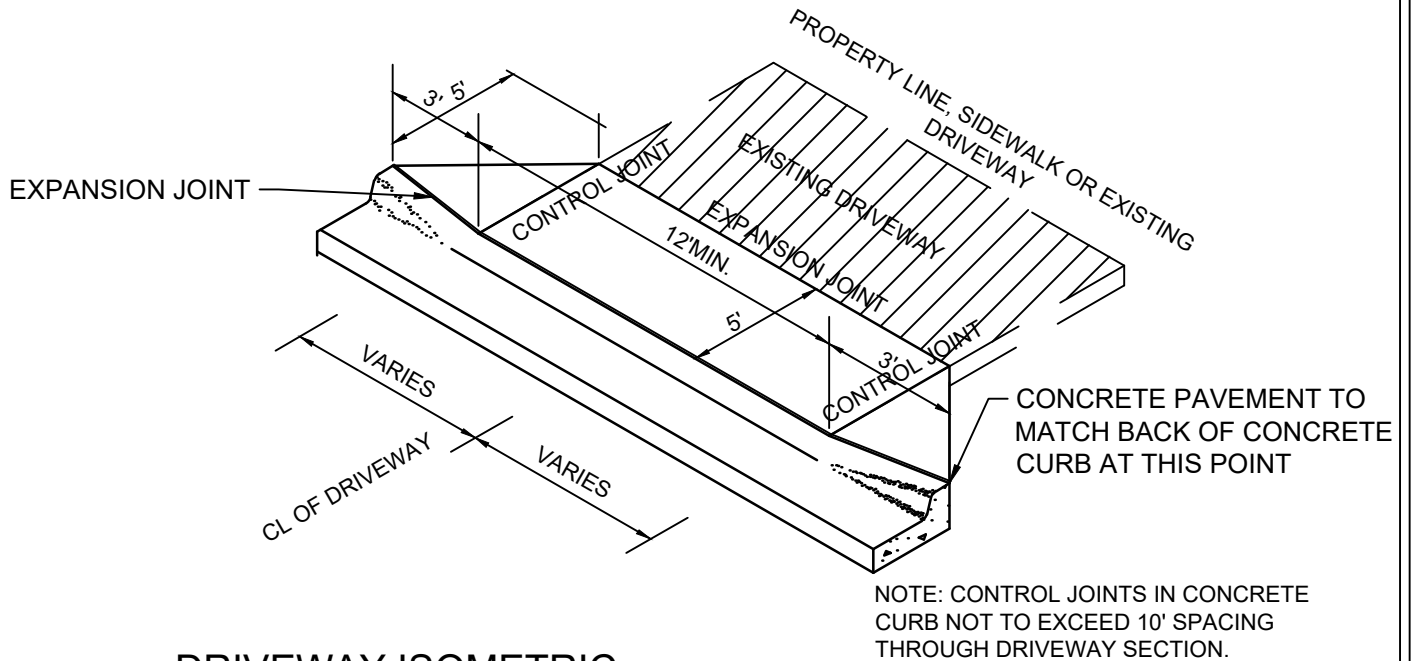

DRIVEWAY ISOMETRIC
NO SCALE



2025 Standard Detail Plates

RESIDENTIAL DRIVEWAY APRON

LAST REVISION:
06/28/2024



PLATE NO.
STR-10

#4 EPOXY COATED REBAR PLACED 18" ON CENTER IN BOTH DIRECTIONS THROUGHOUT SLAB. REBAR TO BE PLACED 3" CLEAR OF SLAB EDGES. BARS TO EXTEND INTO CURB.

EXPANSION JOINT MATERIAL TO CONFORM TO MNDOT 3702

1/2" THICK - 6" HIGH EXPANSION JOINT MATERIAL

5'


MIN .50%
MAX 10.0%

MOUNTABLE TYPE CONCRETE CURB AND GUTTER STR-01

EXPAN. JOINT
EXISTING OR PROPOSED DRIVEWAY

SECTION
NO
SCALE

6" CONCRETE PAVEMENT (3F52)
6" CLASS 5 AGGREGATE BASE OR RECYCLED EQUAL, 100% CRUSHED. INCIDENTAL TO CONCRETE APRON(MNDOT 3138)

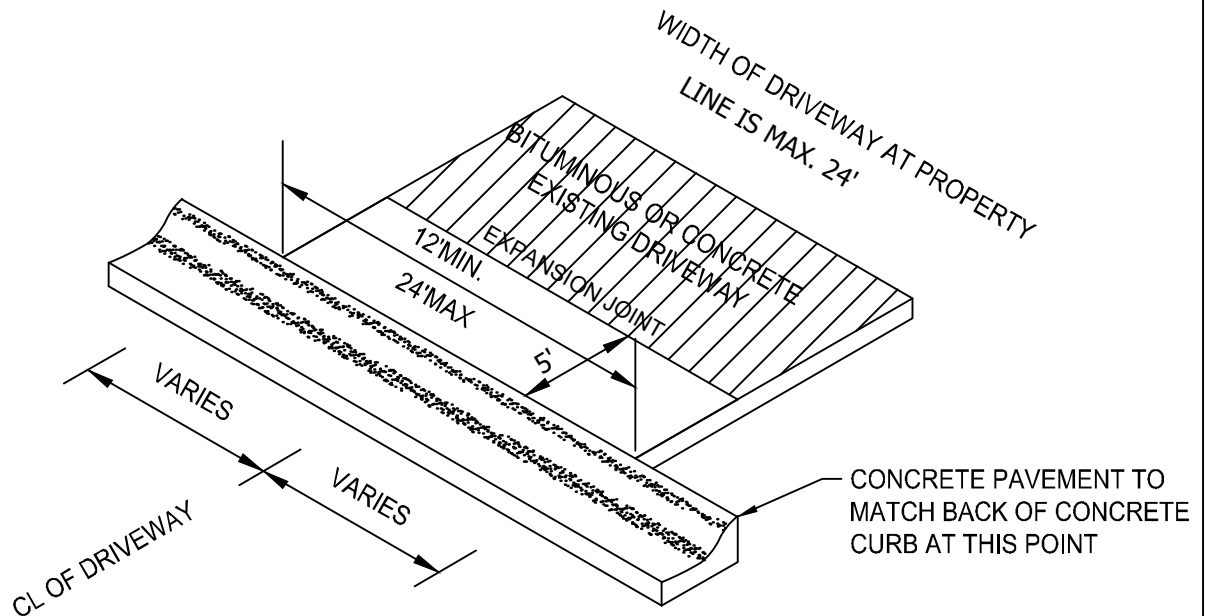

ISOMETRIC
NO SCALE

NOTE:

1. CONTROL JOINTS IN CONCRETE CURB NOT TO EXCEED 10' SPACING THROUGH DRIVEWAY SECTION.
2. THE MAXIMUM DRIVEWAY WIDTH AT THE CURB IS 24'. MAXIMUM WIDTH OF DRIVEWAY AT THE PROPERTY LINE IS ALSO 24'.
3. APRON NOT REQUIRED IN NEW DRIVEWAY CONSTRUCTION.



2025 Standard Detail Plates

RESIDENTIAL DRIVEWAY APRON (MOUNTABLE CURB)

LAST REVISION:
06/28/2024



PLATE NO.
STR-11




PLATE NO.
STR-12

#4 EPOXY COATED REBAR PLACED 18" ON CENTER IN BOTH DIRECTIONS THROUGHOUT SLAB. REBAR TO BE PLACED 3" CLEAR OF SLAB EDGES. BARS TO EXTEND INTO CURB.

MOUNTABLE TYPE CONCRETE CURB AND GUTTER STR-01

1/2" THICK - 6" HIGH EXPANSION JOINT MATERIAL

CONCRETE SIDEWALK SLOPE IS 2.0%

MIN .50%
MAX 10.0%

6"

PROPERTY LINE AND
EXISTING OR PROPOSED
DRIVEWAY


VARIABLE

6" CONCRETE PAVEMENT (3F52)

6" CLASS 5 AGGREGATE BASE OR RECYCLED EQUAL, 100% CRUSHED. INCIDENTAL TO CONCRETE APRON(MNDOT 3138)

SECTION

NO
SCALE

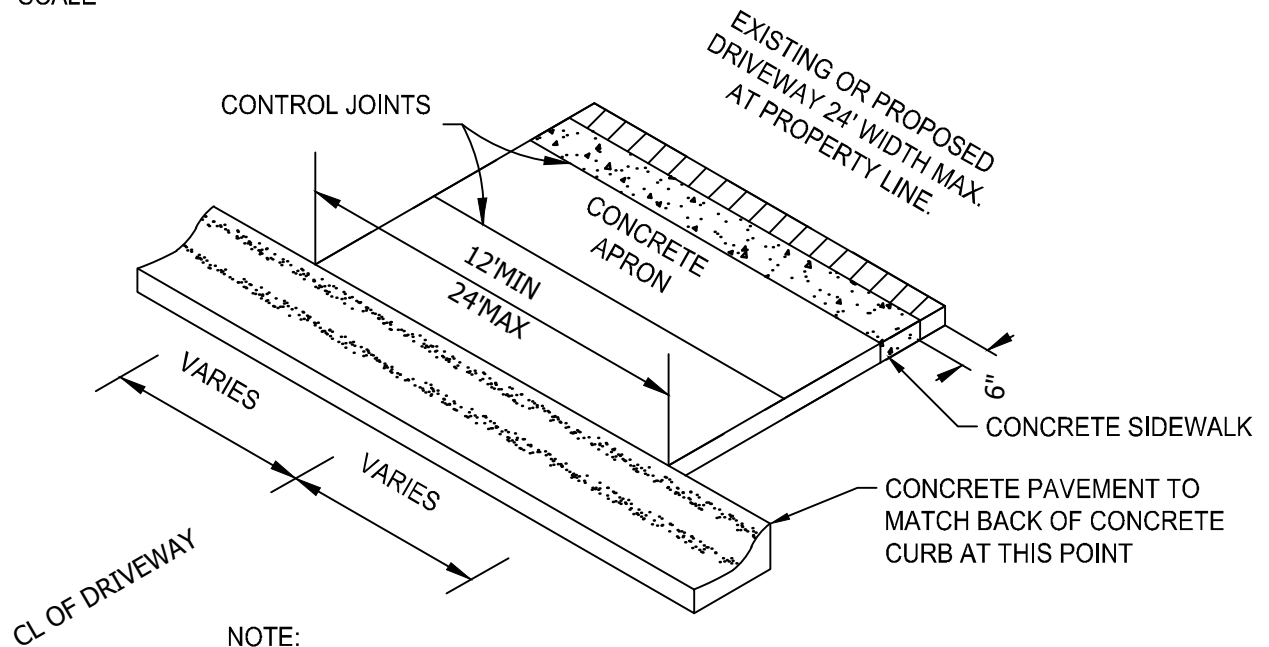

ISOMETRIC

NO
SCALE

NOTE:

1. CONTROL JOINTS IN CONCRETE CURB NOT TO EXCEED 10' SPACING THROUGH DRIVEWAY SECTION.
2. CONCRETE MUST BE CONSTRUCTED BETWEEN SIDEWALK AND DRIVEWAY APRON.
3. CONCRETE SIDEWALK THROUGH DRIVEWAY IS 6" THICK.
4. THE MAXIMUM DRIVEWAY WIDTH AT THE CURB IS 24'. MAXIMUM WIDTH OF DRIVEWAY AT THE PROPERTY LINE IS ALSO 24'.



2025 Standard Detail Plates


RESIDENTIAL DRIVEWAY APRON WITH S.W. (MOUNTABLE CURB)

LAST REVISION:
06/28/2024



PLATE NO.
STR-13

#4 EPOXY COATED REBAR PLACED 10" ON CENTER IN BOTH DIRECTIONS THROUGHOUT SLAB. REBAR TO BE PLACED 3" CLEAR OF SLAB EDGES.

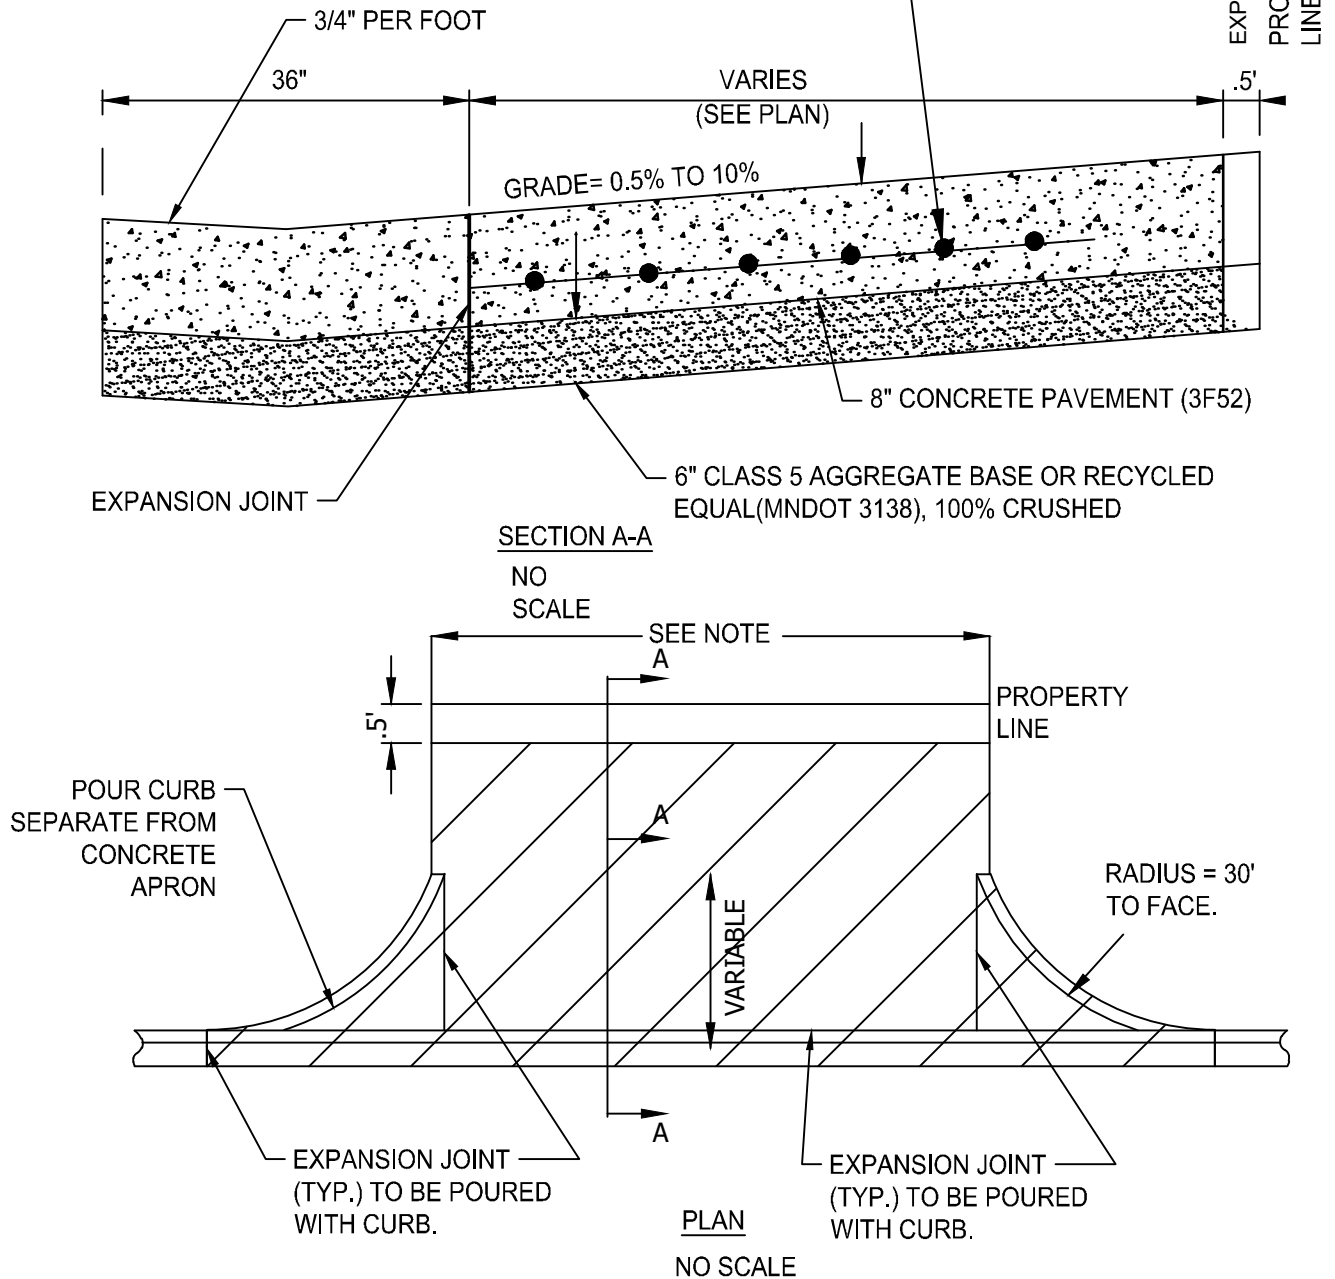

NOTE:
MAX COMMERCIAL DRIVEWAY WIDTH TO BE 32' AT RIGHT-OF-WAY.
ADDITIONAL EXPANSION JOINTS TO BE SAW CUT.



2025 Standard Detail Plates


COMMERICAL CONCRETE DRIVEWAY APRON

LAST REVISION:
06/28/2024




PLATE NO.
STR-14

#4 EPOXY COATED REBAR PLACED 10" ON CENTER IN BOTH DIRECTIONS THROUGHOUT SLAB. REBAR TO BE PLACED 3" CLEAR OF SLAB EDGES.

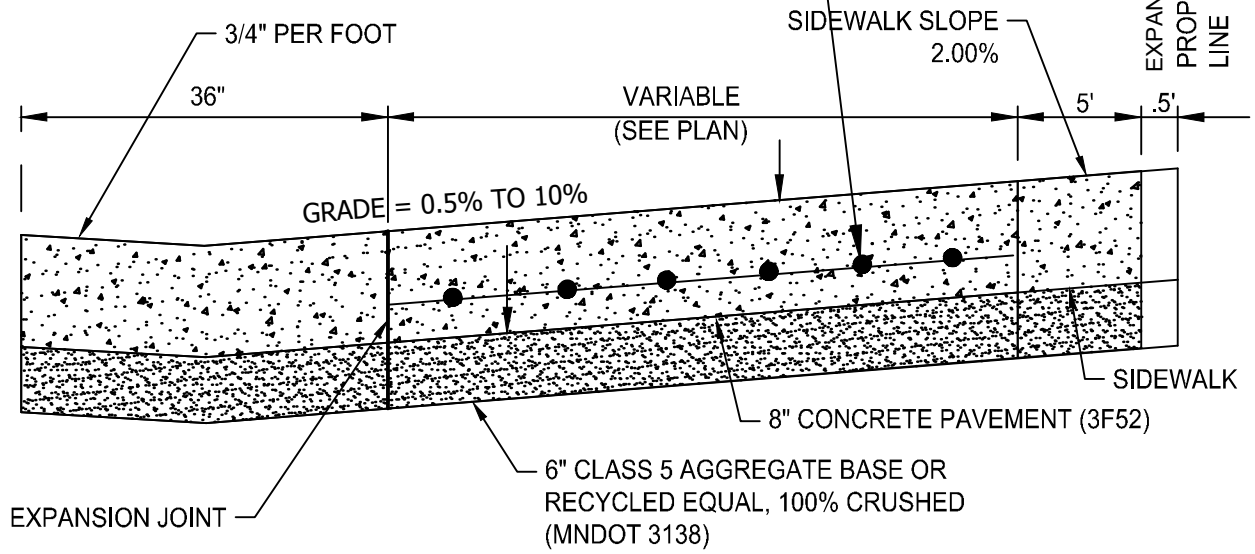

SECTION A-A

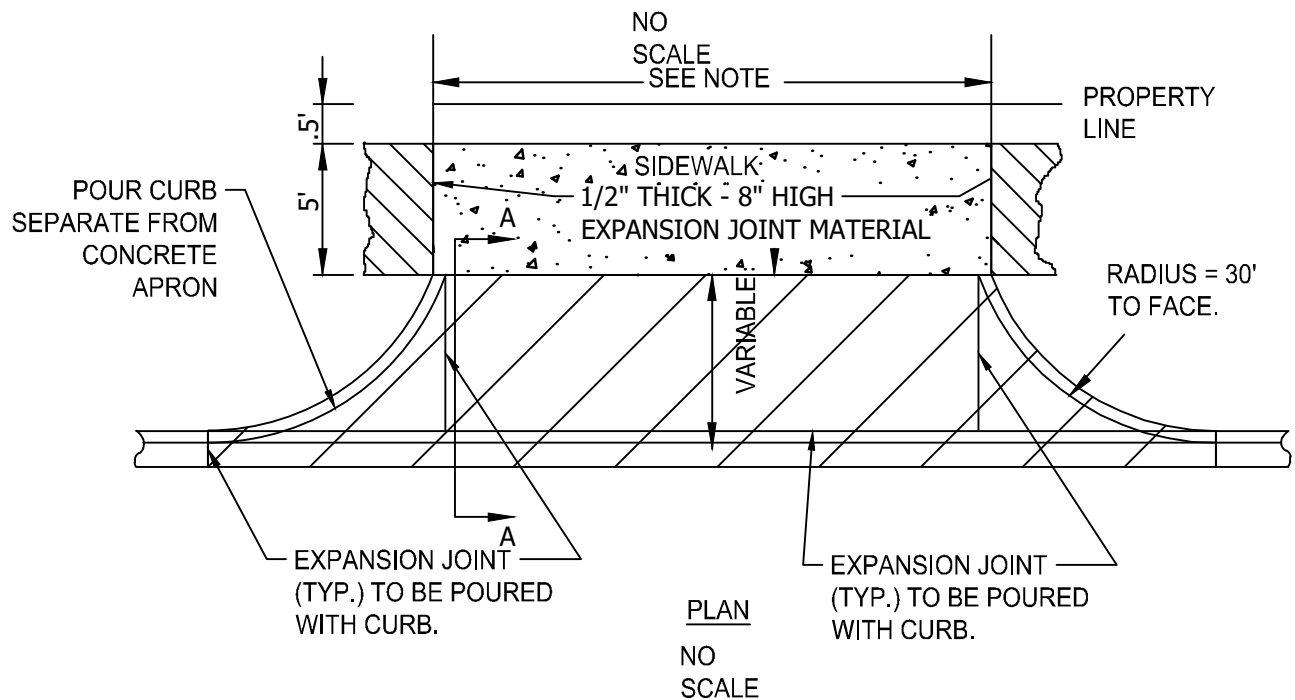

NOTE:
MAX COMMERCIAL DRIVEWAY WIDTH TO BE 32' AT RIGHT-OF-WAY.






2025 Standard Detail Plates

COMMERCIAL CONCRETE DRIVEWAY APRON WITH S.W.

LAST REVISION:
06/28/2024



PLATE NO.
STR-15

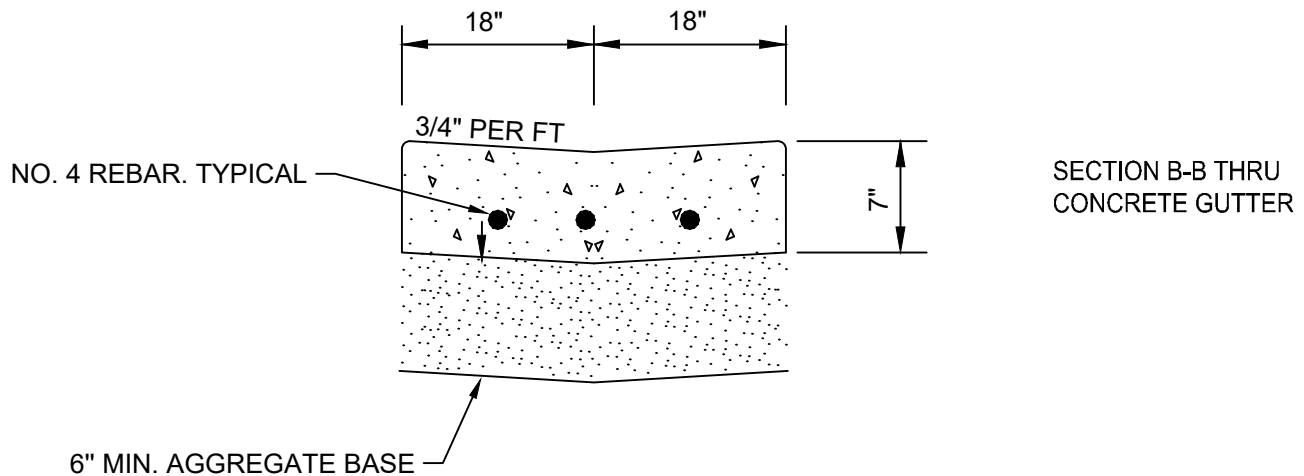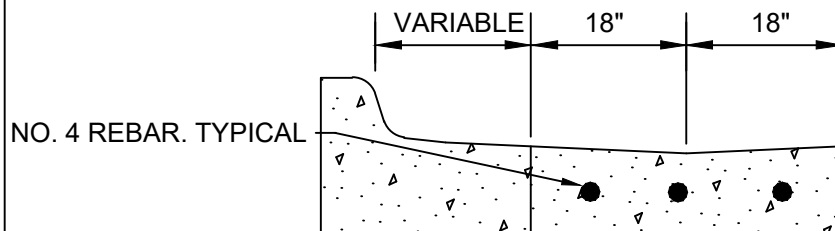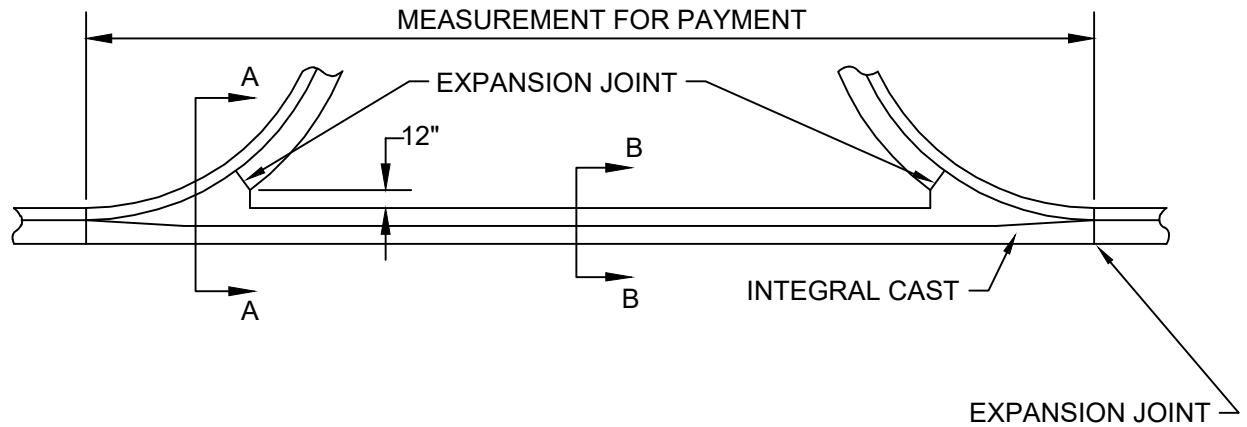



2025 Standard Detail Plates

CONCRETE VALLEY GUTTER

LAST REVISION:
06/28/2024



PLATE NO.
STR-16

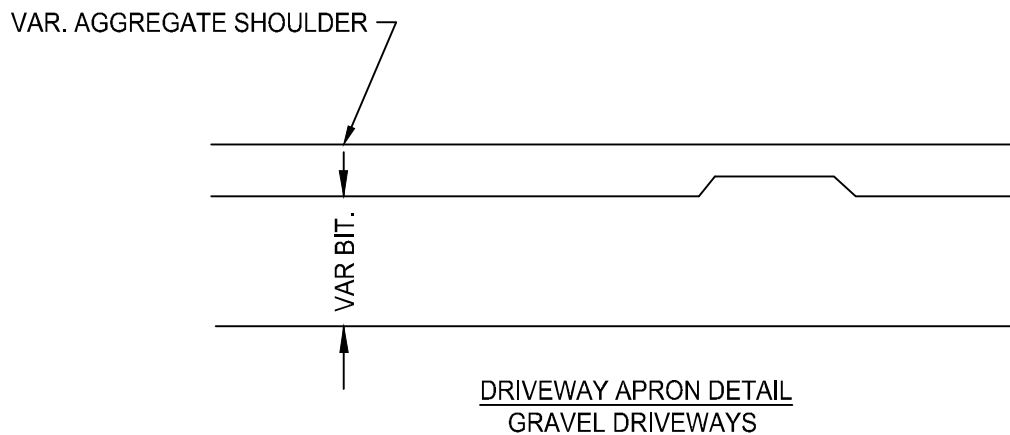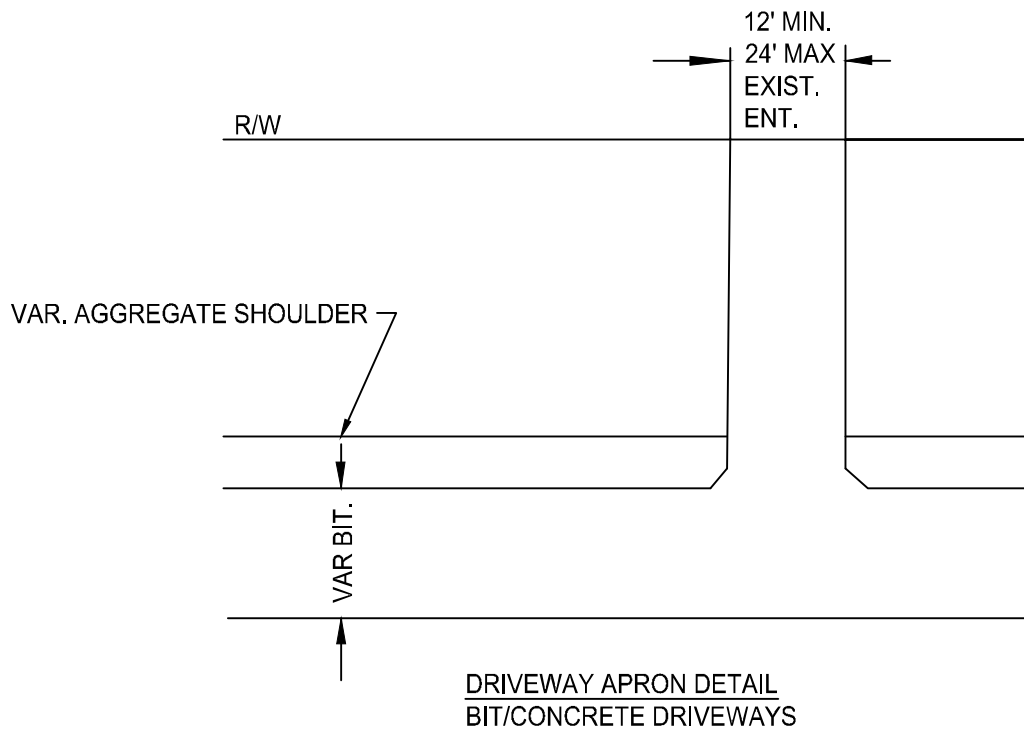

NOTES:

1. FIELD ENTRANCES TO BE TREATED AS GRAVEL DRIVEWAYS
2. MINIMUM DRIVEWAY SLOPE = 0.50%
3. MAXIMUM DRIVEWAY SLOPE = 10.0%




2025 Standard Detail Plates

RESIDENTIAL DRIVEWAY APRON
RURAL ROAD SECTION

LAST REVISION:
06/28/2024



PLATE NO.
STR-17

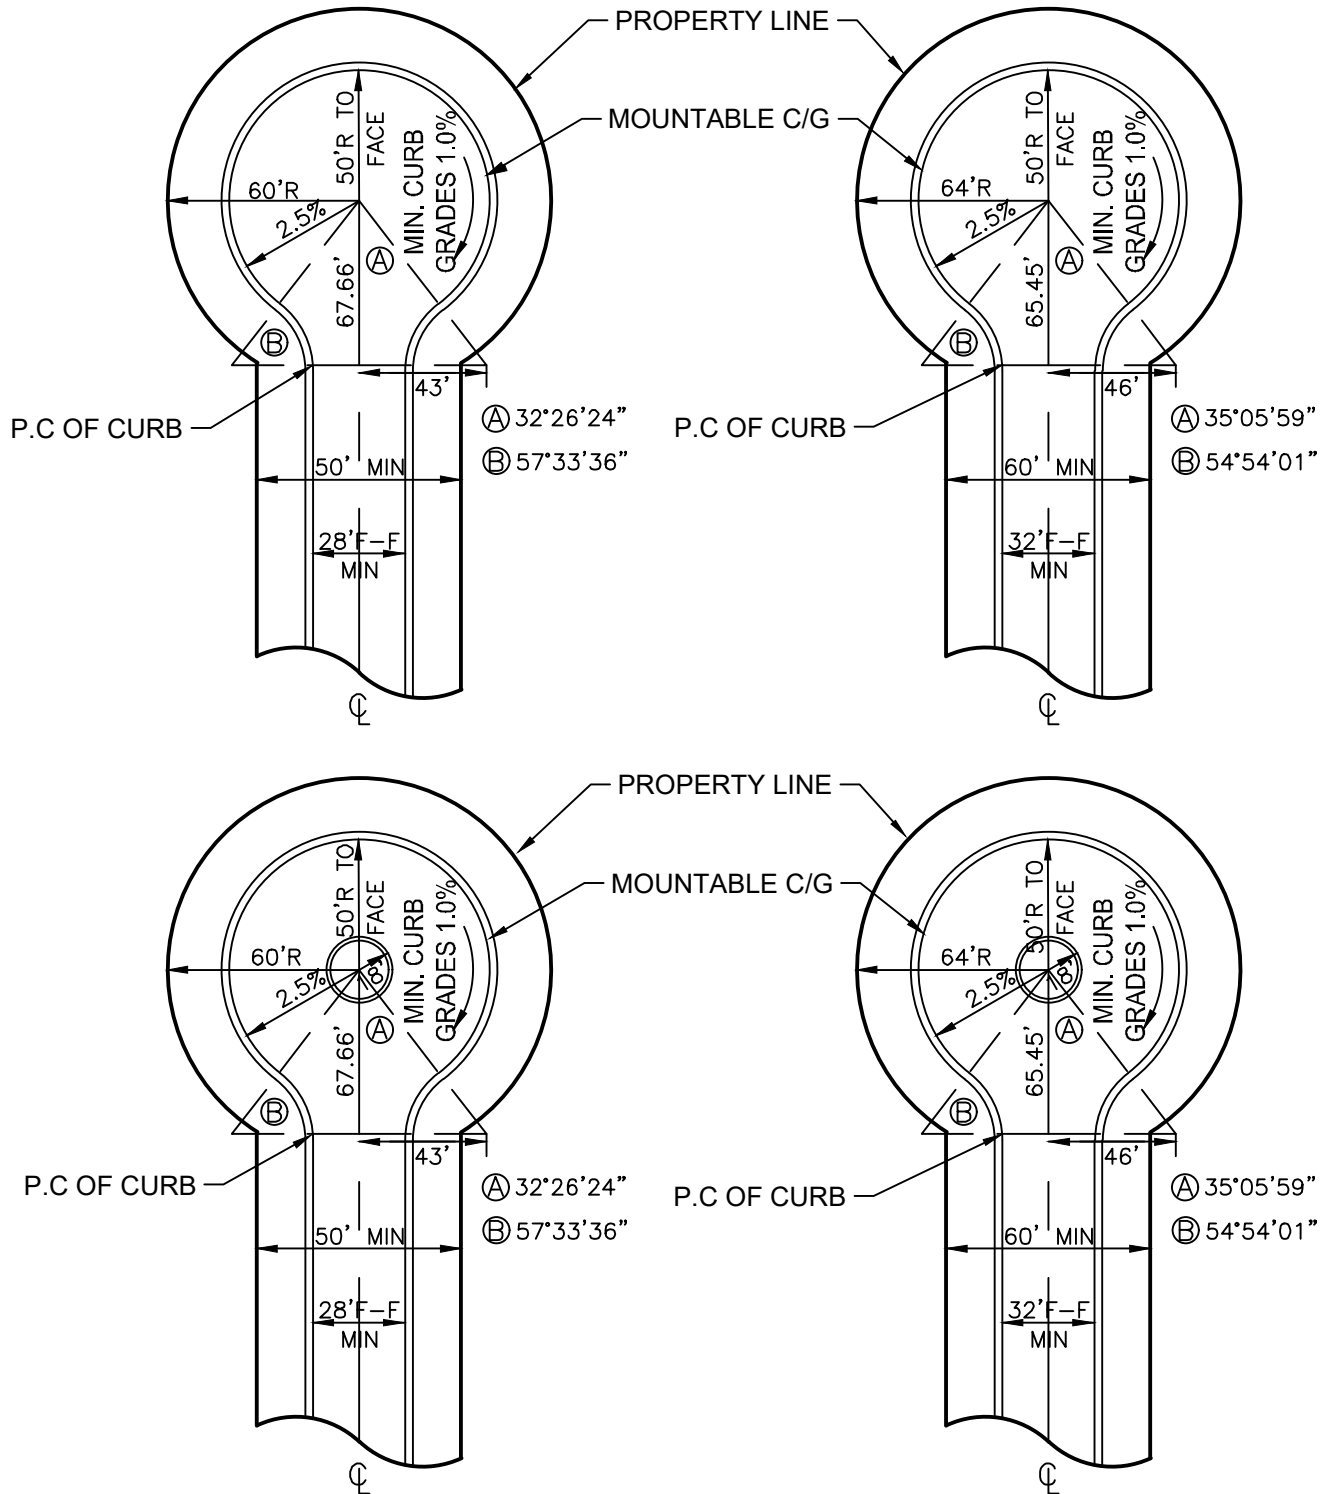

NOTES:

1. ALL RADIUS MEASUREMENTS TAKEN FROM FACE OF CURB.
2. ALL CENTER ISLAND SURFACES MUST BE APPROVED BY CITY AND PRIVATELY MAINTAINED.



2025 Standard Detail Plates

TYPICAL CUL-DE-SACS


LAST REVISION:
06/28/2024




PLATE NO.
STR-18

① ADA REQUIRED TRUNCATED DOME PER MN/DOT STD. PLATE 7036F


② ALL PEDESTRIAN RAMPS SHALL BE DESIGNED AND CONSTRUCTED TO MEET THE LATEST ADA REQUIREMENTS AND CONFORM TO THE LATEST MNDOT PED RAMP GUIDELINES

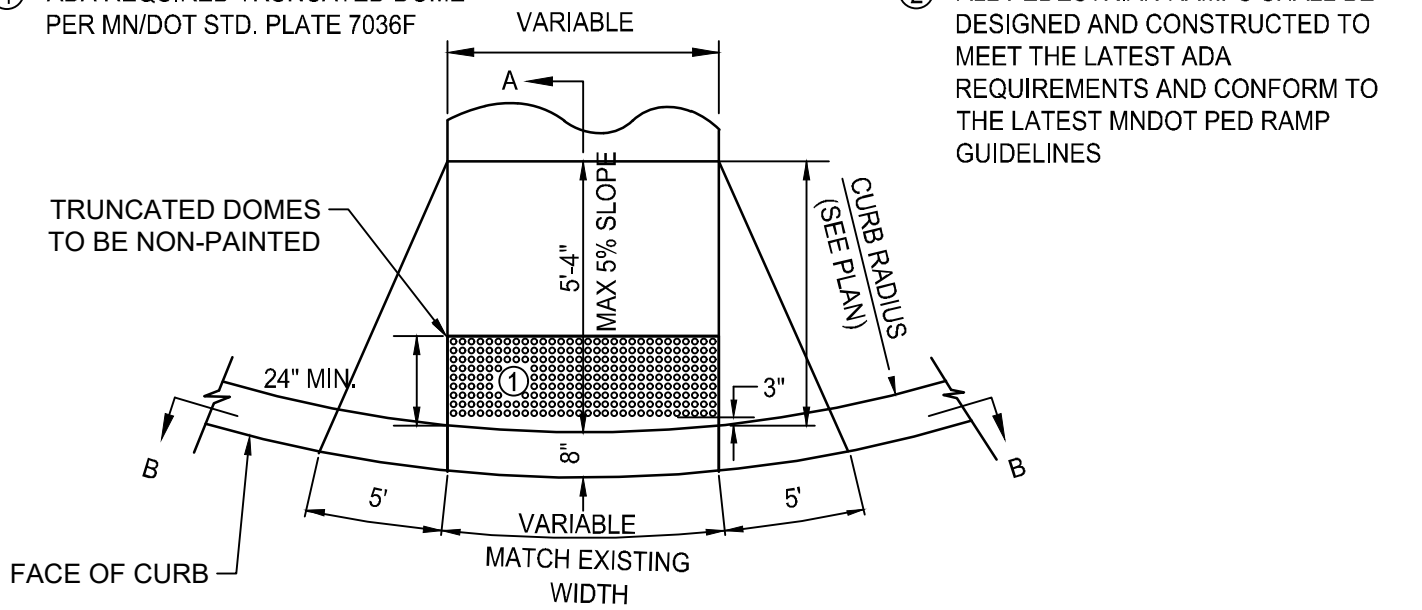

PLAN

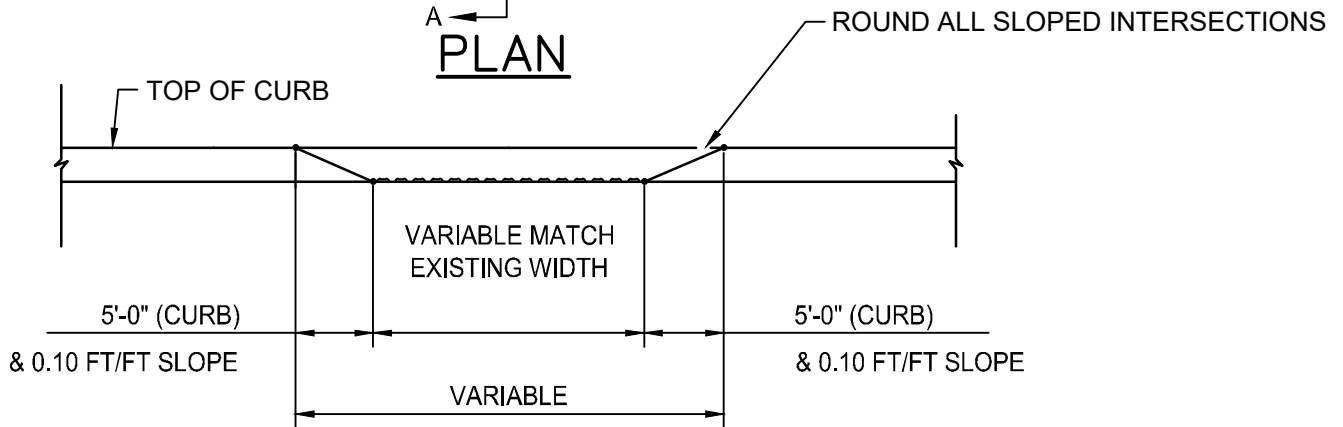

SECTION B-B

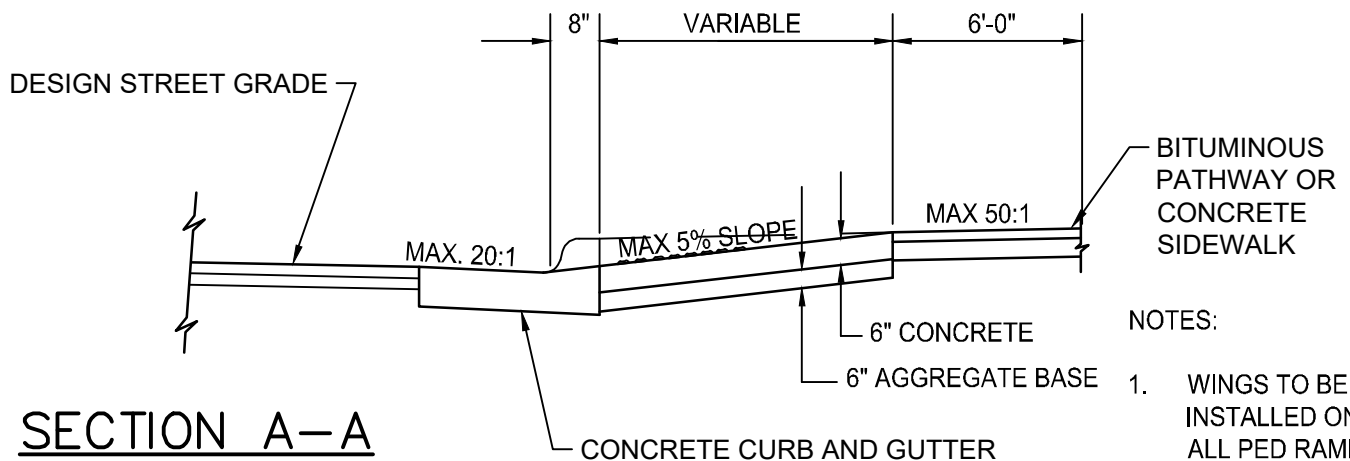

SECTION A-A

NOTES:

1. WINGS TO BE INSTALLED ON ALL PED RAMPS




2025 Standard Detail Plates

SIDEWALK CURB RAMP

LAST REVISION:
06/28/2024



PLATE NO.
STR-19

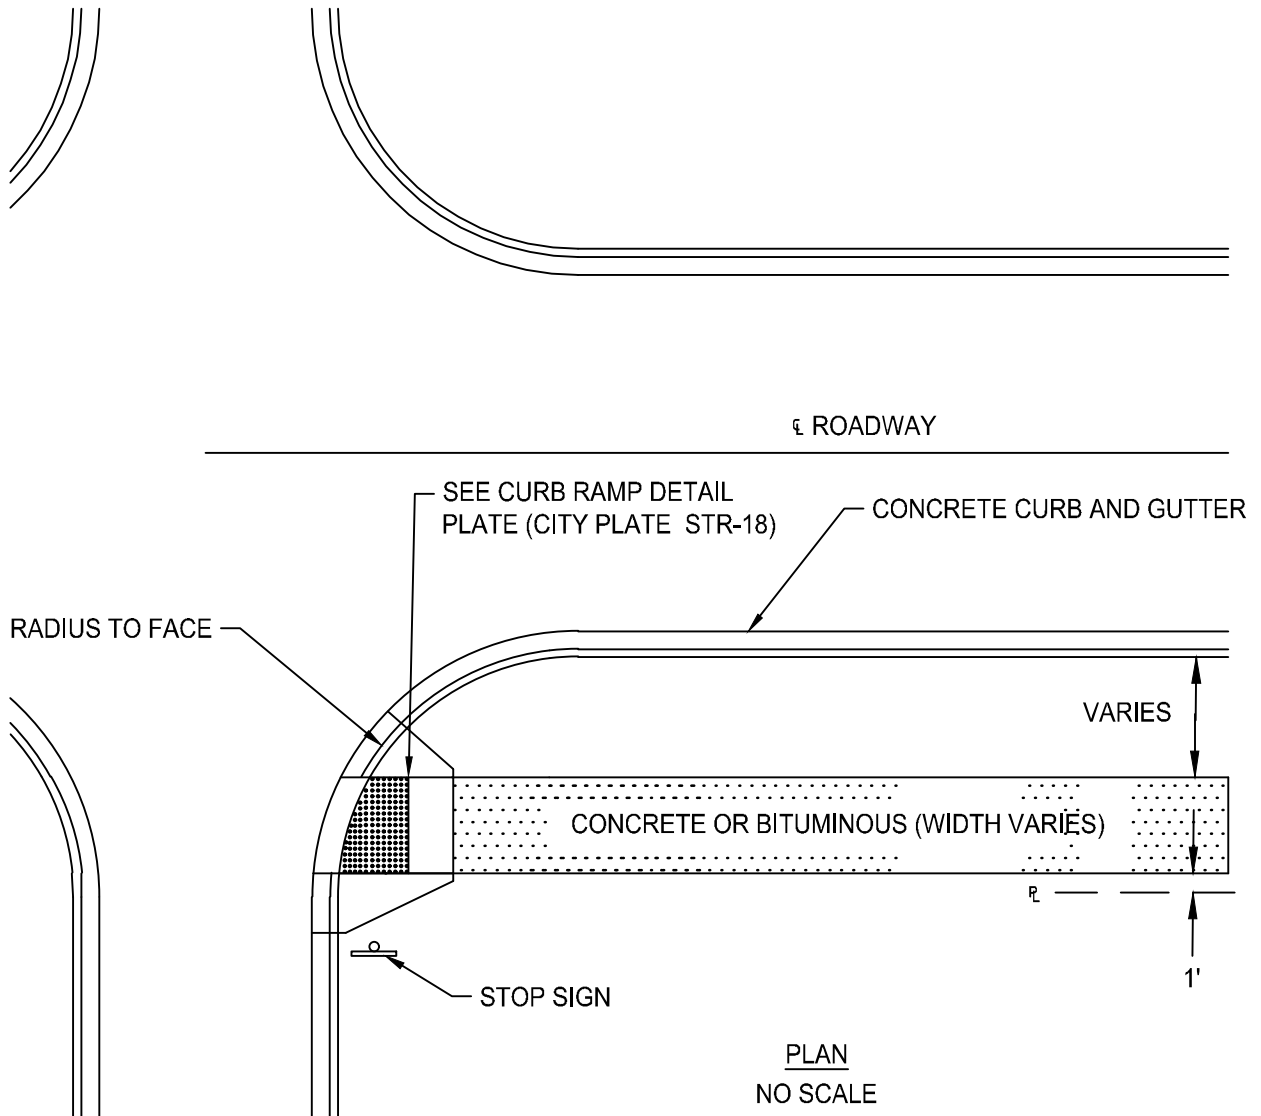

NOTE: DIMENSIONS DEPEND ON TYPE OF PATHWAY OR SIDEWALK.




2025 Standard Detail Plates

SIDEWALK & BIKE PATH CURB RAMP GENERAL LOCATION


LAST REVISION:
06/28/2024



PLATE NO.
STR-20

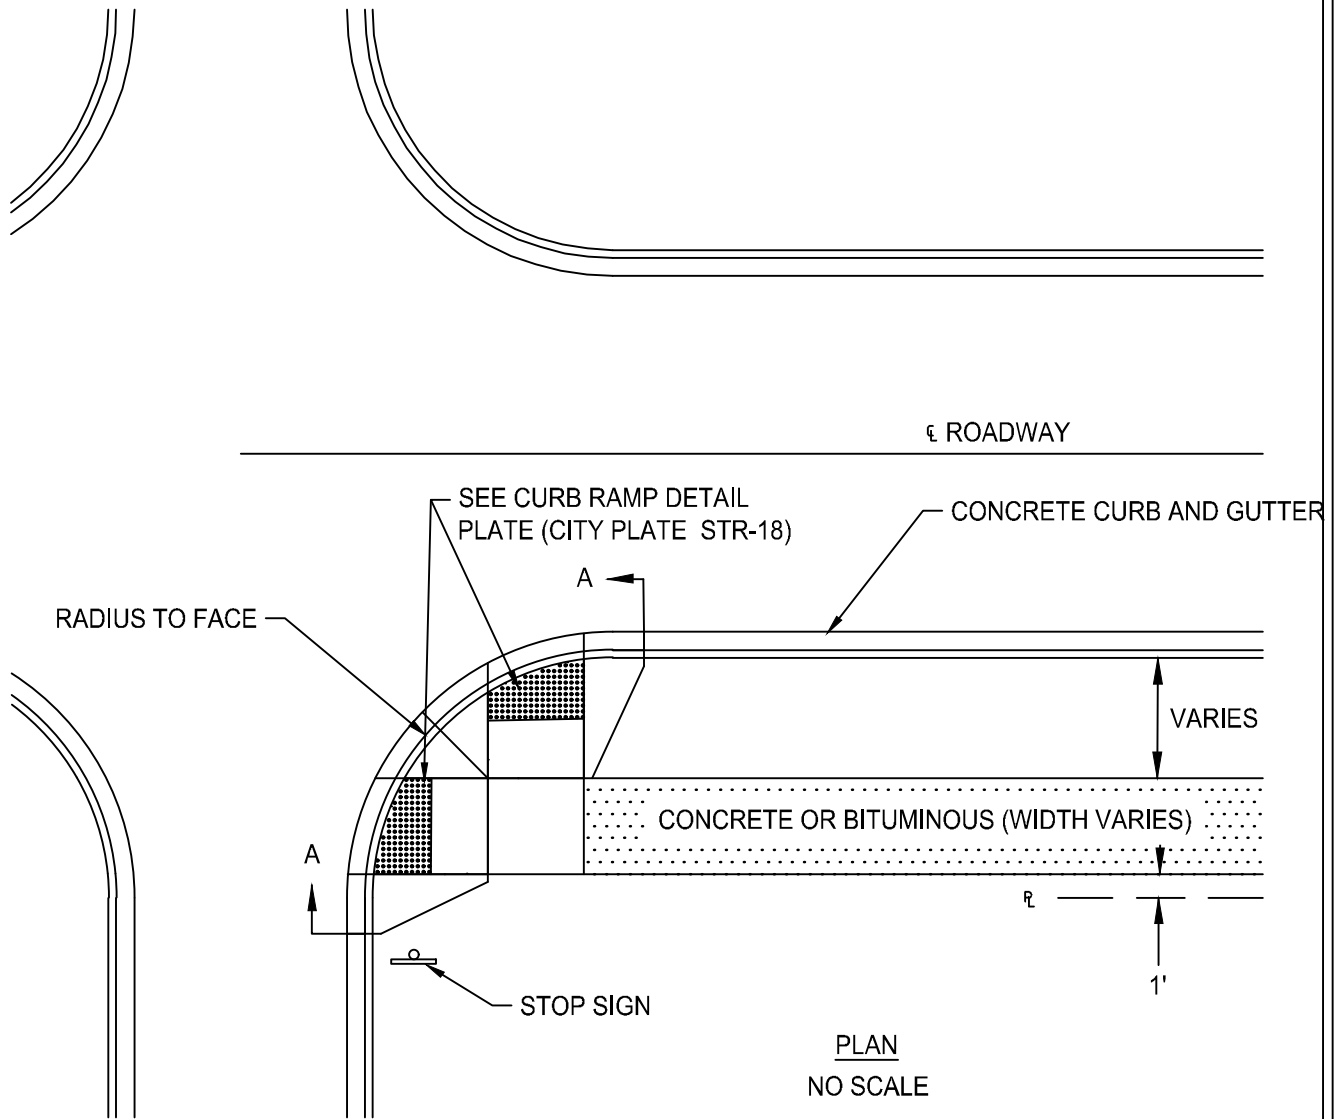

CITY ENGINEER MAY DETERMINE THAT RADIAL DOMES ARE NECESSARY IF TRANSITION DISTANCE BETWEEN TWO LANDING AREAS IS NOT SUFFICIENT OR IF DETERMINED NECESSARY BY ENGINEER.

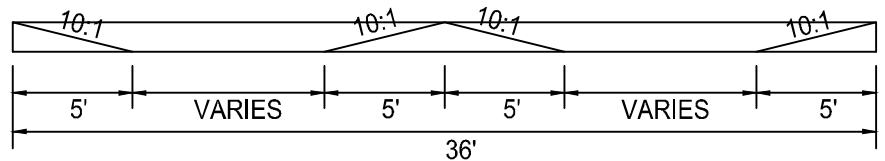

SECTION A-A
PROFILE
NO SCALE




2025 Standard Detail Plates

DOUBLE SIDEWALK & BIKE PATH CURB RAMP

LAST REVISION:
06/28/2024




PLATE NO.
STR-21

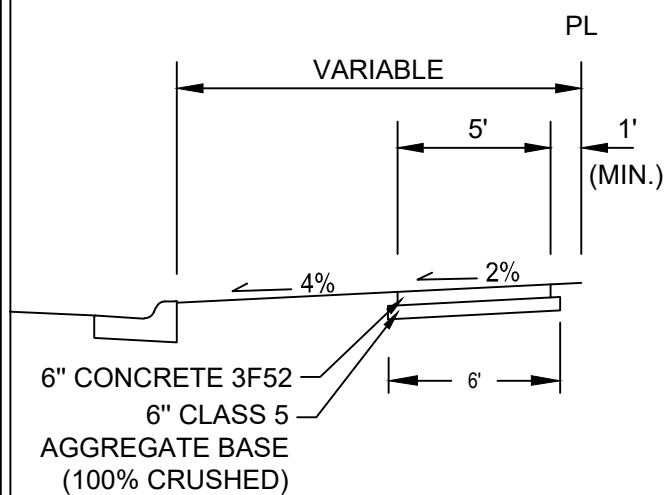


NOTE: WALK TO BE PRIVATELY MAINTAINED


NEIGHBORHOOD SIDEWALK W/BOULEVARD

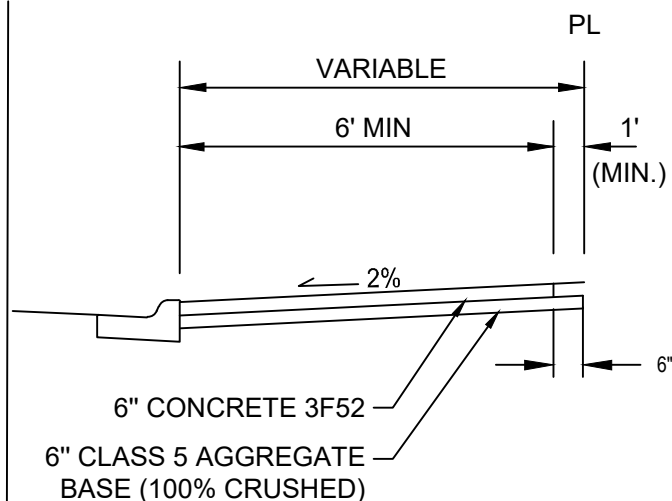

NEIGHBORHOOD SIDEWALK ADJACENT TO BACK OF CURB

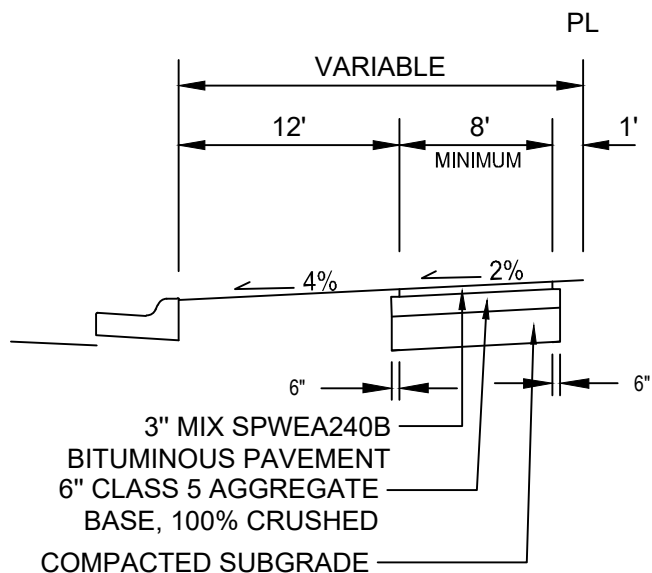

COMMUNITY ROADWAY TRAIL URBAN SECTION

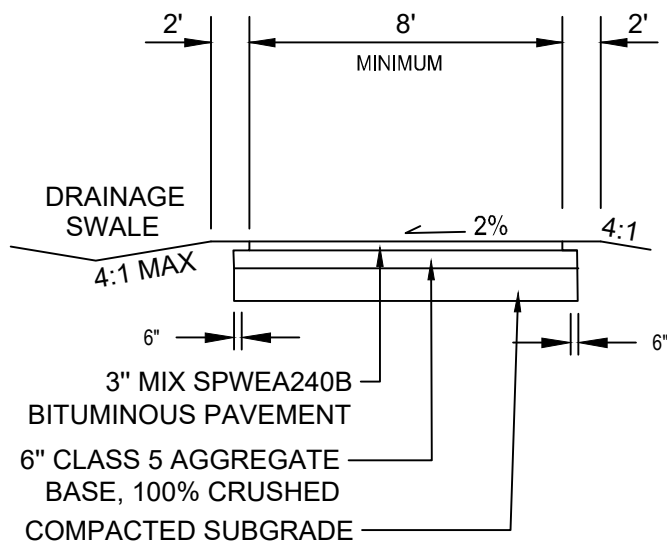

COMMUNITY GREENWAY TRAIL

*ROOT BARRIER SHALL BE INSTALLED WITH ALL TRAILS ADJACENT TO WETLANDS AND OTHERWISE AS DIRECTED BY THE CITY ENGINEER IN ACCORDANCE WITH STR-23

TRAIL WEARING COURSES MAY HAVE A MAXIMUM OF 10% RECYCLED ASPHALT PAVEMENT (RAP). NO RECYCLED ASPHALT SHINGLES (RAS) ALLOWED IN WEARING COURSES.



2025 Standard Detail Plates


CONCRETE WALKS AND BITUMINOUS TRAILS

LAST REVISION:
01/02/2025



PLATE NO.

STR-22

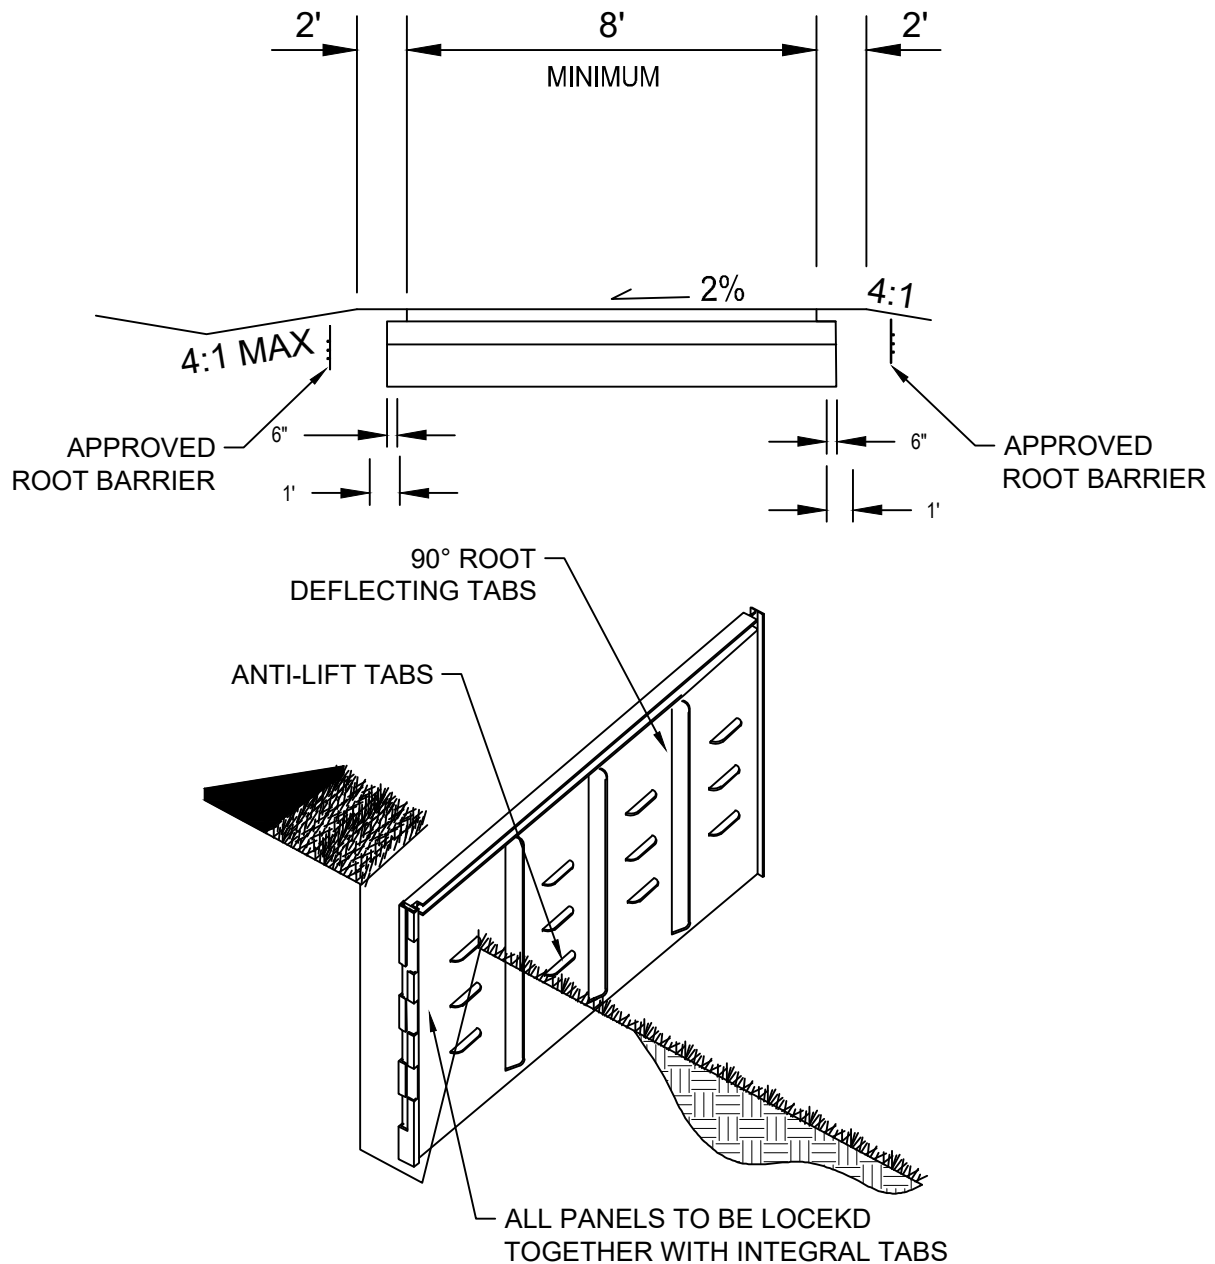

NOTES:

1. ROOT BARRIER USED SHALL BE 18" IN DEPTH, UNLESS OTHERWISE SPECIFIED IN CONTRACT. INSTALL ALONG TRAILS AS DIRECTED BY THE CITY ENGINEER.
2. ROOT BARRIERS SHALL BE PLACED SO THAT THE TOP EDGE SHALL BE LOCATED $\frac{1}{2}$ " BELOW FINISHED GRADE.
3. SIDE WITH TABS SHALL BE FACING VEGETATION.
4. INSTALL ROOT BARRIER 3' OFF EDGE OF TRAIL, TYP. PER MANUFACTURERS GUIDLINES AND CONTRACT DOCUMENTS.
5. WHEN INSTALLED ADJACENT TO EXISTING IMPROVED SURFACES, UTILIZE MEANS AND METHODS TO PROTECT THE EXISTING INFRASTRUCTURE FROM DAMAGE.
6. ROOT BARRIER SHALL BE MANUFACTURED BY DEEP ROOT PARTNERS OR APPROVED EQUAL.






2025 Standard Detail Plates

BITUMINOUS TRAIL WITH ROOT BARRIER

LAST REVISION:
01/02/2025



PLATE NO.
STR-23

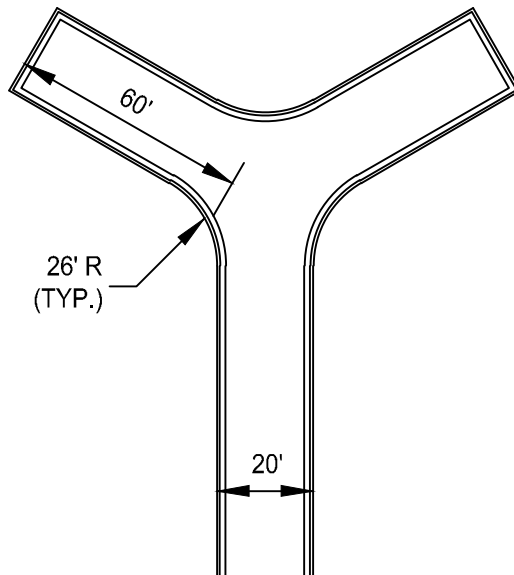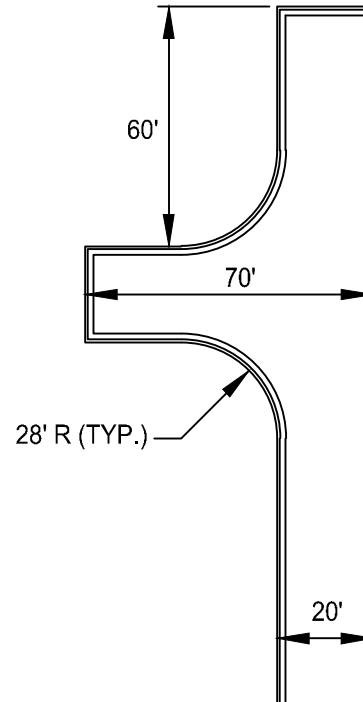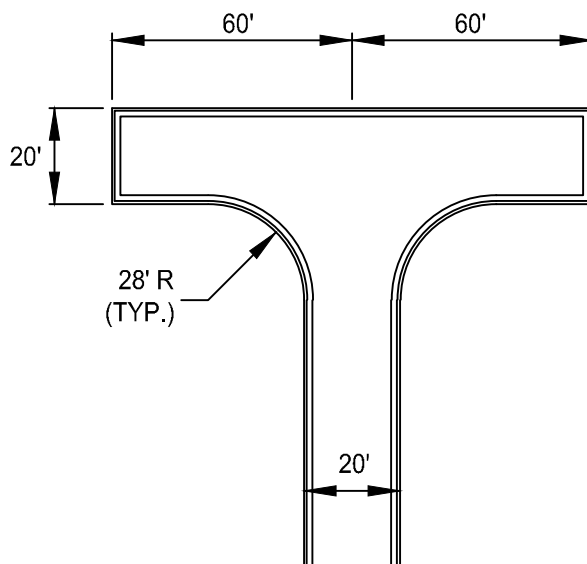

NOTES:

1. FIRE DEPARTMENT REQUIREMENTS FOR APPROVED ALTERNATE TURNAROUNDS ON FIRE DEPARTMENT ACCESS ROADS, AS REQUIRED BY MINNESOTA STATE FIRE CODE, 2015 EDITION
2. TURNAROUNDS MAY BE SUBSTITUTED FOR CUL-DE-SACS IN PRIVATE DEVELOPMENTS WITH THE CITY ENGINEER'S APPROVAL.
3. CUL-DE-SAC TO BE CONSTRUCTED WITH A 45' RADIUS (MINIMUM).




2025 Standard Detail Plates

PRIVATE DEVELOPMENT TURNAROUND

LAST REVISION:
06/28/2024




PLATE NO.
STR-24

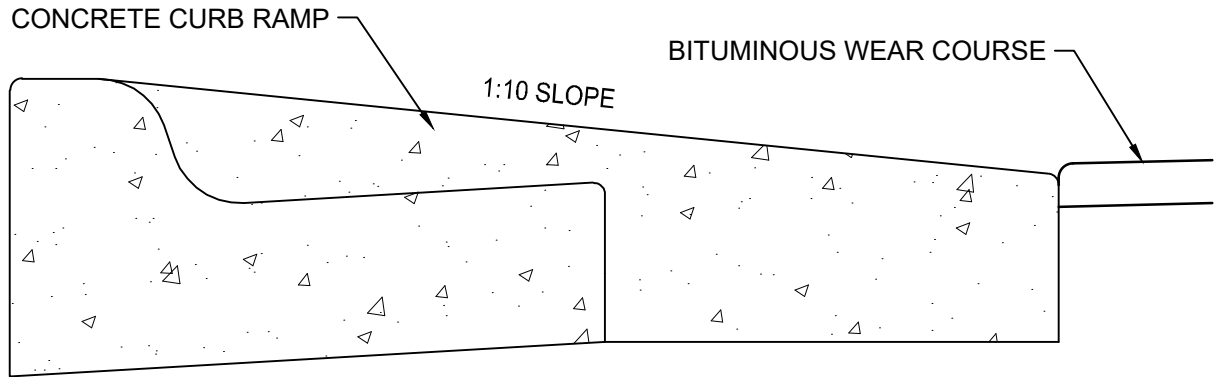


SECTION A-A

NOTES:

1. RADIUS WILL VARY BASED ON ISLAND SIZE.
2. CURB RAMP TO BE USED WHEN CENTER ISLANDS ARE PRESENT. COORDINATE WITH CITY ENGINEER.

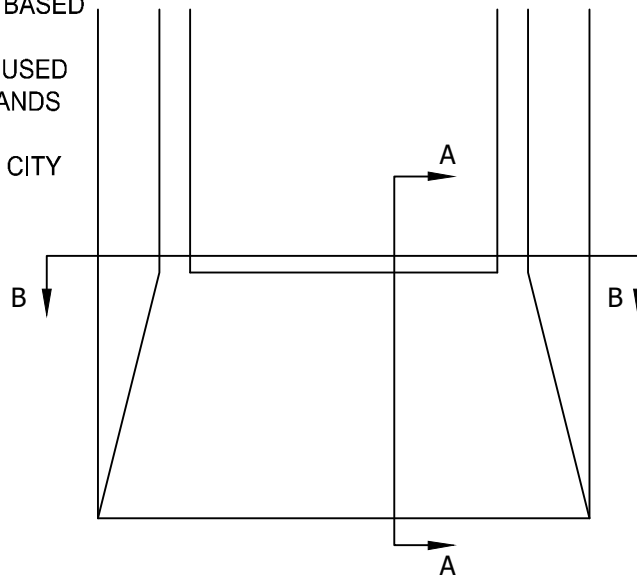

PLAN

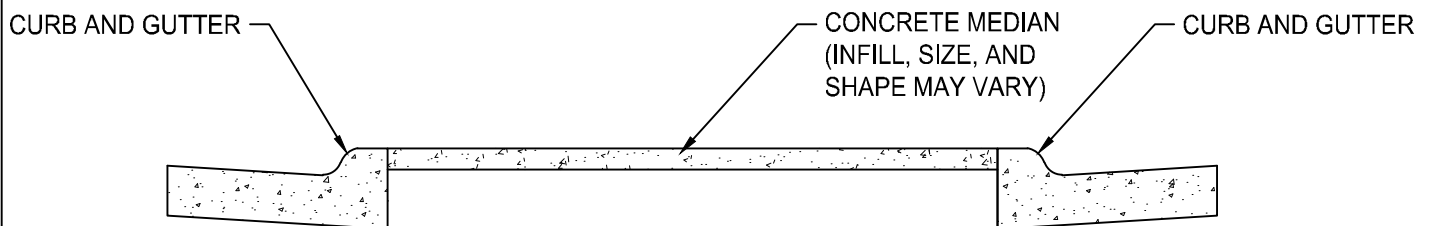

SECTION B-B




2025 Standard Detail Plates

CENTER ISLAND CURB RAMP

LAST REVISION:
06/28/2024



PLATE NO.
STR-25

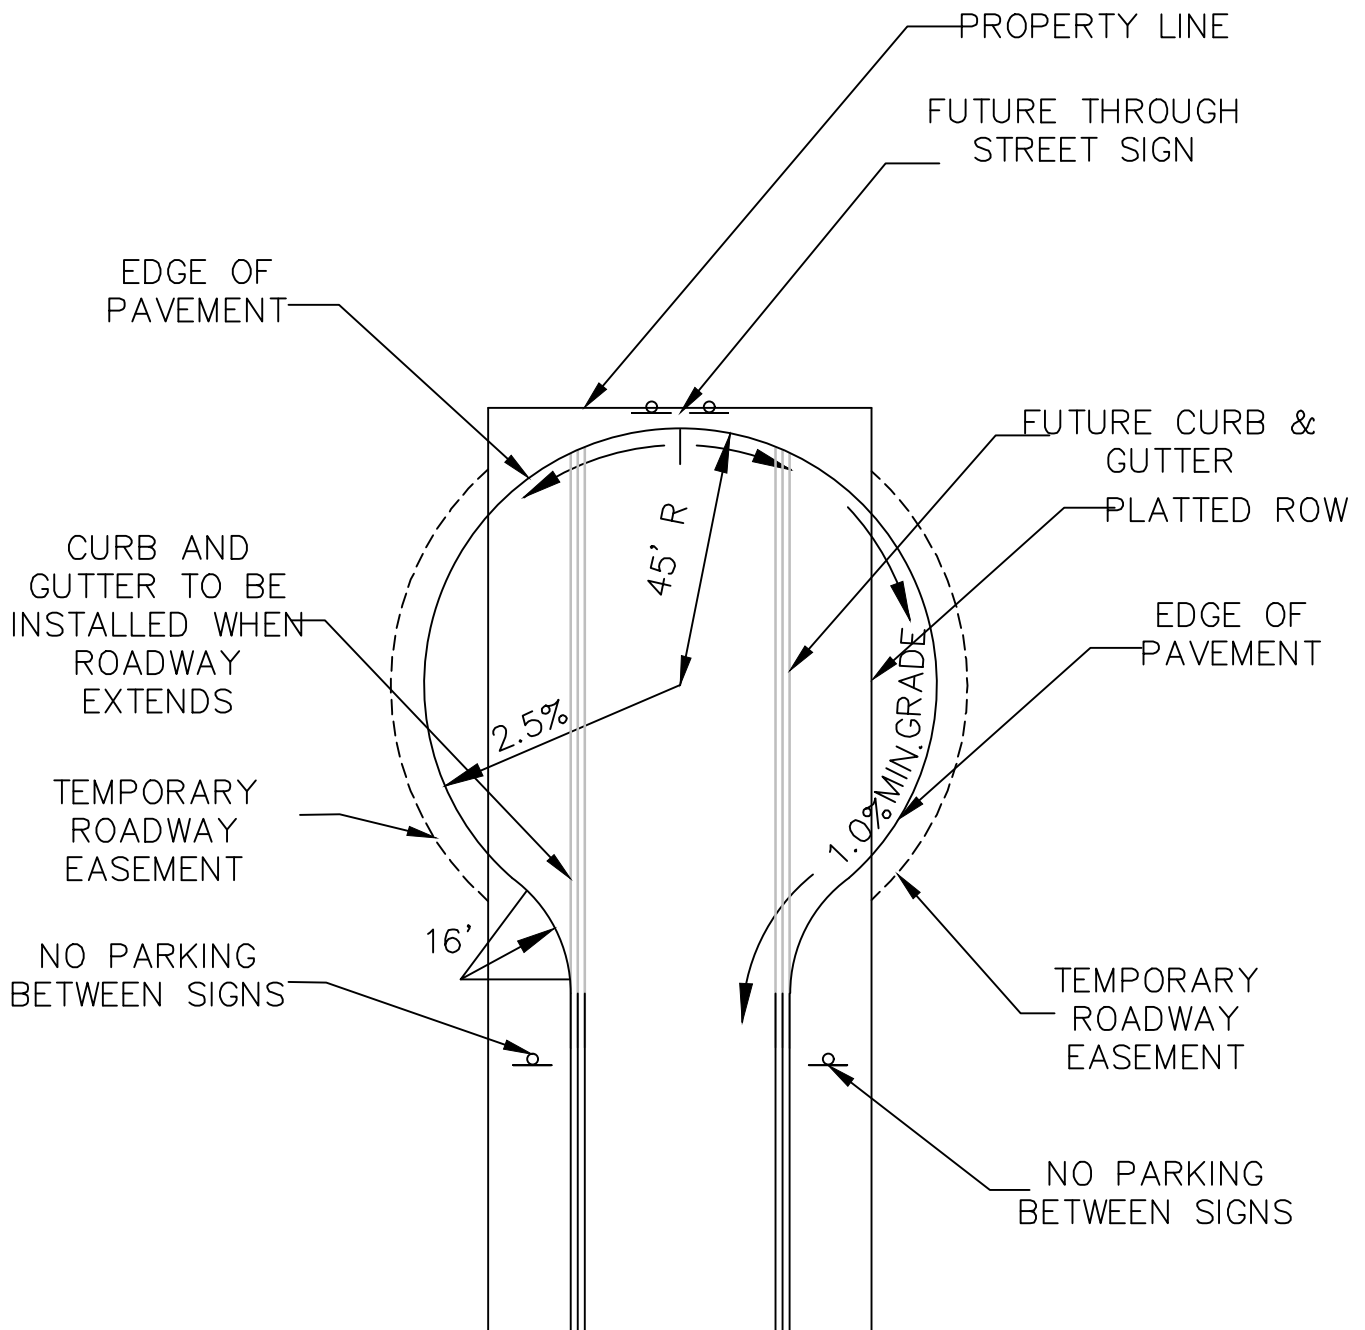

NOTE:

1. ALL RADIUS MEASUREMENTS TAKEN FROM FACE OF CURB.
2. NO BUILDING PERMIT WILL BE ALLOWED UNTIL TEMPORARY TURNAROUND IS INSTALLED



2025 Standard Detail Plates

TEMPORARY CUL-DE-SAC

LAST REVISION:
06/28/2024



PLATE NO.
STR-26

Larch Ln

SINGLE-FACED STREET SIGN PANELS WITH
SPACING
INSTALL SIGNS ON SAME POST AS STOP
WHERE APPLICABLE

2" X 2" X 12 GAUGE SQUARE TELESPAR
GALVANIZED SIGN POST (2.4 lbs/ft)

SURFACE MOUNTED ANCHOR BASE
 $\frac{1}{2}$ " X 4" CONCRETE ANCHOR BOLTS
KLEEN BREAK MODEL 425 OR
APPROVED EQUAL

FINISHED GRADE

6" CONCRETE WALK

6" C U/C & L/C HIGH INTENSITY
PRISMATIC WHITE COPY AND $\frac{3}{8}$ " BORDER
ON HIGH INTENSITY PRISMATIC GREEN
BACKGROUND

1-1/2" RADIUS CORNERS

2 EACH $\frac{3}{8}$ " HOLES ON 7" CENTERS

$\frac{3}{8}$ " HOLE EACH END IN 1" FROM EDGE
TO CENTER OF HOLE

SINGLE FACED

MAXIMUM LENGTH OF 42"

24"x9" 500-01396
30"x9" 500-01573
36"x9" 500-01750
42"x9" 500-01923

NOTE:

1. INSTALLATION SHALL BE IN COMPLIANCE WITH THE LATEST VERSION OF THE MINNESOTA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
2. FOR STREETS WITH SPEED LIMIT GREATER THAN 30 MPH, A 0.75' SIGN WITH 0.5' LETTERS IS REQUIRED.
3. TYPICALLY INSTALLED AT SOUTHWEST CORNER OF INTERSECTION. ALL EQUALS MUST BE APPROVED BY CITY ENGINEER BEFORE INSTALLATION.
4. SIGN SHALL BE CONSTRUCTED OF ALUMINUM PER MNDOT 3352.2A1.



2025 Standard Detail Plates

STREET SIGN DETAIL - CONCRETE

LAST REVISION:
06/28/2024



PLATE NO.
STR-27

Larch Ln

(2) - SINGLE-FACED STREET SIGN PANELS WITH SPACERS
INSTALL SIGNS ON SAME POST AS STOP SIGN WHERE APPLICABLE

2" X 2" X 12 GAUGE SQUARE TELES PAR
GALVANIZED SIGN POST (2.4 lbs/ft)

6" C U/C & L/C HIGH INTENSITY
PRISMATIC WHITE COPY AND $\frac{3}{8}$ " BORDER
ON HIGH INTENSITY PRISMATIC GREEN
BACKGROUND

1-1/2" RADIUS CORNERS

2 EACH $\frac{3}{8}$ " HOLES ON 7" CENTERS

$\frac{3}{8}$ " HOLE EACH END IN 1" FROM EDGE
TO CENTER OF HOLE

SINGLE FACED

MAXIMUM LENGTH OF 42"

1" TO 2"

6" TO 8"

FINISHED GRADE

24"x9" 500-01396
30"x9" 500-01573
36"x9" 500-01750
42"x9" 500-01923

2 $\frac{1}{4}$ " X 2 $\frac{1}{4}$ " X 12 GAUGE SQUARE TELES PAR
4' LONG SIGN ANCHOR

2 $\frac{1}{2}$ " X 2 $\frac{1}{2}$ " X 18" X 12 GAUGE OMNI
DIRECTIONAL SLEEVE WITH 4
BLADES

NOTE:

1. INSTALLATION SHALL BE IN COMPLIANCE WITH THE LATEST VERSION OF THE MINNESOTA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
2. FOR STREETS WITH SPEED LIMIT GREATER THAN 30 MPH, A 0.75' SIGN WITH 0.5' LETTERS IS REQUIRED.
3. TYPICALLY INSTALLED AT SOUTHWEST CORNER OF INTERSECTION. ALL EQUALS MUST BE APPROVED BY CITY ENGINEER BEFORE INSTALLATION.
4. SIGN SHALL BE CONSTRUCTED OF ALUMINUM PER MNDOT 3352.2A1.



2025 Standard Detail Plates


STREET SIGN DETAIL - BOULEVARD

LAST REVISION:
06/28/2024



PLATE NO.
STR-28

SIGN NAME	DESIGNATION	SIZE
STOP	R1-1	30"X30"
YIELD	R1-2	36"X36"X36"
SPEED LIMIT	R2-1	24"X30"

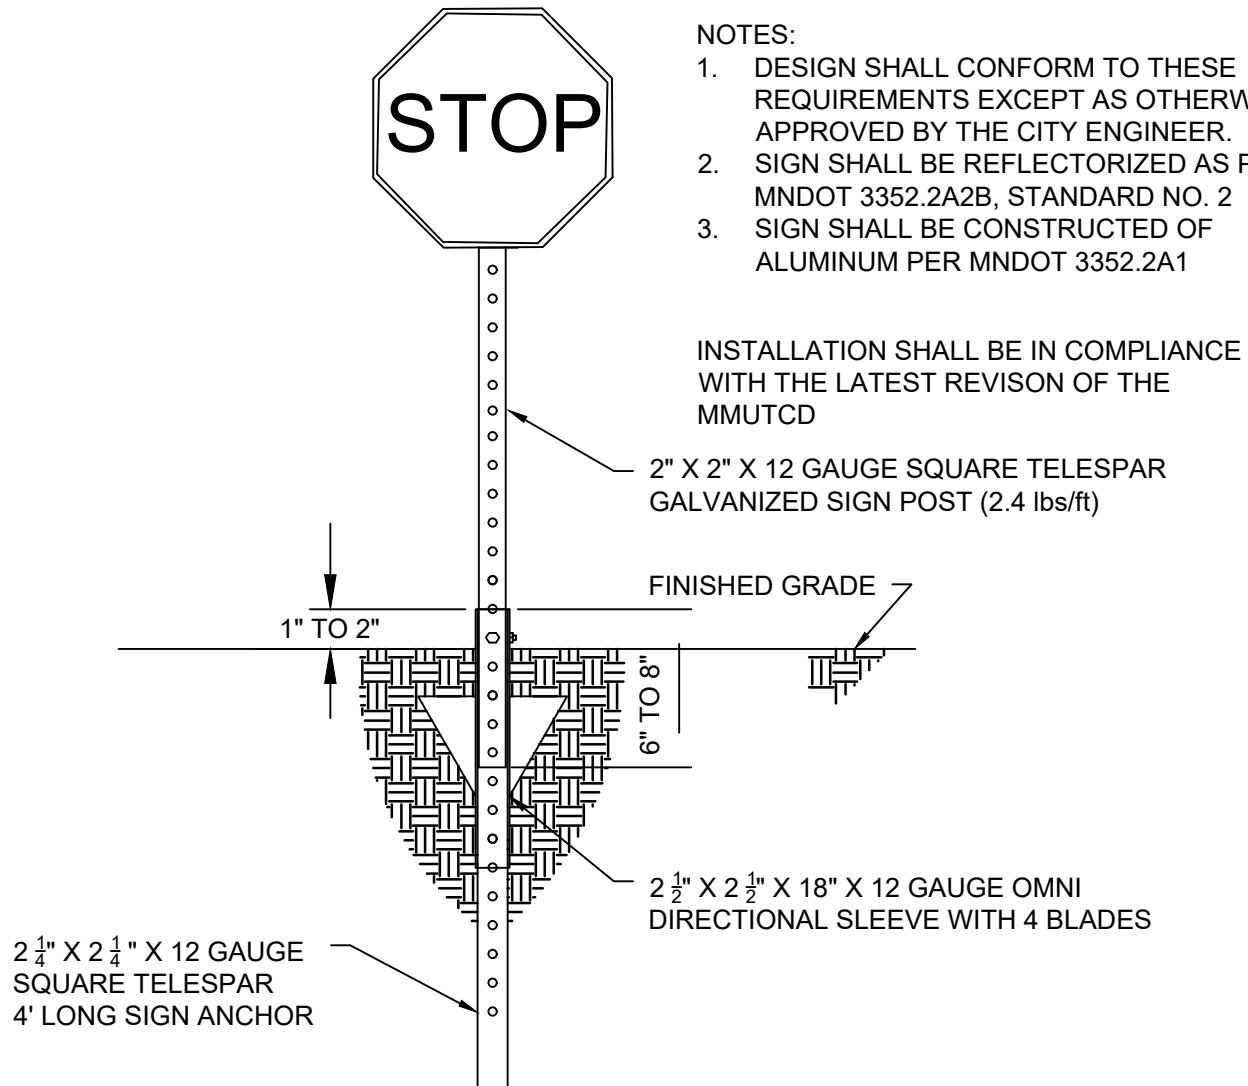

NOTES:

1. DESIGN SHALL CONFORM TO THESE REQUIREMENTS EXCEPT AS OTHERWISE APPROVED BY THE CITY ENGINEER.
2. SIGN SHALL BE REFLECTORIZED AS PER MNDOT 3352.2A2B, STANDARD NO. 2
3. SIGN SHALL BE CONSTRUCTED OF ALUMINUM PER MNDOT 3352.2A1

INSTALLATION SHALL BE IN COMPLIANCE WITH THE LATEST REVISION OF THE MMUTCD

NOTE:

1. INSTALLATION SHALL BE IN COMPLIANCE WITH THE LATEST VERSION OF THE MINNESOTA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
2. FOR STREETS WITH SPEED LIMIT GREATER THAN 30 MPH, A 0.75' SIGN WITH 0.5' LETTERS IS REQUIRED.
3. TYPICALLY INSTALLED AT SOUTHWEST CORNER OF INTERSECTION. ALL EQUALS MUST BE APPROVED BY CITY ENGINEER BEFORE INSTALLATION.
4. SIGN SHALL BE CONSTRUCTED OF ALUMINUM PER MNDOT 3352.2A1.
5. WHEN INSTALLED IN CONCRETE USE SURFACE MOUNTED ANCHOR BASE 1/2"x4" CONCRETE ANCHOR BOLTS KLEEN BREAK MODEL 425 OR APPROVED EQUAL. (SEE DETAIL GEN-3)




2025 Standard Detail Plates

REGULATORY SIGN

LAST REVISION:
06/28/2024



PLATE NO.
STR-29

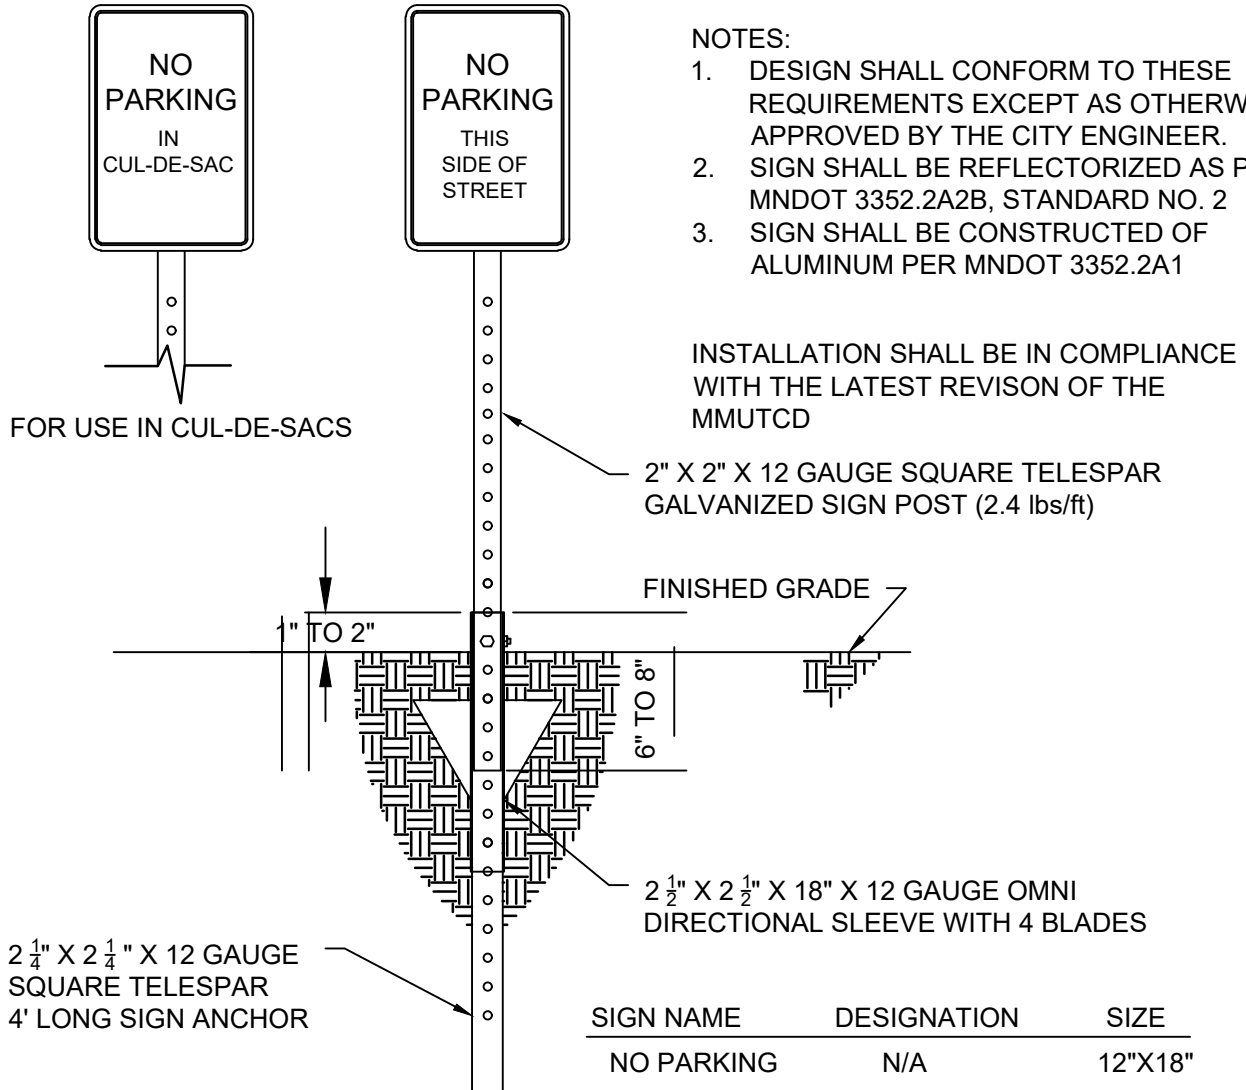

NOTES:

1. DESIGN SHALL CONFORM TO THESE REQUIREMENTS EXCEPT AS OTHERWISE APPROVED BY THE CITY ENGINEER.
2. SIGN SHALL BE REFLECTORIZED AS PER MNDOT 3352.2A2B, STANDARD NO. 2
3. SIGN SHALL BE CONSTRUCTED OF ALUMINUM PER MNDOT 3352.2A1

NOTE:

1. INSTALLATION SHALL BE IN COMPLIANCE WITH THE LATEST VERSION OF THE MINNESOTA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
2. FOR STREETS WITH SPEED LIMIT GREATER THAN 30 MPH, A 0.75' SIGN WITH 0.5' LETTERS IS REQUIRED.
3. NO PARKING SIGNS TO BE INSTALLED PER APPROVED SIGNAGE PLAN.
4. SIGN SHALL BE CONSTRUCTED OF ALUMINUM PER MNDOT 3352.2A1.
5. WHEN INSTALLED IN CONCRETE USE SURFACE MOUNTED ANCHOR BASE 1/2"x4" CONCRETE ANCHOR BOLTS KLEEN BREAK MODEL 425 OR APPROVED EQUAL. (SEE DETAIL STR-26)
6. ALL NO PARKING SIGNS TO BE INSTALLED BACK-TO-BACK.




2025 Standard Detail Plates

NO PARKING SIGNS

LAST REVISION:
06/28/2024



PLATE NO.
STR-30

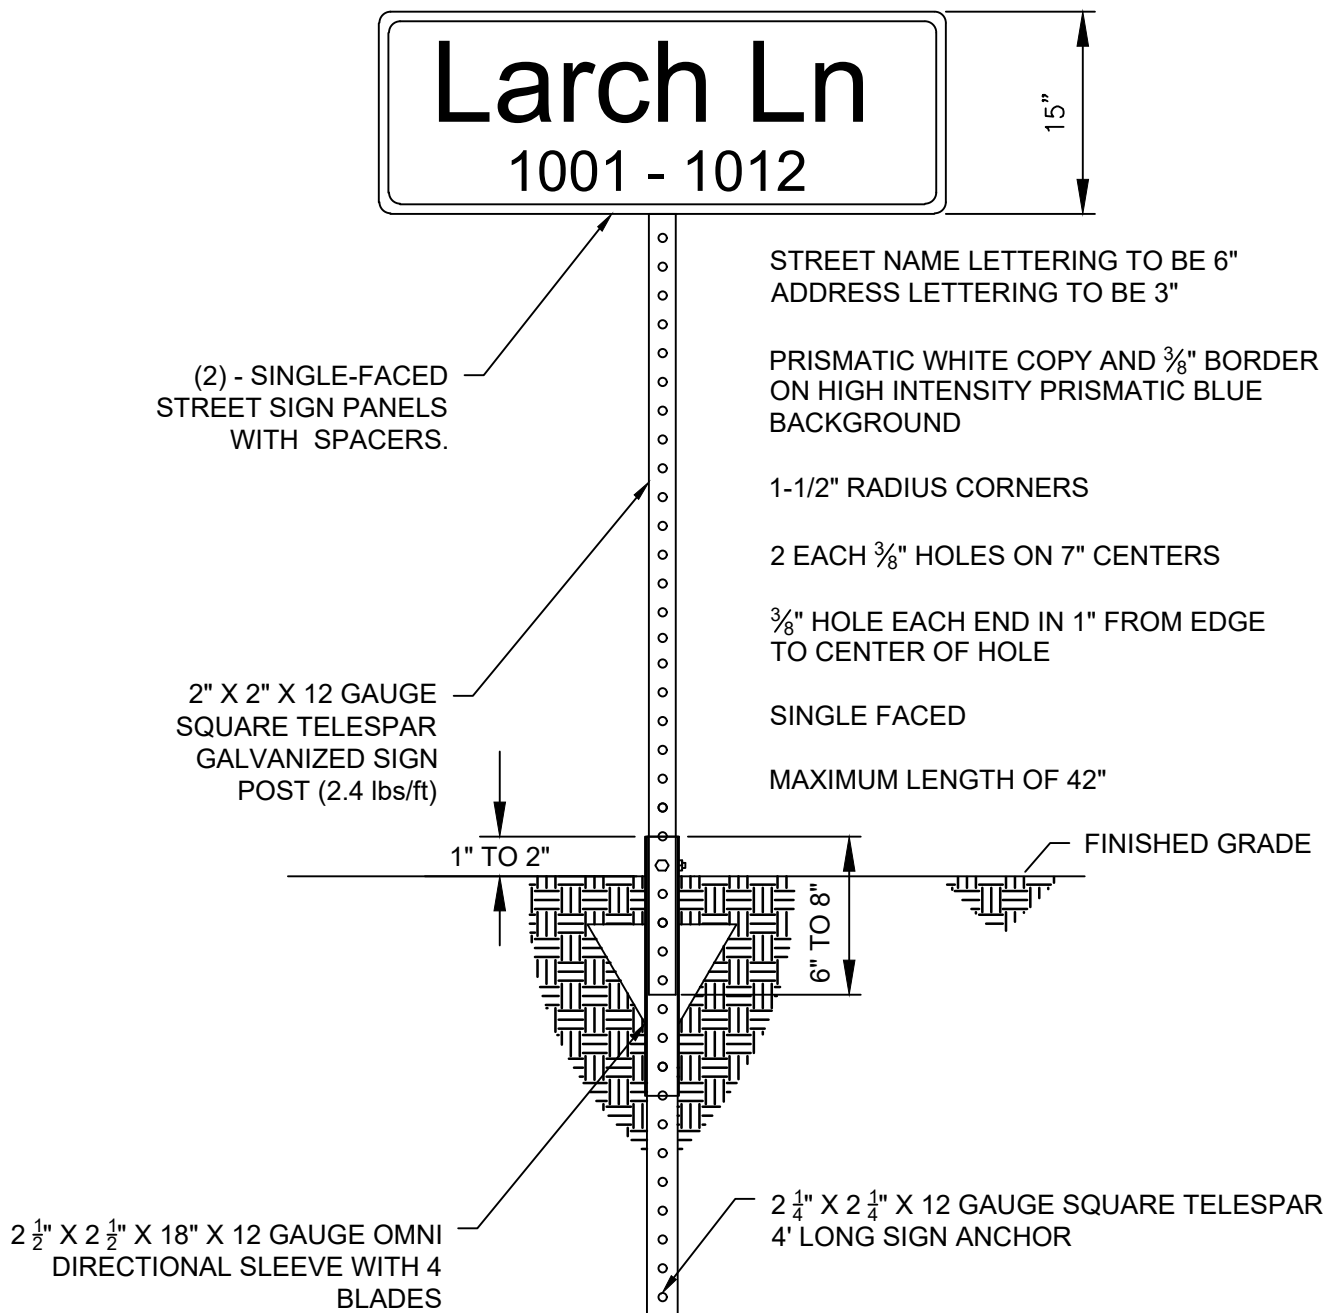

NOTE:

1. INSTALLATION SHALL BE IN COMPLIANCE WITH THE LATEST VERSION OF THE MINNESOTA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
2. SIGNS SHALL BE CONSTRUCTED OF ALUMINUM PER MNDOT 3352.2A1.



2025 Standard Detail Plates

PRIVATE DRIVE SIGN - RESIDENTIAL

LAST REVISION:
06/28/2024



PLATE NO.
STR-31

PRIVATE DRIVE

6" C U/C & L/C HIGH INTENSITY
PRISMATIC WHITE COPY AND $\frac{3}{8}$ " BORDER
ON HIGH INTENSITY PRISMATIC BLUE
BACKGROUND

1-1/2" RADIUS CORNERS

2 EACH $\frac{3}{8}$ " HOLES ON 7" CENTERS

$\frac{3}{8}$ " HOLE EACH END IN 1" FROM EDGE
TO CENTER OF HOLE

SINGLE FACED

MAXIMUM LENGTH OF 42"

(2) - SINGLE-FACED
STREET SIGN PANELS
WITH SPACERS

OR
RANGE
WHEN >10

10001 →
10012
MAIN ST

10001
10002
10003
MAIN ST

2" X 2" X 12 GAUGE SQUARE TELES PAR
GALVANIZED SIGN POST (2.4 lbs/ft)

FINISHED GRADE

1" TO 2"

6" TO 8"

2 $\frac{1}{4}$ " X 2 $\frac{1}{4}$ " X 12 GAUGE SQUARE TELES PAR
4' LONG SIGN ANCHOR

24"x9" 500-01396
30"x9" 500-01573
36"x9" 500-01750
42"x9" 500-01923

OPTIONAL: 2 $\frac{1}{2}$ " X 2 $\frac{1}{2}$ " X 18" X 12
GAUGE OMNI
DIRECTIONAL SLEEVE WITH 4
BLADES

NOTE:

1. INSTALLATION SHALL BE IN COMPLIANCE WITH THE LATEST VERSION OF THE MINNESOTA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
2. FOR STREETS WITH SPEED LIMIT GREATER THAN 30 MPH, A 0.75' SIGN WITH 0.5' LETTERS IS REQUIRED.
3. SIGNS SHALL BE CONSTRUCTED OF ALUMINUM PER MNDOT 3352.2A1.



2025 Standard Detail Plates


PRIVATE DRIVE SIGN - RURAL

LAST REVISION:
06/28/2024



PLATE NO.
STR-32

NOTE: BARRICADE AS PER CORCORAN
STANDARD DETAIL PLATE GEN-6

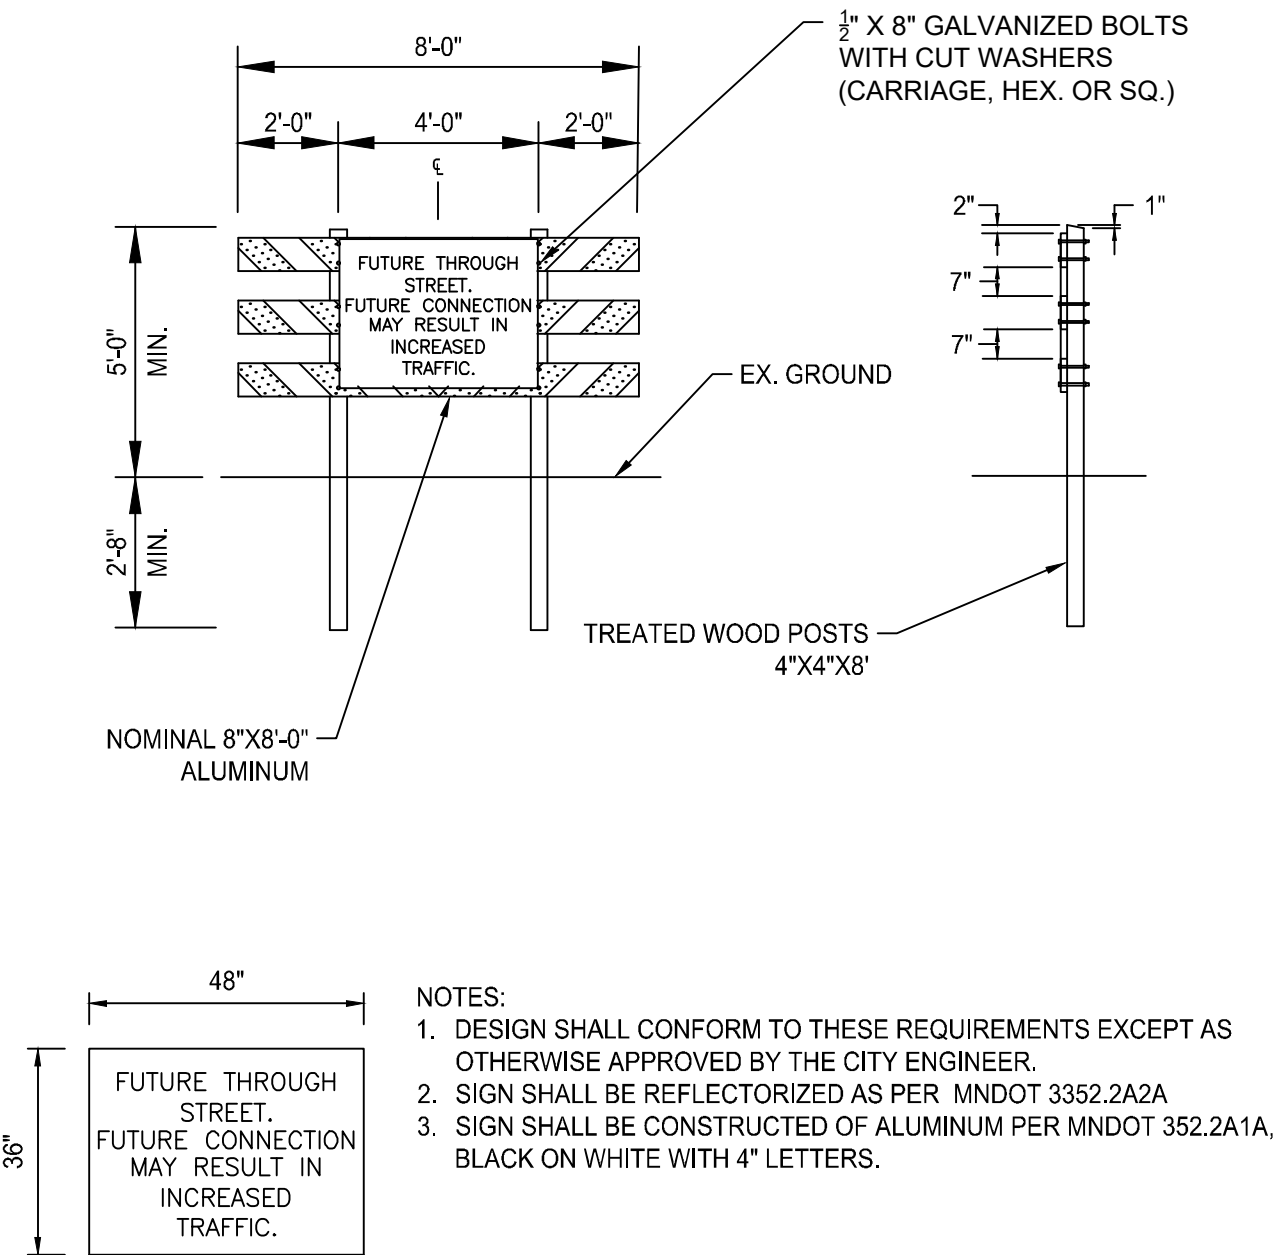

2025 Standard Detail Plates


FUTURE THROUGH STREET SIGN

LAST REVISION:
06/28/2024



PLATE NO.

STR-33

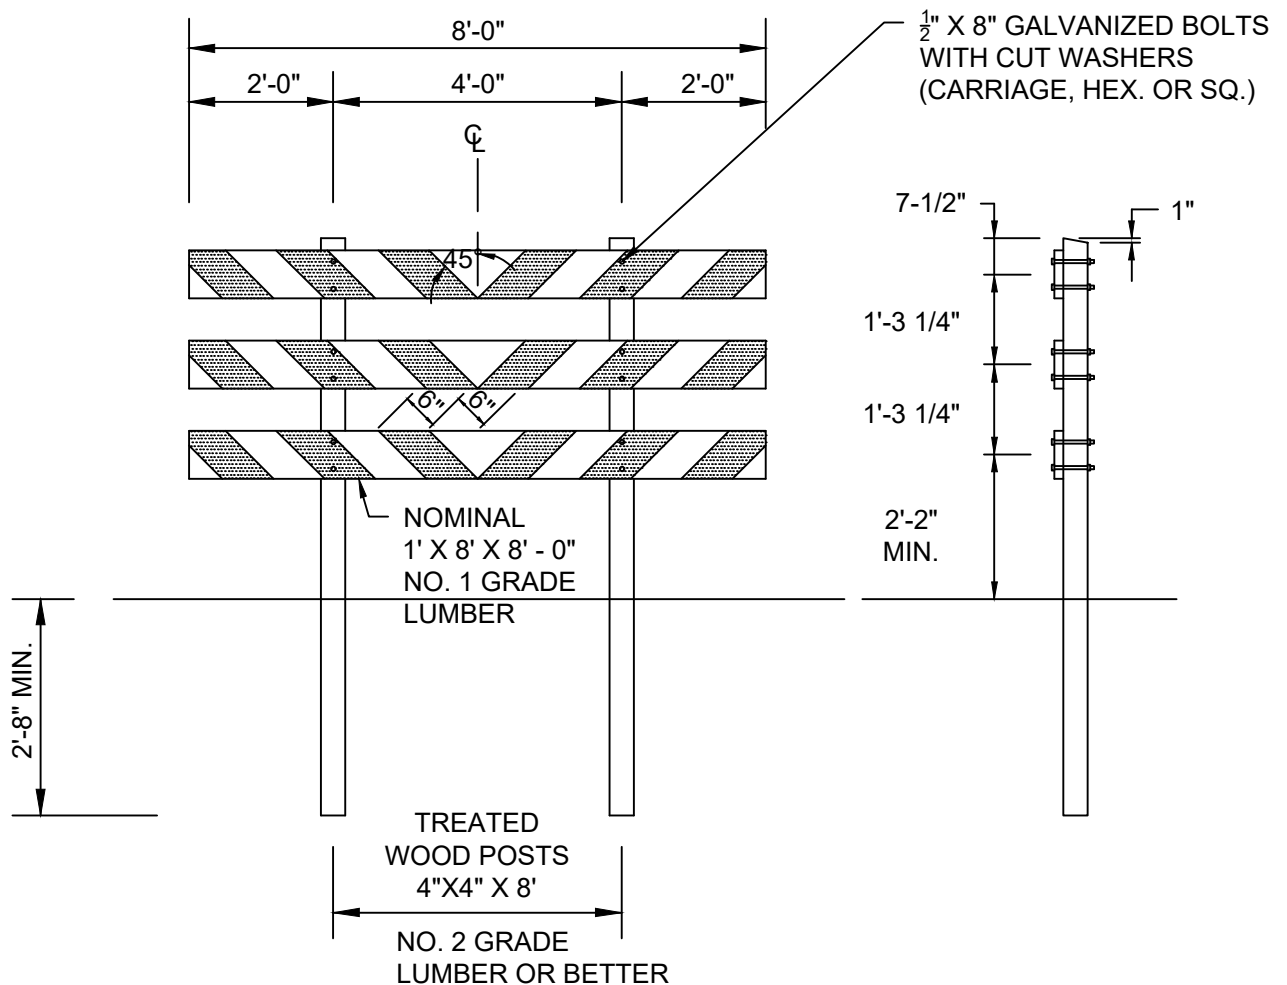

NOTE

THE BARRICADE BOARD FACE SURFACES SHALL BE FULLY REFLECTORIZED IN ALTERNATE SILVER-WHITE AND RED STRIPING, USING A REFLECTIVE SHEETING CONFORMING TO THE REQUIREMENTS OF SPEC. 3352.2A2B, STANDARD NO. 2.

PRIOR TO INSTALLING THE REFLECTIVE SHEETING, THE BARRICADE BOARDS SHALL BE GIVEN A COMPLETE COATING OF WHITE WOOD PRIMER PAINT FOLLOWED BY A SECOND COAT OF WHITE EXTERIOR APPLIED ONLY TO THE SURFACES NOT COVERED WITH REFLECTIVE SHEETING.

THE BARRICADE BOARDS SHALL BE COMPLETELY PAINTED AND REFLECTORIZED SHEETING APPLIED BEFORE BEING INSTALLED ON THE POSTS.

THE PLACEMENT OF THE BARRICADE SHALL BE 10'-0" FROM THE END OF THE BITUMINOUS ROAD WITH THE BARRICADE CENTERED ON THE ROADWAY FACING THE FLOW OF TRAFFIC.




2025 Standard Detail Plates

PERMANENT BARRICADE

LAST REVISION:
06/28/2024



PLATE NO.
STR-34

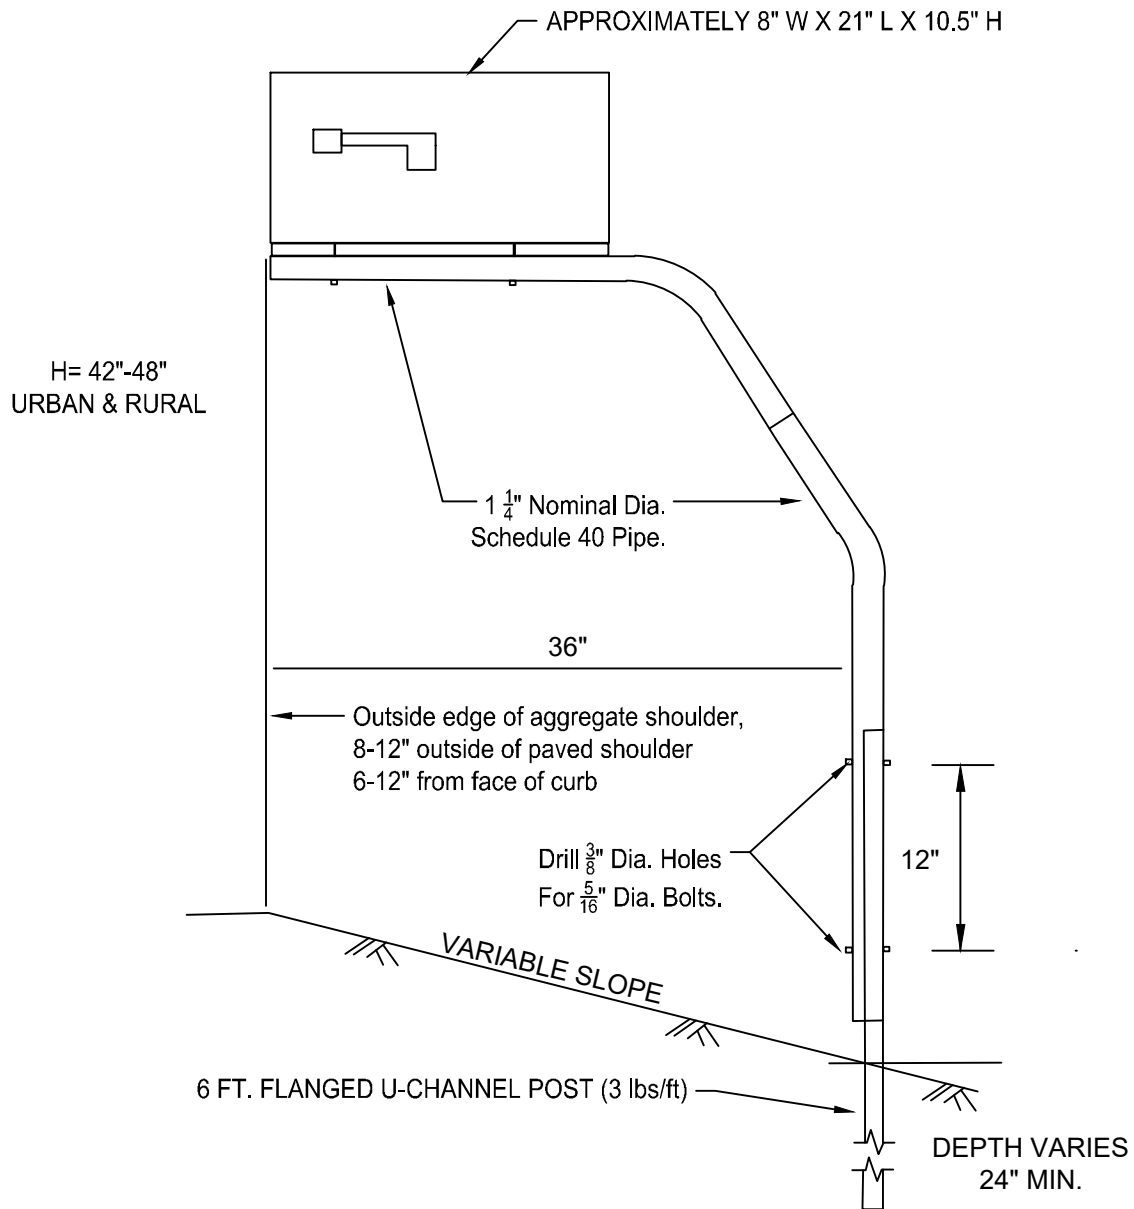

NOTES:

1. ALL MAILBOXES SHALL BE SWING AWAY STYLE MAILBOXES UNLESS OTHERWISE APPROVED BY THE CITY ENGINEER.
2. SWING-AWAY MAILBOXES SHALL BE SWINGSAFE SWING-AWAY MAILBOX SUPPORT OR APPROVED EQUAL.




2025 Standard Detail Plates

SWING AWAY MAILBOX


LAST REVISION:
01/02/2025



PLATE NO.
STR-35

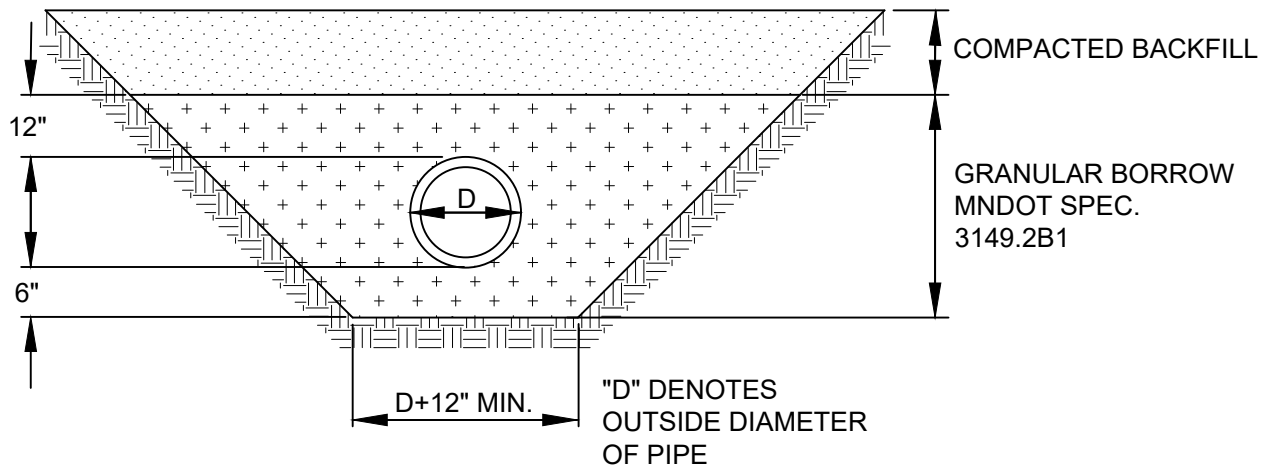

PIPE FOUNDATION & BEDDING IN GOOD SOILS

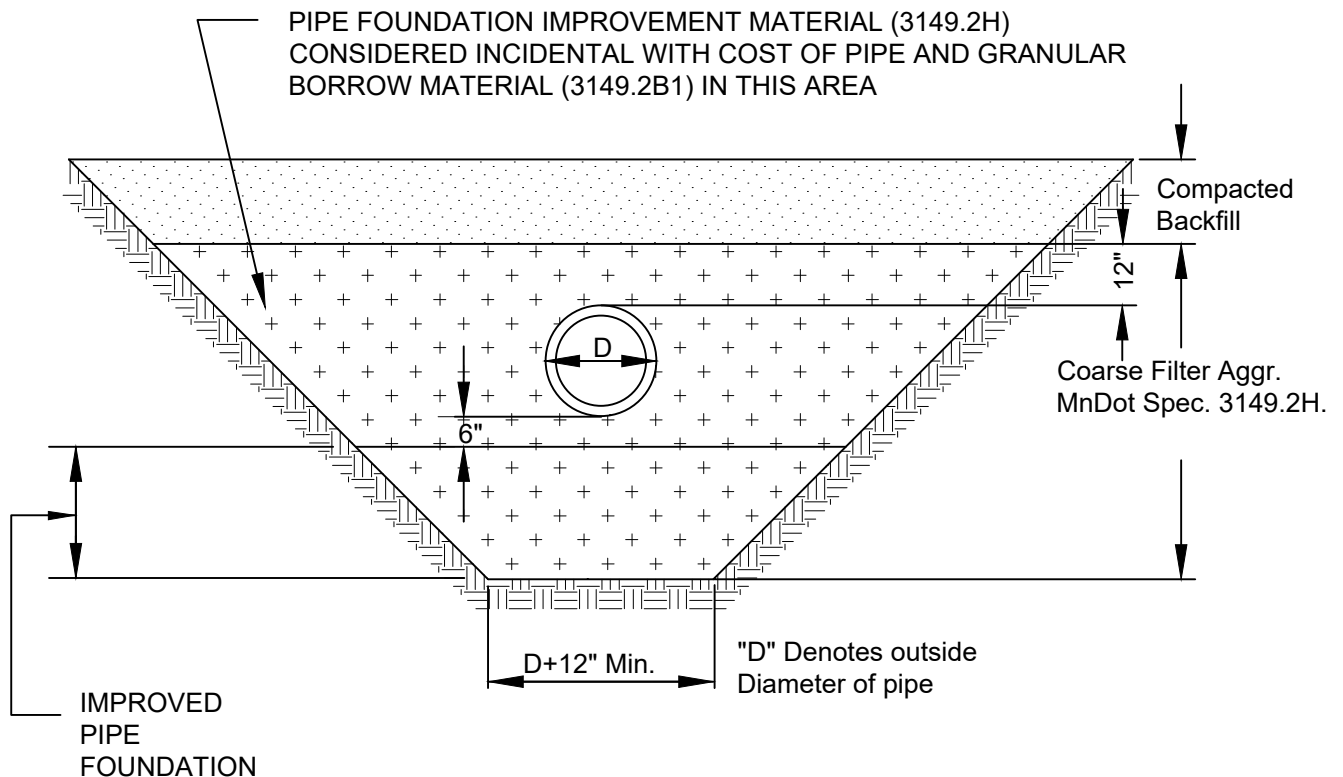

PIPE FOUNDATION & BEDDING IN POOR SOILS

NOTE:

1. ALL SDR-35 PVC SHALL BE USED TO A DEPTH NOT TO EXCEED 16'. SDR-26 PVC SHALL BE USED FOR DEPTHS GREATER THAN 16'. C-900 PVC SHALL BE USED FOR DEPTHS GREATER THAN 25'.




2025 Standard Detail Plates

BEDDING METHODS FOR PVC




LAST REVISION:
06/08/2025



PLATE NO.
BED-1

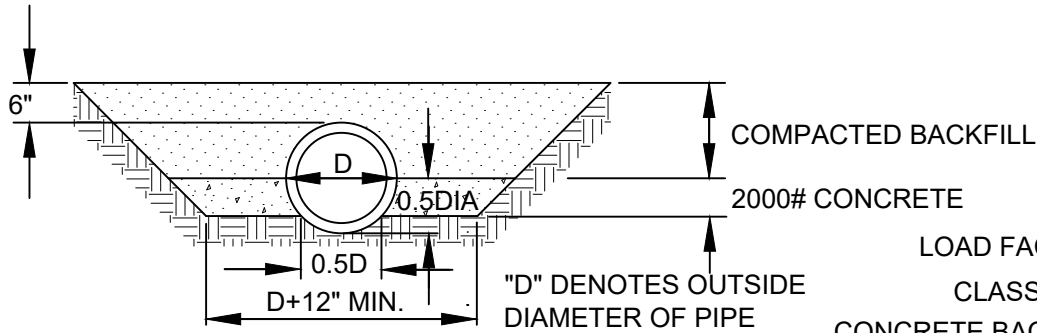

CONCRETE BACKFILL TO 0.5 OF OUTSIDE DIAMETER WITH SHAPED BEDDING.

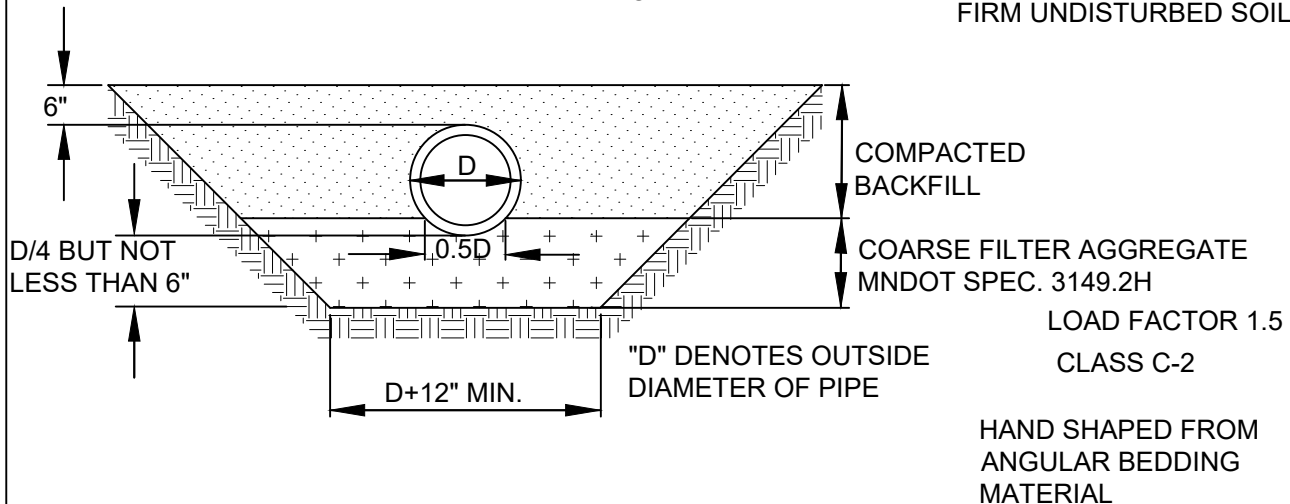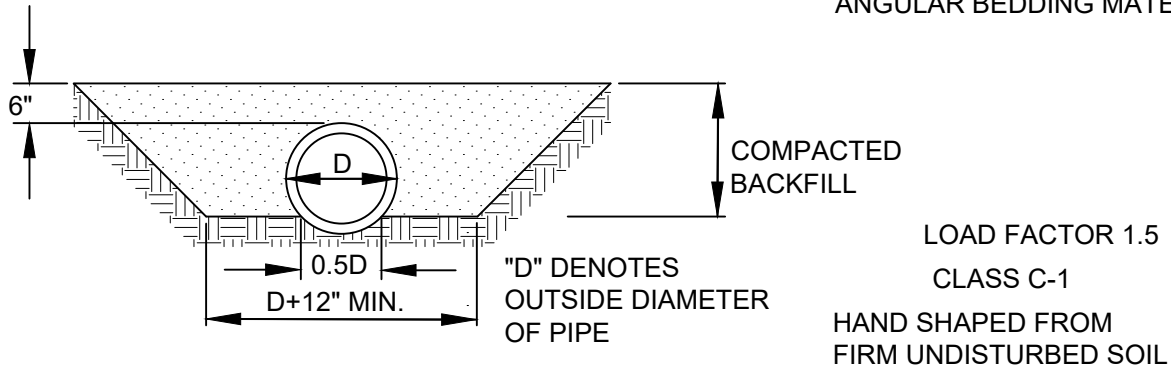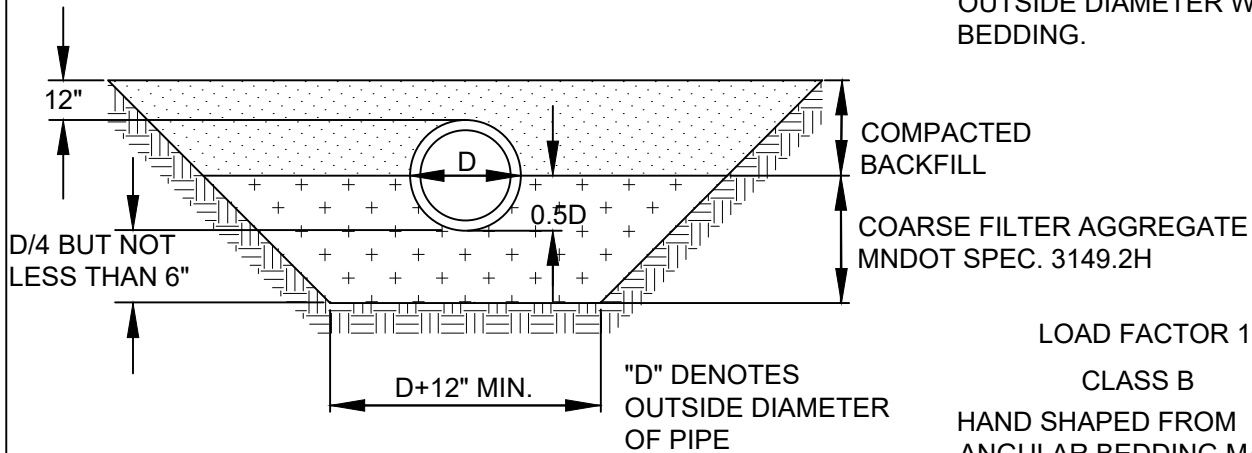


2025 Standard Detail Plates

BEDDING METHODS FOR RCP AND DIP

LAST REVISION:
06/08/2025



PLATE NO.
BED-2

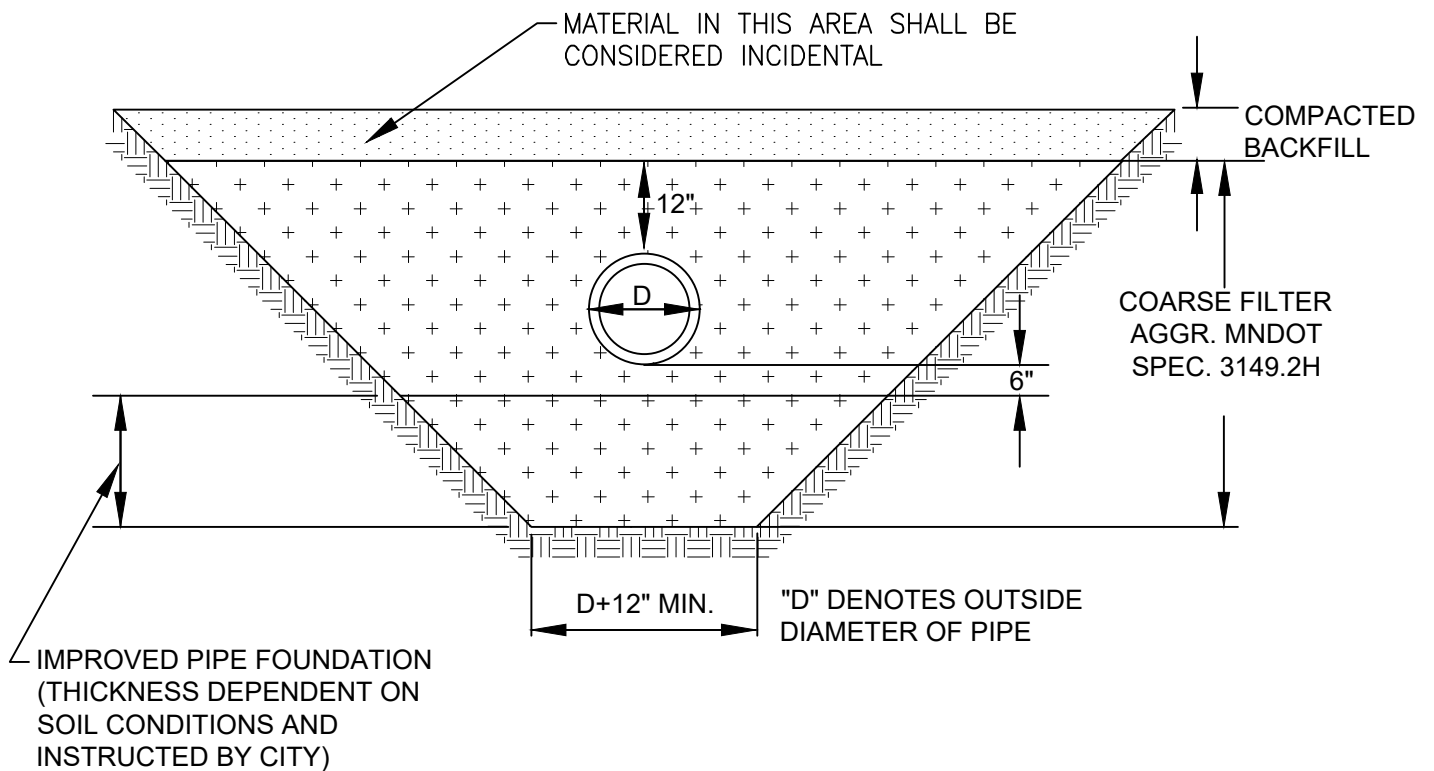


2025 Standard Detail Plates

IMPROVED PIPE FOUNDATION FOR RCP AND DIP

LAST REVISION:
06/28/2024



PLATE NO.
BED-3

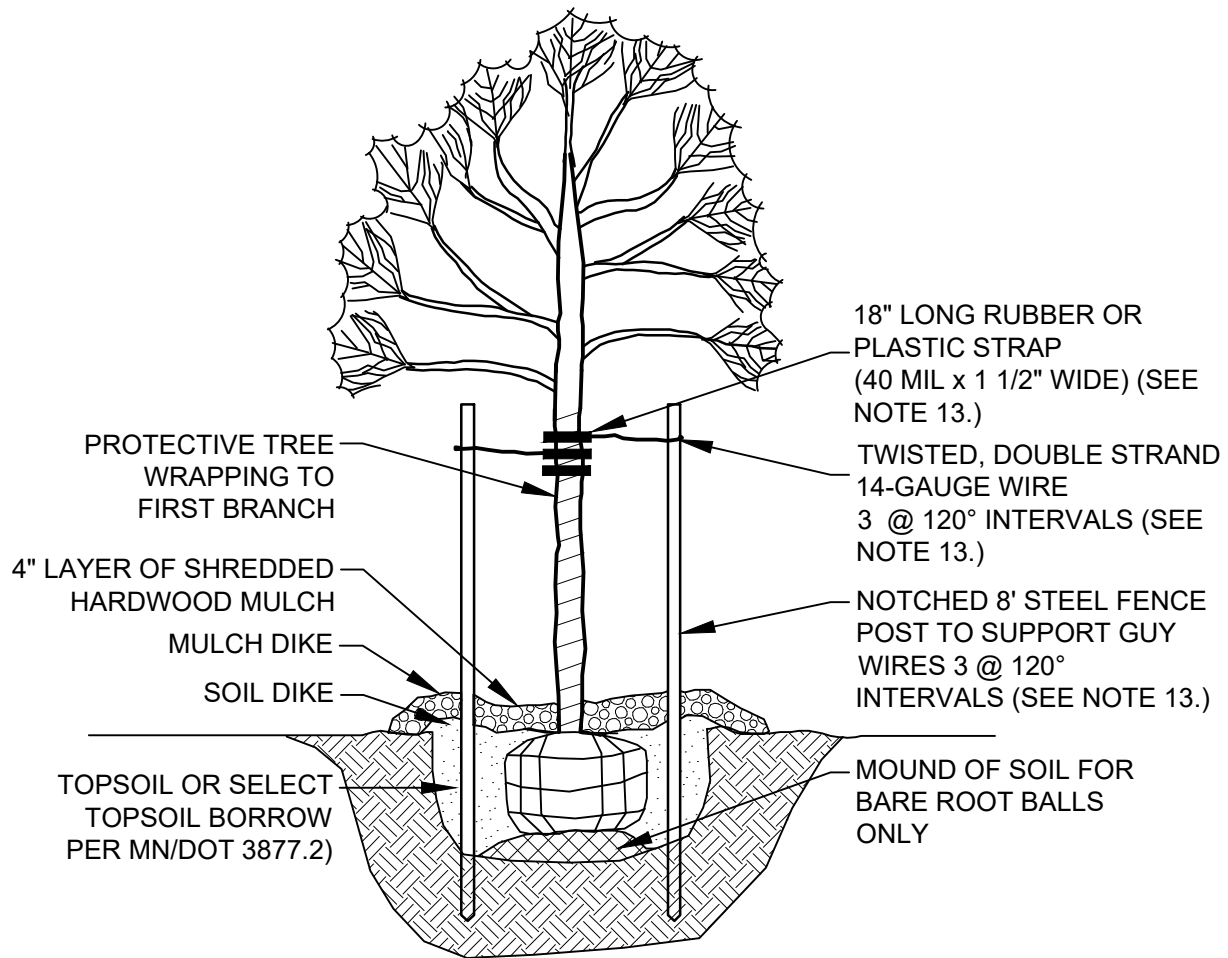

NOTES:

1. PLANTS TO BE INSTALLED PER THE AMERICAN ASSOCIATION OF NURSEYMEN (AAN) STANDARD PLANTING PRACTICES.
2. PROVIDE & INSTALL PLANT MATERIALS THAT ARE THE SIZE, TYPE, AND SPECIES INDICATED IN PLANS.
3. BEFORE PLANTING, REMOVE DEAD OR DAMAGED BRANCHES.
4. DIG HOLE 12" LARGER THAN ROOT BALL ON ALL SIDES.
5. SCARIFY BOTTOM OF HOLE.
6. LOOSEN BURLAP COVERING ON ROOT BALL. REMOVE TOP OF BURLAP ON BALLED & BURLAPPED MATERIALS.
7. IF BARE ROOTED, SET BARE ROOT CROWN ON MOUND & SPREAD ROOTS OVER & DOWN SIDES OF MOUND.
8. PLANT TREE SO TOP OF ROOT BALL IS FLUSH WITH TOP OF SOIL.
9. FILL HOLE $\frac{2}{3}$ FULL OF SOIL & TAMP.
10. FILL REMAINING SPACE WITH WATER AND WAIT FOR IT TO SETTLE.
11. FINISH FILLING HOLE WITH SOIL AND MAKE A SOIL DIKE AROUND ROOT BALL.
12. CONTRACTOR SHALL VERIFY LOCATIONS OF ALL UTILITIES PRIOR TO DIGGING AND PLANT INSTALLATION.
13. TREE STAKING IS ILLUSTRATED AND SHALL BE UTILIZED ONLY IF NECESSARY. MAINTAIN TREES IN A PLUMB POSITION THROUGHOUT THE GUARANTEE PERIOD.




2025 Standard Detail Plates

DECIDUOUS TREE PLANTING

LAST REVISION:
06/28/2024




PLATE NO.
LAN-1

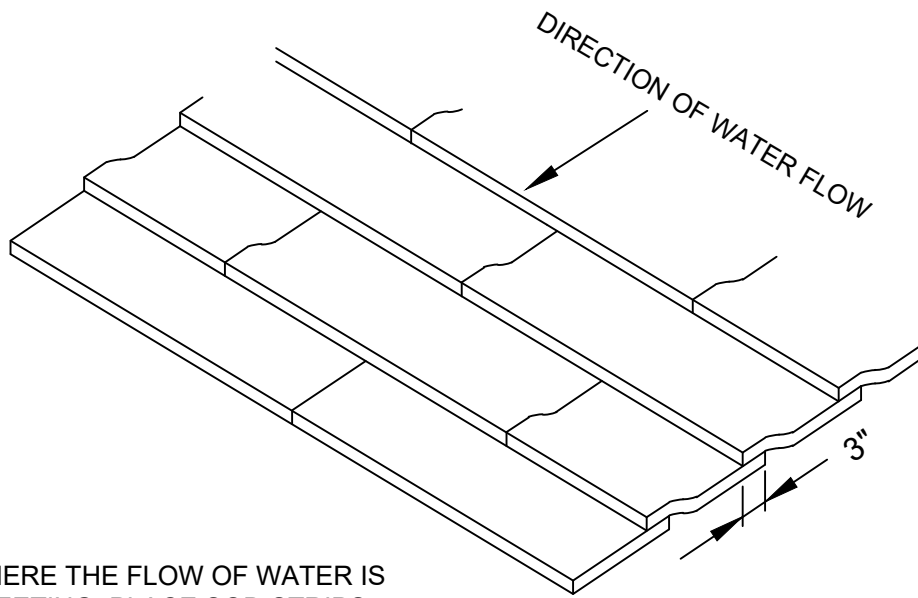

WHERE THE FLOW OF WATER IS SHEETING, PLACE SOD STRIPS PERPENDICULAR TO THE DIRECTION OF WATER FLOW

SHINGLING SOD

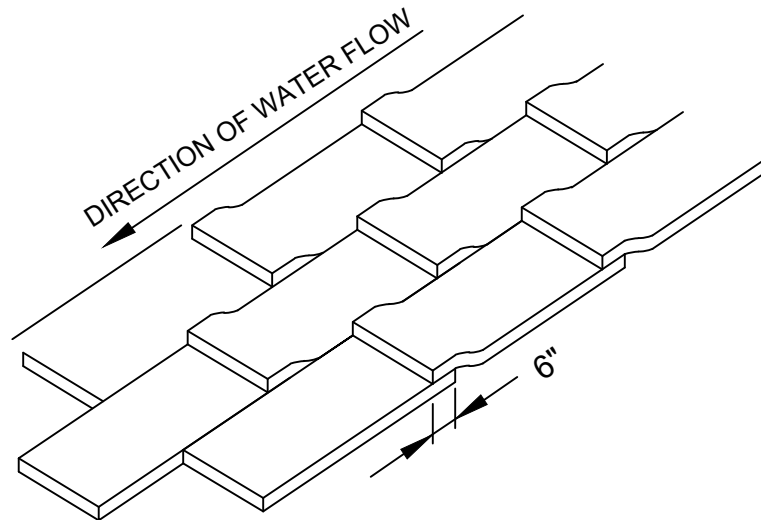

OVERLAPPING SOD

WHERE THE FLOW OF WATER IS CONCENTRATED, PLACE SOD STRIPS PARALLEL TO THE DIRECTION OF WATER FLOW

NOTES:

1. BEFORE LAYING SOD, RAKE SOIL TO BREAK CLOUDS & REMOVE DEBRIS.
2. INSURE CONTACT BETWEEN SOD AND NATIVE SOIL.




2025 Standard Detail Plates

SODDING

LAST REVISION:
06/28/2024



PLATE NO.
LAN-2

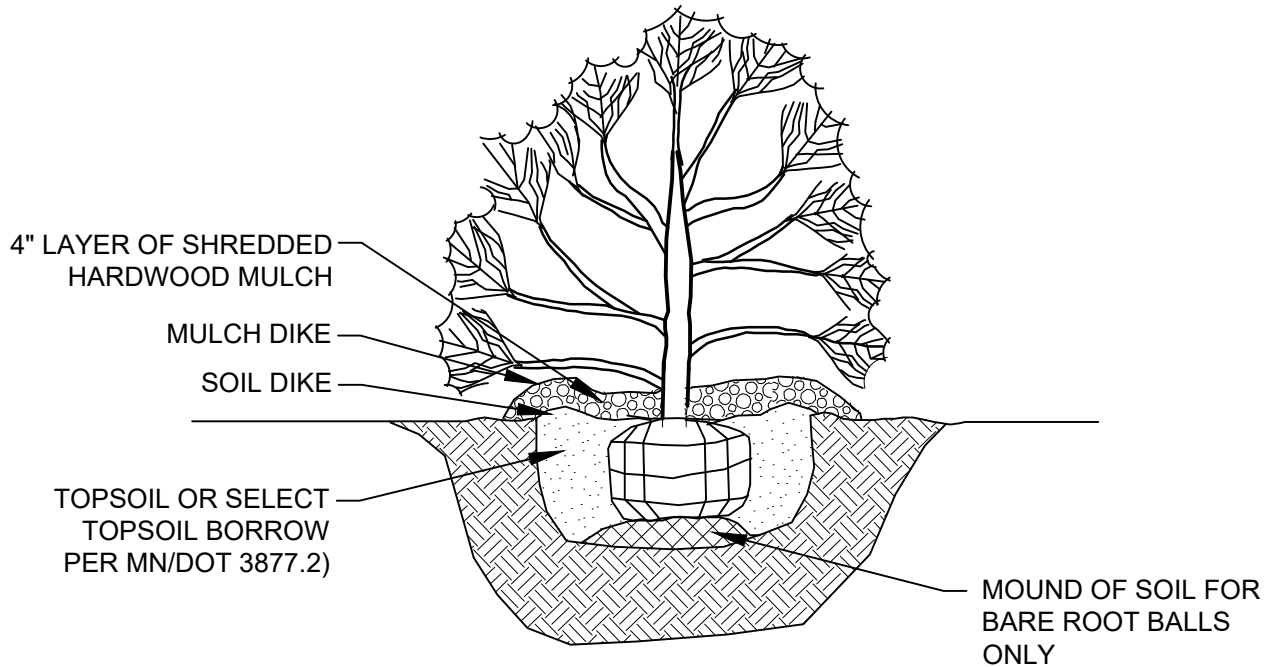

NOTES:

1. PLANTS TO BE INSTALLED AS PER THE AMERICAN ASSOCIATION OF NURSEYMAN (AAN) STANDARD PLANTING PRACTICES.
2. PROVIDE & INSTALL PLANT MATERIALS THAT ARE THE SIZE, TYPE, AND SPECIES INDICATED IN PLANS.
3. BEFORE PLANTING, REMOVE DEAD OR DAMAGED BRANCHES.
4. DIG HOLE TWO TIMES ROOT BALL WIDTH AND 6" DEEPER THAN BALL HEIGHT.
5. SCARIFY BOTTOM OF HOLE.
6. LOOSEN BURLAP COVERING ON ROOT BALL. REMOVE TOP OF BURLAP ON BALLED & BURLAPPED MATERIALS.
7. IF BARE ROOTED, SET BARE ROOT CROWN ON MOUND & SPREAD ROOTS OVER & DOWN SIDES OF MOUND.
8. PLANT TREE SO TOP OF ROOT BALL IS FLUSH WITH TOP OF SOIL.
9. FILL HOLE $\frac{2}{3}$ FULL OF SOIL & TAMP.
10. FILL REMAINING SPACE WITH WATER AND WAIT FOR IT TO SETTLE.
11. FINISH FILLING HOLE WITH SOIL AND MAKE A SOIL DIKE AROUND ROOT BALL.
12. CONTRACTOR SHALL VERIFY LOCATION OF ALL UTILITIES PRIOR TO DIGGING AND PLANT INSTALLATION.




2025 Standard Detail Plates

DECIDUOUS SHRUB PLANTING

LAST REVISION:
06/28/2024



PLATE NO.
LAN-3

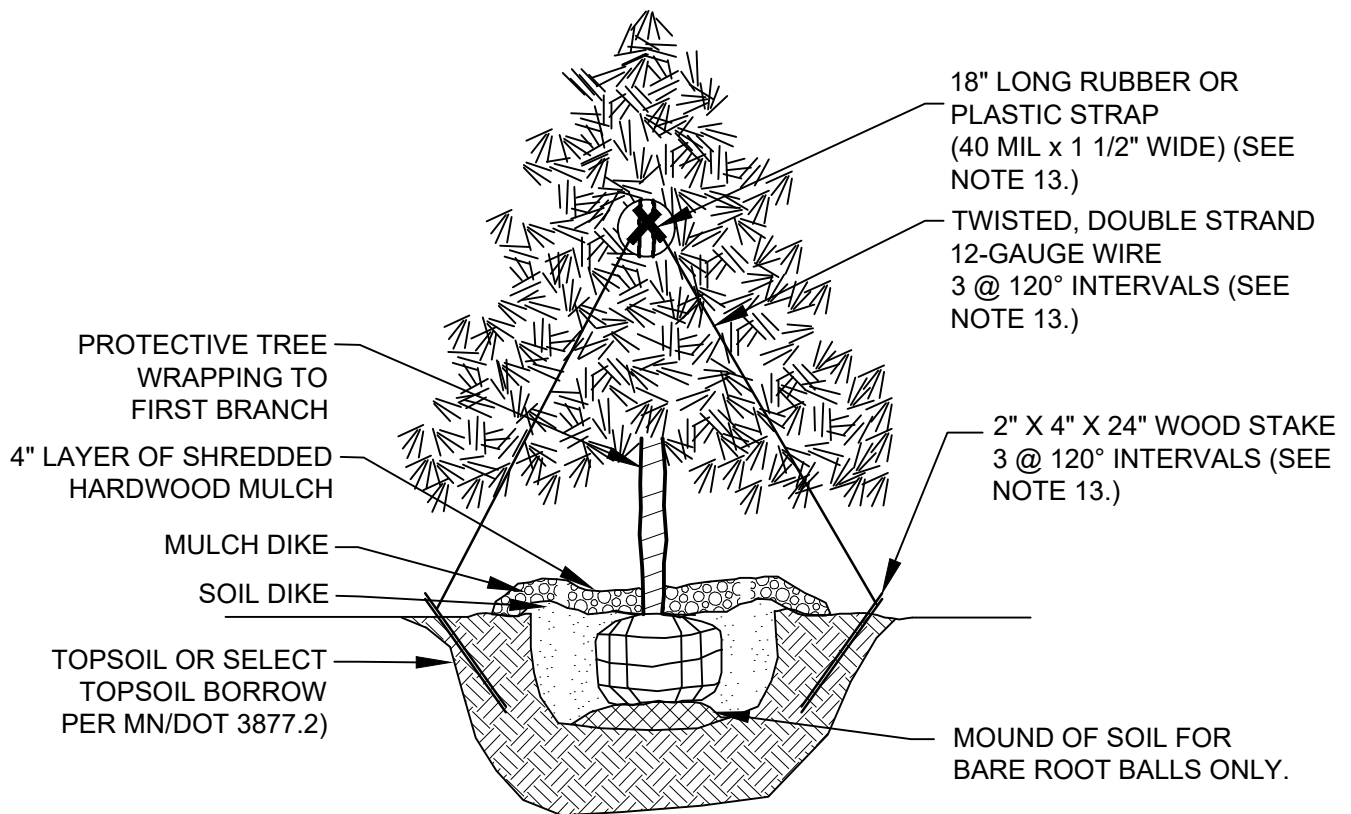

NOTES:

1. PLANTS TO BE INSTALLED PER THE AMERICAN ASSOCIATION OF NURSEYMEN (AAN) STANDARD PLANTING PRACTICES.
2. PROVIDE & INSTALL PLANT MATERIALS THAT ARE THE SIZE, TYPE, AND SPECIES INDICATED IN PLANS.
3. BEFORE PLANTING, REMOVE DEAD OR DAMAGED BRANCHES.
4. DIG HOLE TWO TIMES ROOT BALL WIDTH AND 6" DEEPER THAN BALL HEIGHT.
5. SCARIFY BOTTOM OF HOLE.
6. LOOSEN BURLAP COVERING ON ROOT BALL. REMOVE TOP OF BURLAP ON BALLED & BURLAPPED MATERIALS.
7. IF BARE ROOTED, SET BARE ROOT CROWN ON MOUND & SPREAD ROOTS OVER & DOWN SIDES OF MOUND.
8. PLANT TREE SO TOP OF ROOT BALL IS FLUSH WITH TOP OF SOIL.
9. FILL HOLE $\frac{2}{3}$ FULL OF SOIL & TAMP.
10. FILL REMAINING SPACE WITH WATER AND WAIT FOR IT TO SETTLE.
11. FINISH FILLING HOLE WITH SOIL AND MAKE A SOIL DIKE AROUND ROOT BALL.
12. CONTRACTOR SHALL VERIFY LOCATIONS OF ALL UTILITIES PRIOR TO DIGGING AND PLANT INSTALLATION.
13. TREE STAKING IS ILLUSTRATED AND SHALL BE UTILIZED ONLY IF NECESSARY. MAINTAIN TREES IN A PLUMB POSITION THROUGHOUT THE GUARANTEE PERIOD.




2025 Standard Detail Plates

CONIFEROUS TREE PLANTING

LAST REVISION:
06/28/2024



PLATE NO.
LAN-4

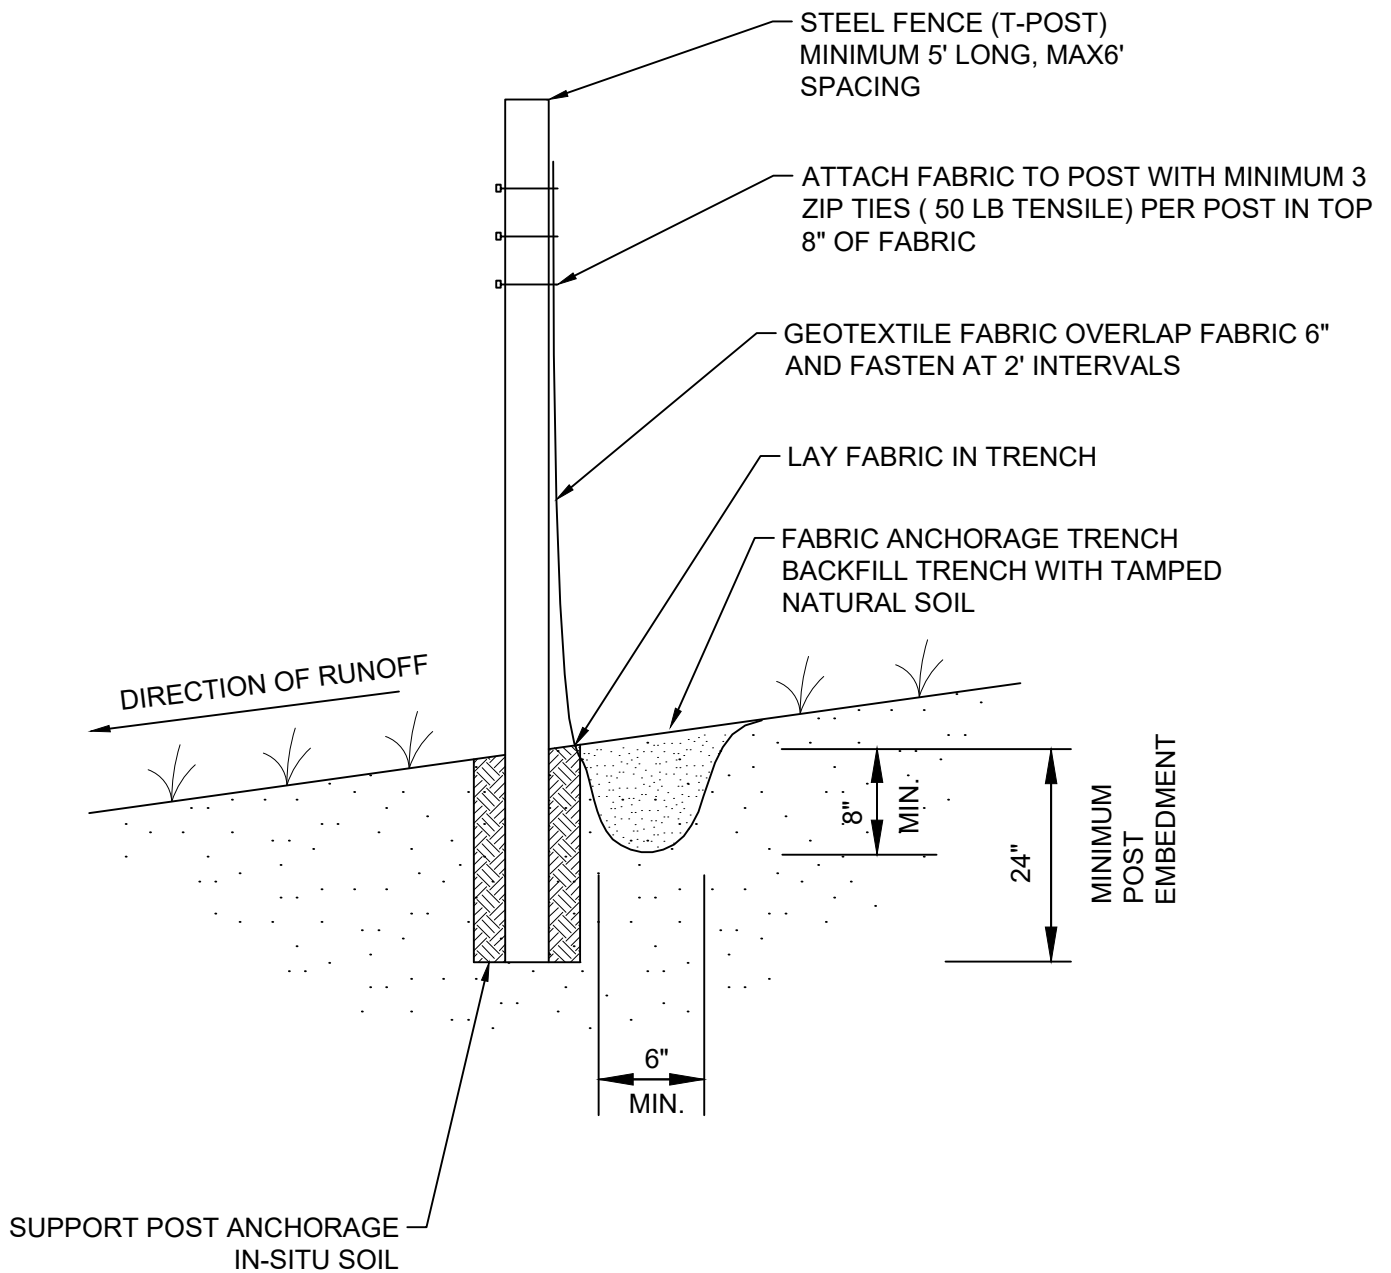


2025 Standard Detail Plates

SILT FENCE MACHINE SLICED

LAST REVISION:
06/28/2024



PLATE NO.
ERO-1A

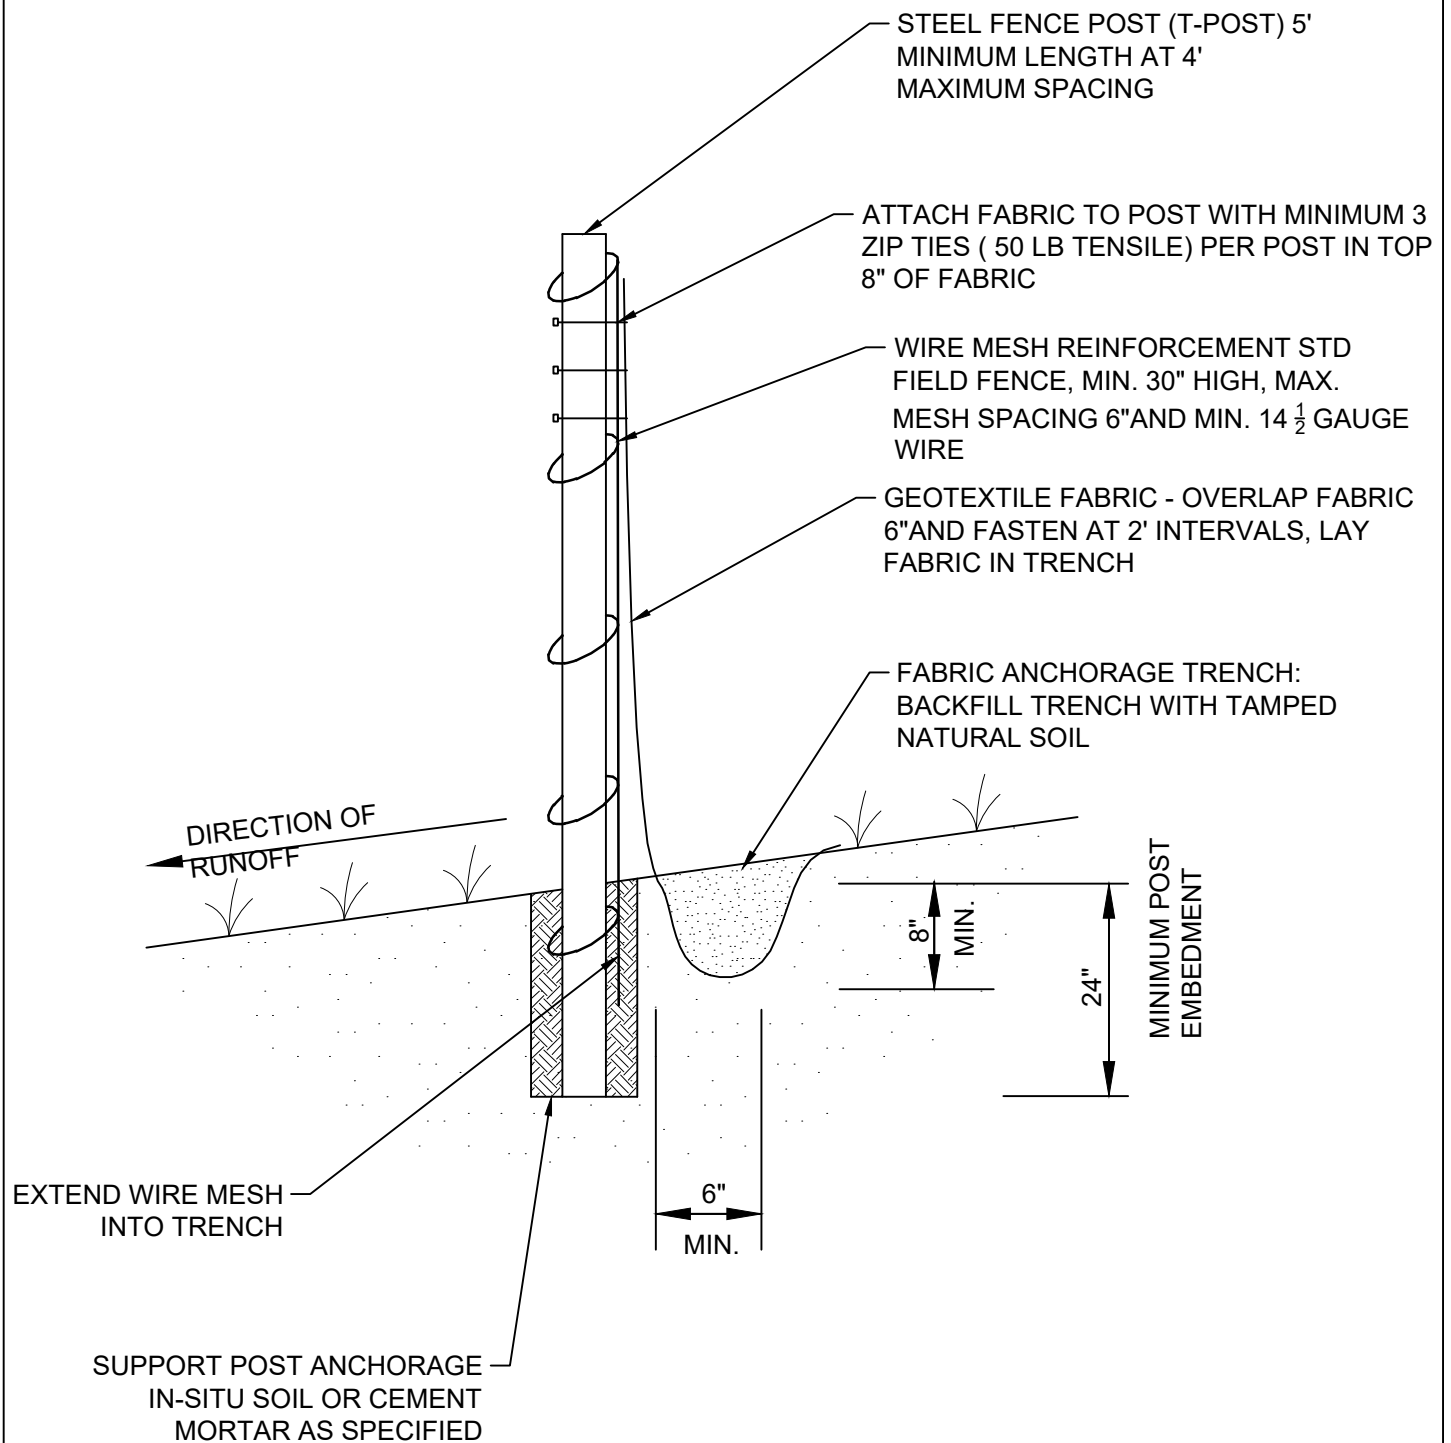


2025 Standard Detail Plates

SILT FENCE HEAVY DUTY

LAST REVISION:
06/28/2024




PLATE NO.
ERO-1B

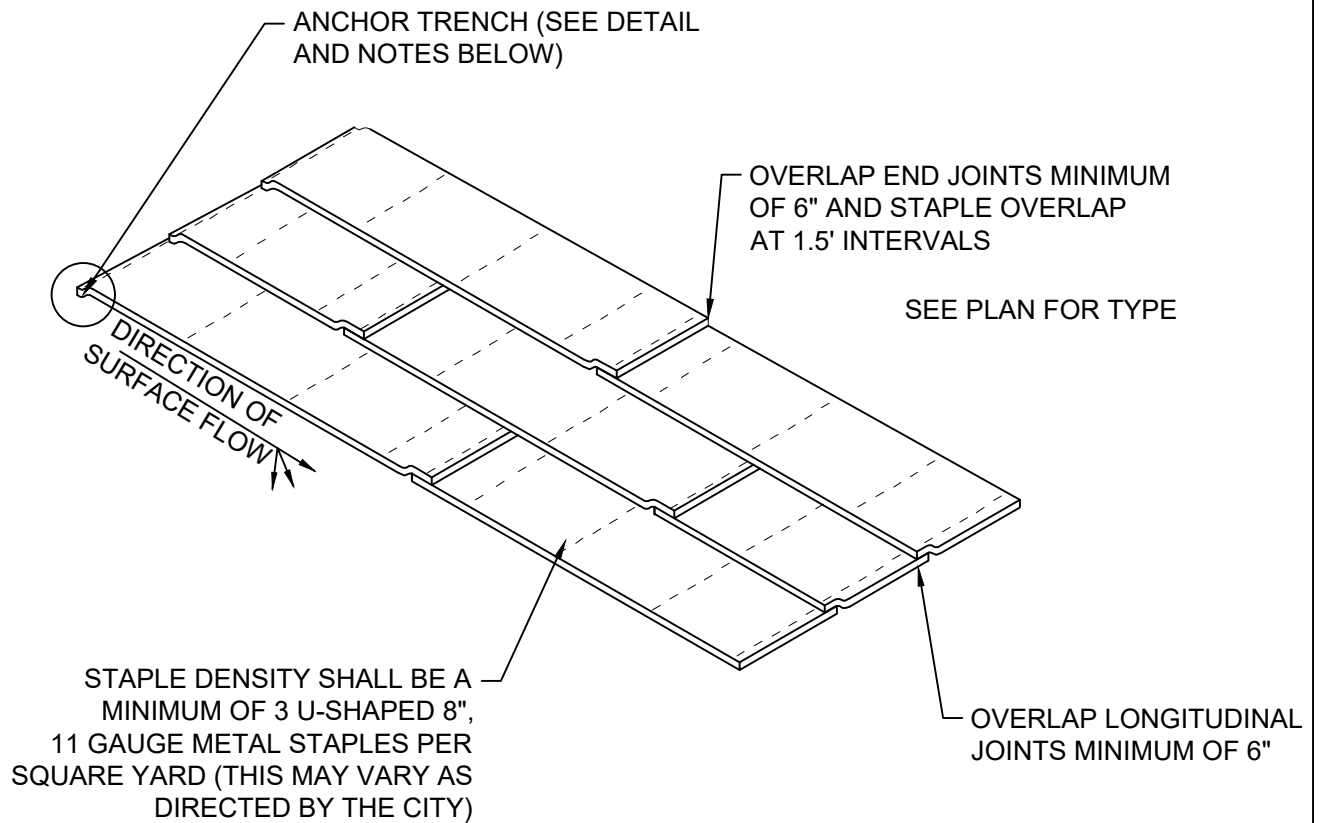

ANCHOR TRENCH

1. DIG 6" X 6" TRENCH
2. LAY BLANKET IN TRENCH
3. STAPLE AT 1.5' INTERVALS
4. BACKFILL WITH NATURAL SOIL AND COMPACT

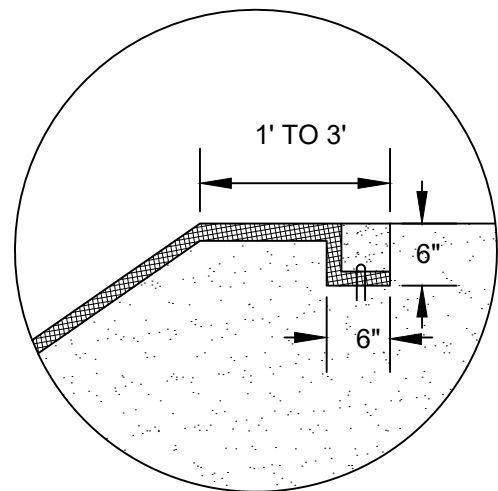


2025 Standard Detail Plates

EROSION CONTROL BLANKET INSTALLATION

LAST REVISION:
06/28/2024



PLATE NO.
ERO-2

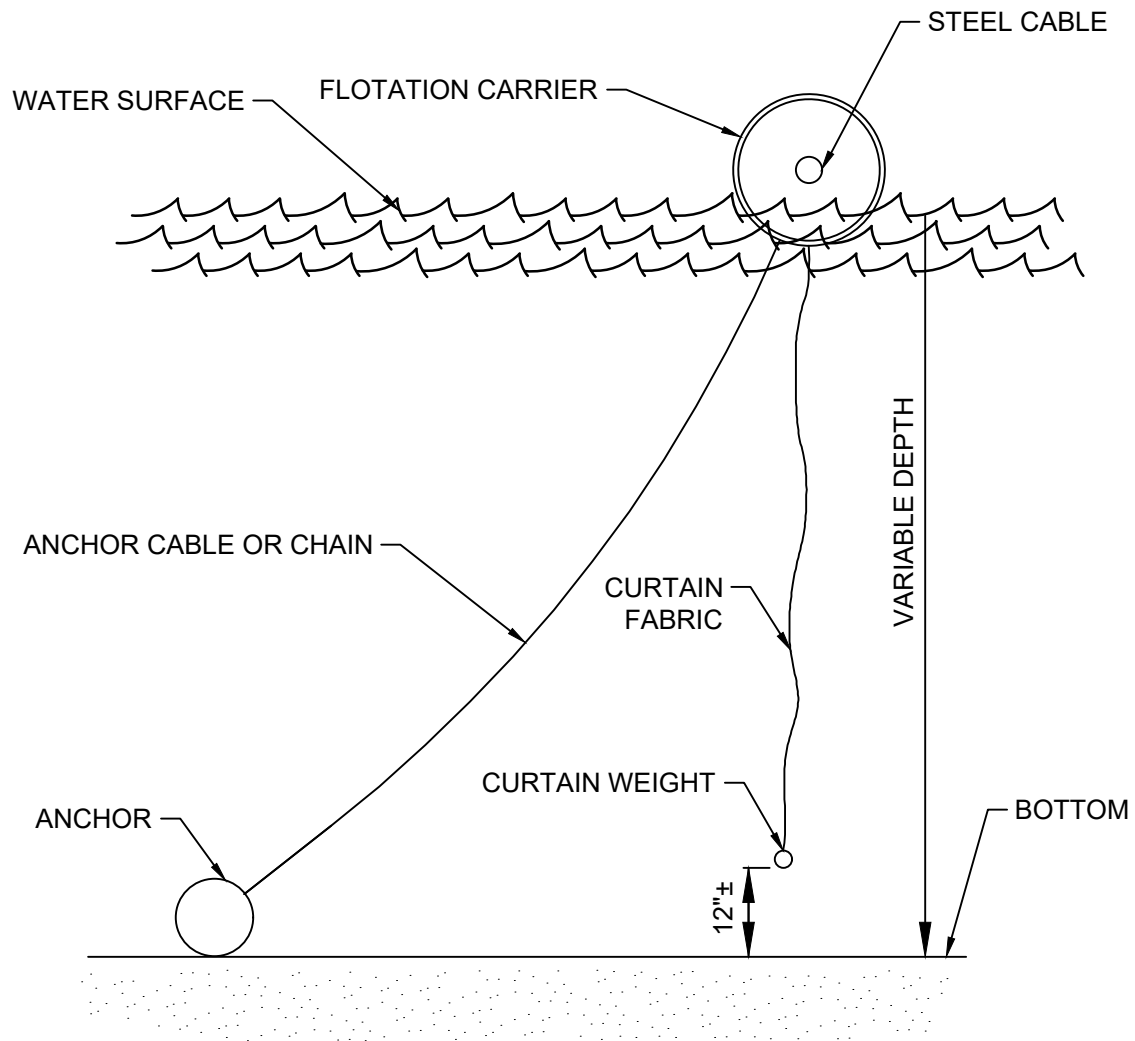

NOTE:
 DOUBLE SILT FENCES SHOULD BE SPACED 10' APART.
 CURTAIN LENGTH TO MATCH BOTTOM PROFILE AS CLOSELY AS POSSIBLE.
 MAXIMUM INTERVAL FOR SPACING OF WEIGHT IS 15'.



2025 Standard Detail Plates

FLOATING SILT CURTAIN

LAST REVISION:
 06/28/2024




PLATE NO.
 ERO-3

WOODEN LATH SHALL BE NAILED
SECURELY TO THE POST MEMBER
TO SECURE FILTER FABRIC.

2" x 4" x 2.5" LONG
WOOD POSTS, 8 REQ'D

2" X 4" HORIZONTAL MEMBERS
CONTINUOUS AROUND TOP AND
BOTTOM FASTENED TO EACH POST
USING 2 - 20D COMMON NAILS

MONOFILAMENT GEOTEXTILE
(SILT FENCE) FABRIC AS
SPECIFIED ADDITIONAL 8 - 10" OF
FABRIC FLAP AT BOTTOM OF BOX

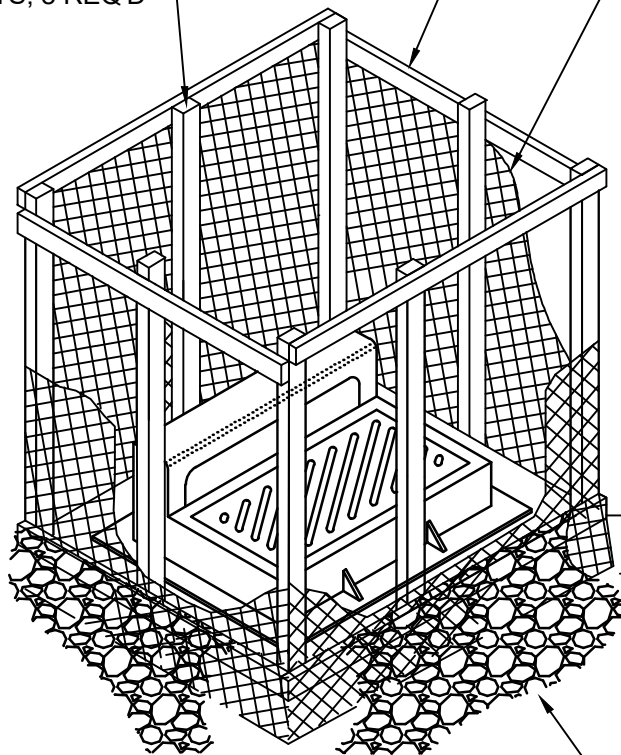

2'-6"

8-10" FABRIC FLAP EXTENDING
BEYOND BOTTOM 2"X4" - BURY
UNDER ROCK TO PREVENT
UNDERWASHING

1 1/2" WASHED ROCK
1'DEEP X 1' WIDE

NOTES:

CONTRACTOR SHALL CONSTRUCT SILT BOX TO FIT AROUND
THE INLET STRUCTURE WITH 6" MINIMUM CLEARANCE TO
EDGES OF STRUCTURE. SILT BOX
TO BE PLACED ON AN EVEN SURFACE 6" BELOW STRUCTURE
OPENING. TOP OF SILT BOX TO
EXTEND 18" MINIMUM ABOVE EXISTING GRADE.



2025 Standard Detail Plates



INLET PROTECTION SILT BOX FOR CATCH BASIN

LAST REVISION:
06/28/2024



PLATE NO.
ERO-4A

PLAN

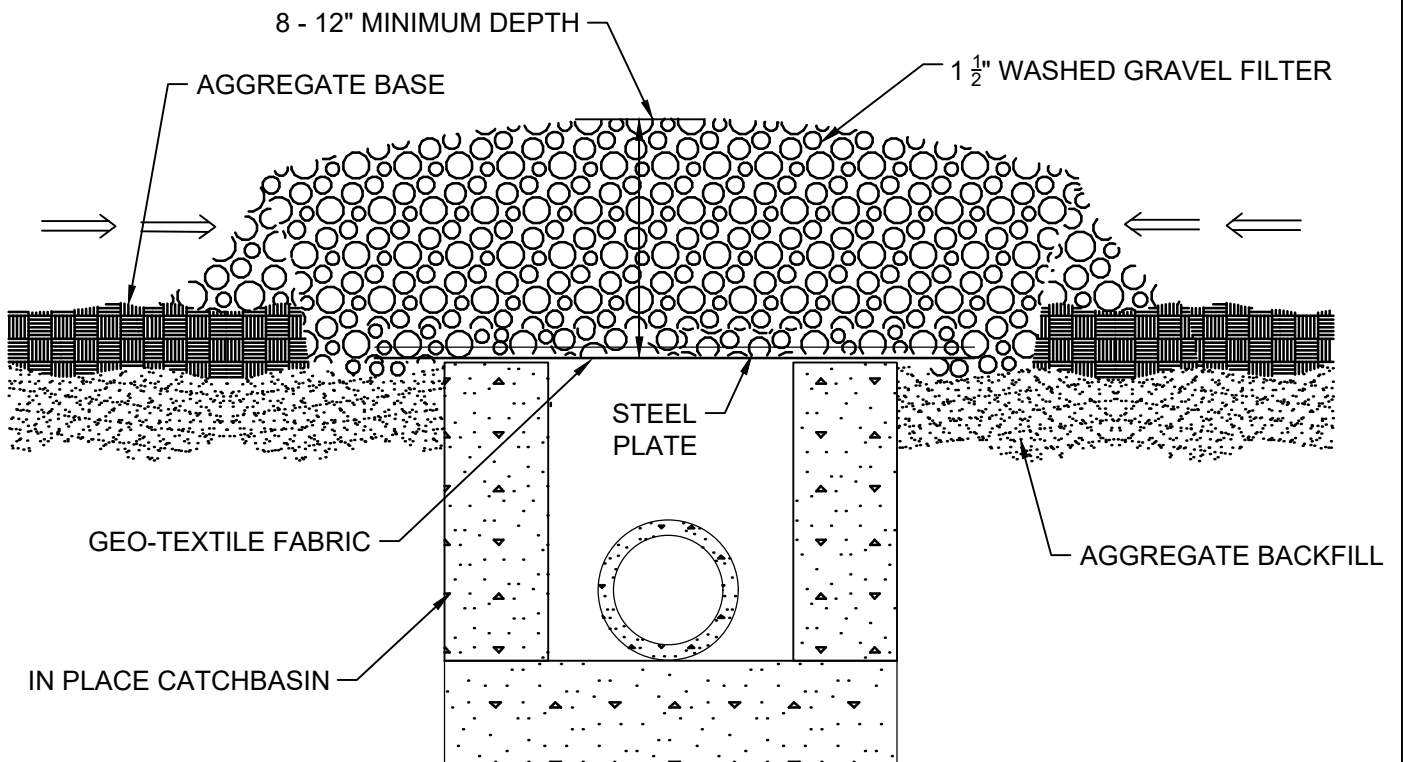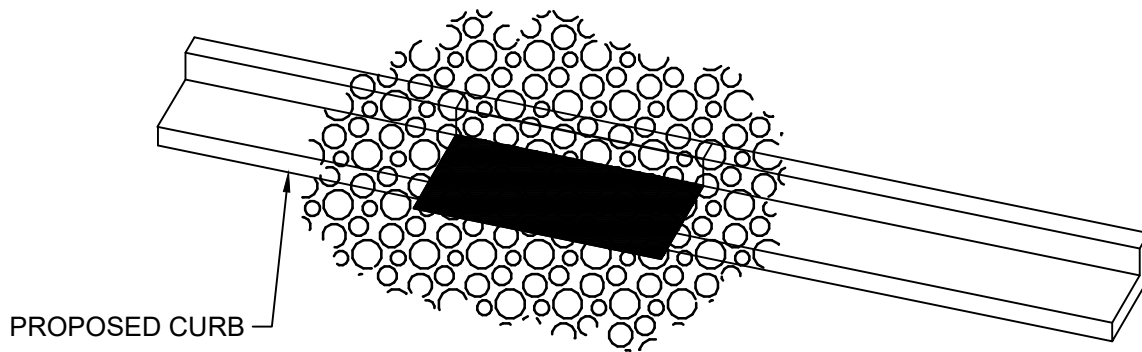


2025 Standard Detail Plates

INLET PROTECTION CATCH BASIN ROCK FILTER


LAST REVISION:
06/28/2024



PLATE NO.
ERO-4B

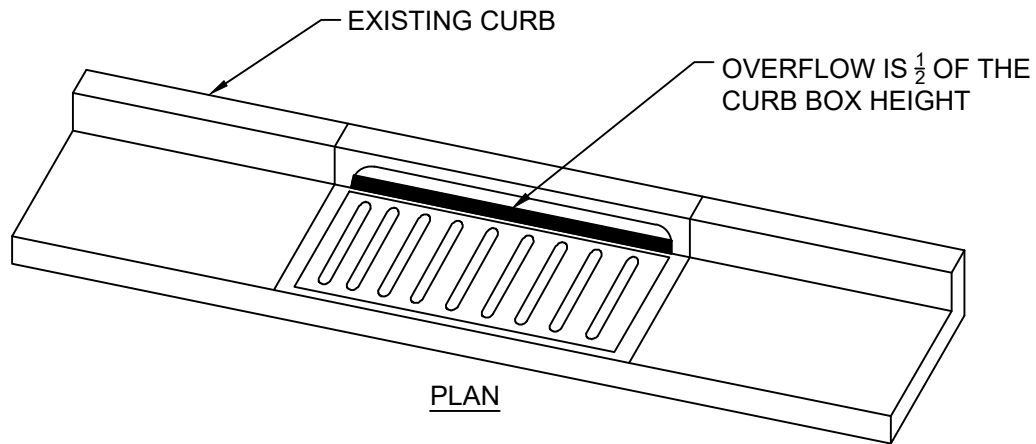

WIMCO ROAD DRAIN CG-3067 HIGH FLOW
INLET PROTECTION CURB AND GUTTER MODEL OR
CITY APPROVED EQUAL.

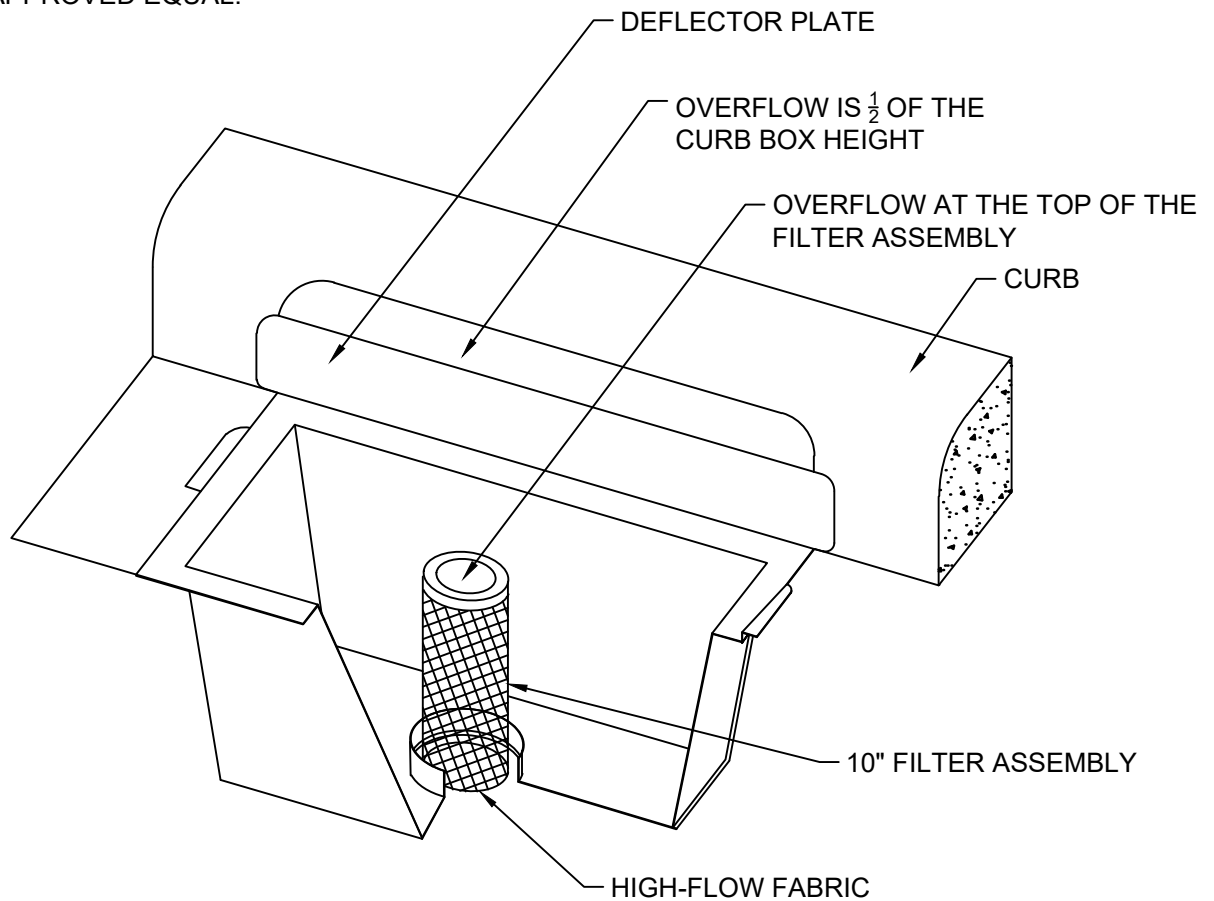


2025 Standard Detail Plates

INLET PROTECTION CATCH BASIN INSERT

LAST REVISION:
06/28/2024



PLATE NO.
ERO-4C

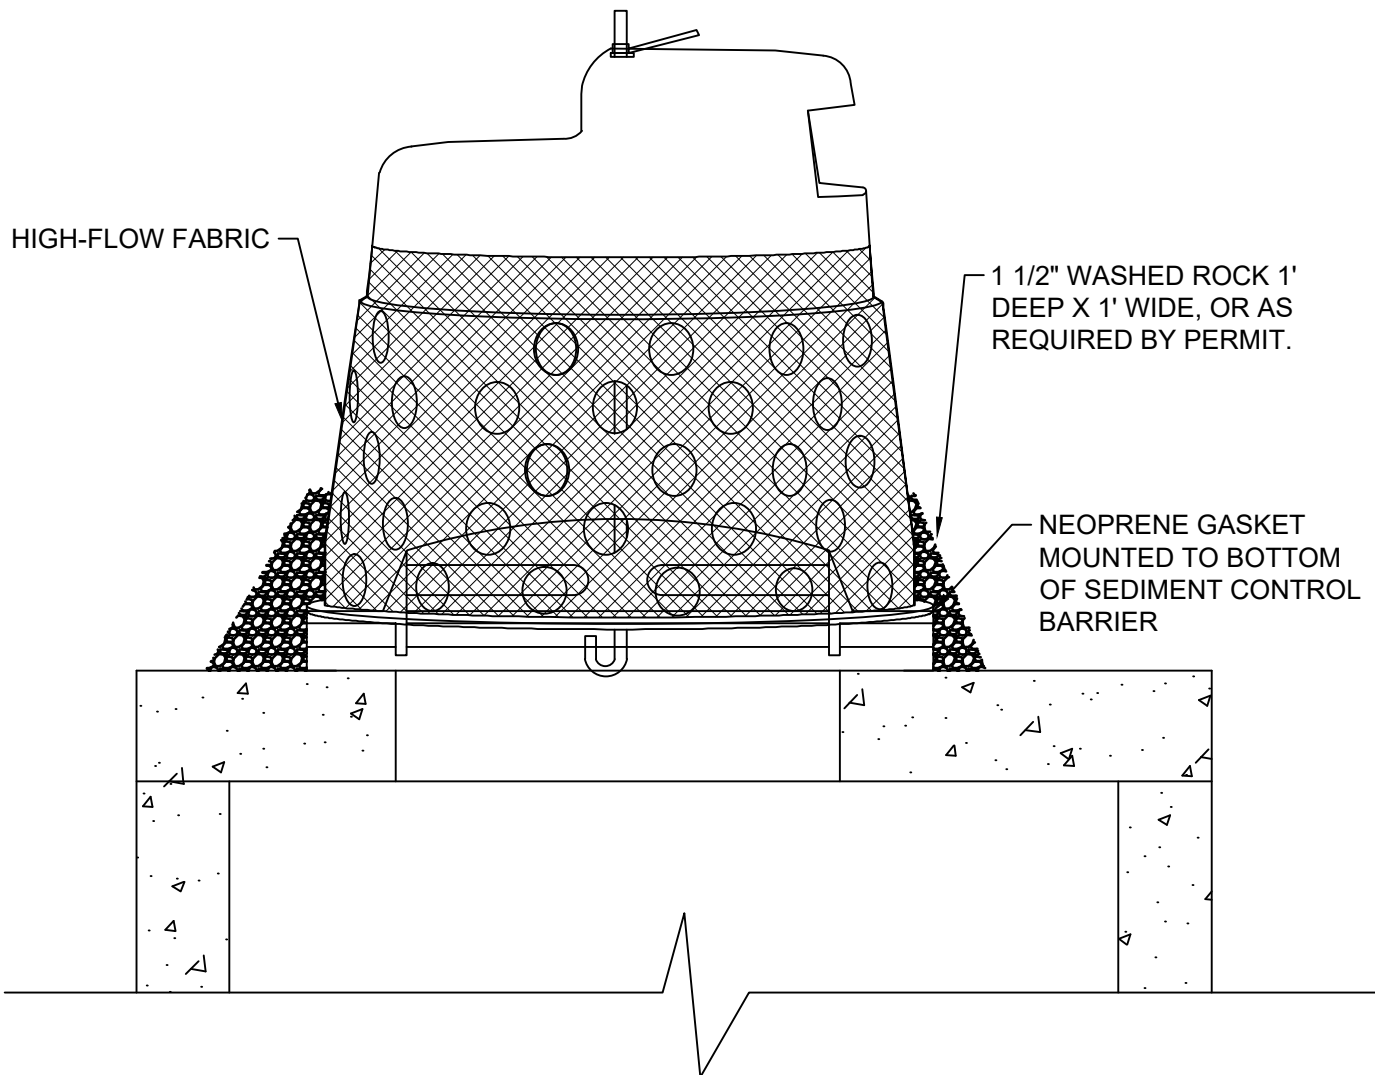

NOTES:
 INFRASAFE SEDIMENT CONTROL BARRIER OR CITY
 APPROVED EQUAL



2025 Standard Detail Plates

INLET PROTECTION BEEHIVE CASTING SILT BOX


LAST REVISION:
 06/28/2024



PLATE NO.
 ERO-4D

6" X 6" TRENCH WITH LEADING EDGE OF TYPE IV
GEO-TEXTILE FABRIC STAPLED AT 4'
INTERVALS AND BACKFILLED WITH NATURAL SOIL

ROCK WEEPER, BIO WEEPER,
OR CHECK DAM

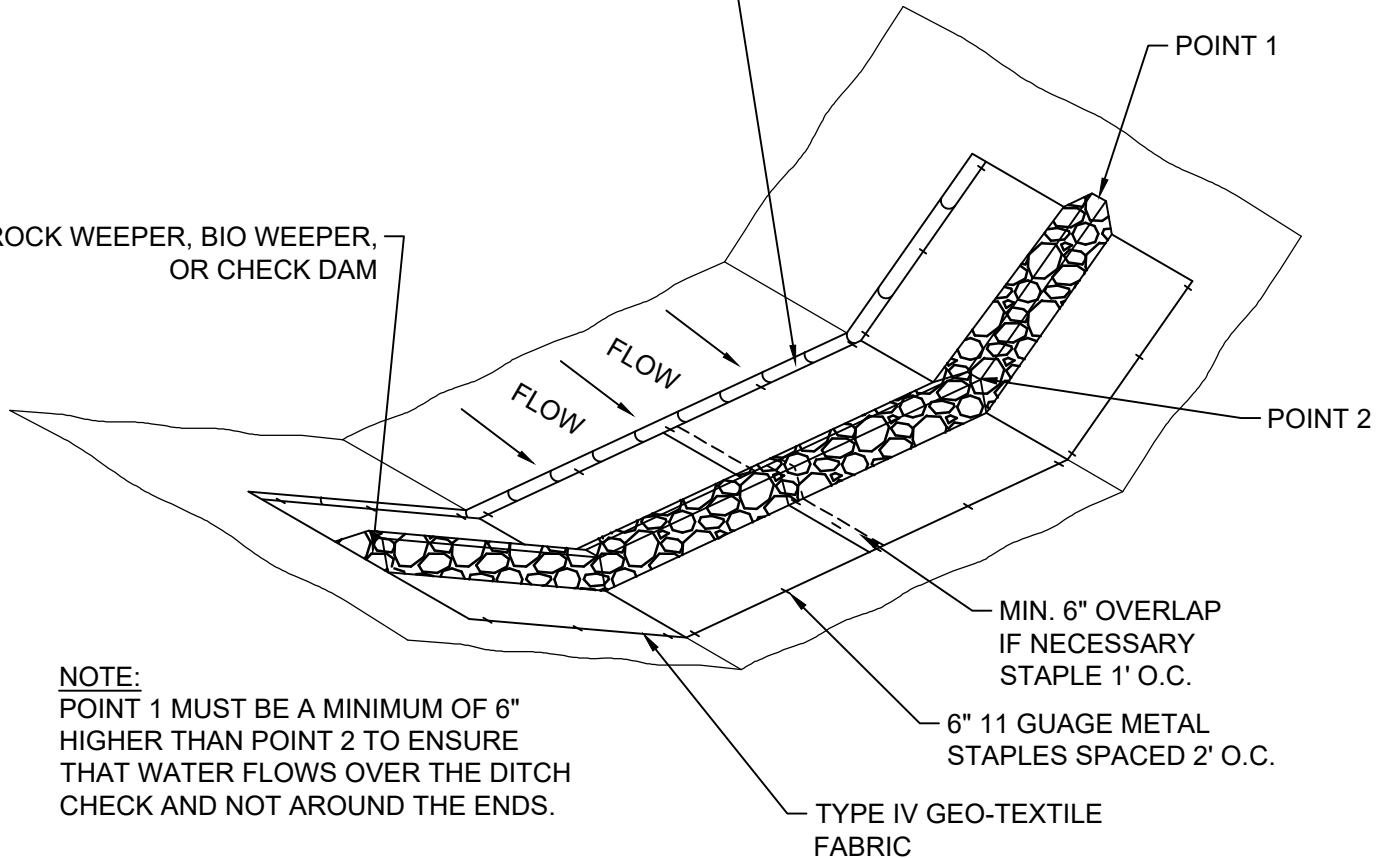

NOTE:
POINT 1 MUST BE A MINIMUM OF 6"
HIGHER THAN POINT 2 TO ENSURE
THAT WATER FLOWS OVER THE DITCH
CHECK AND NOT AROUND THE ENDS.

DITCH CHECK SPACING
(USE FOR 5B AND 5C)

DITCH GRADE	INTERVAL
(%)	(FT)
2	100
4	75
6	50
8	40
10	25
10+	25



2025 Standard Detail Plates


DITCH CHECK - 3D VIEW FOR 5B, 5C, AND SPACING

LAST REVISION:
06/28/2024




PLATE NO.
ERO-5A

I. ROCK WEEPER

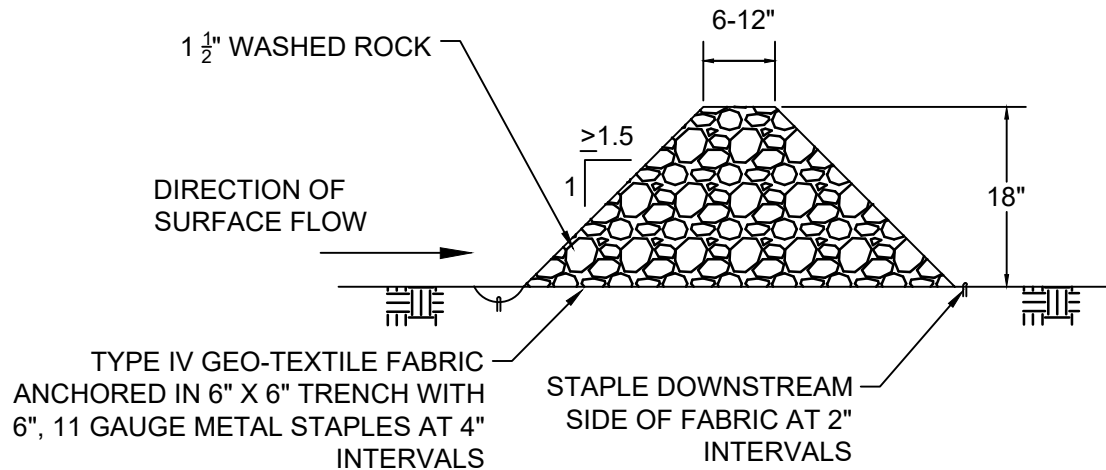

II. BIO WEEPER

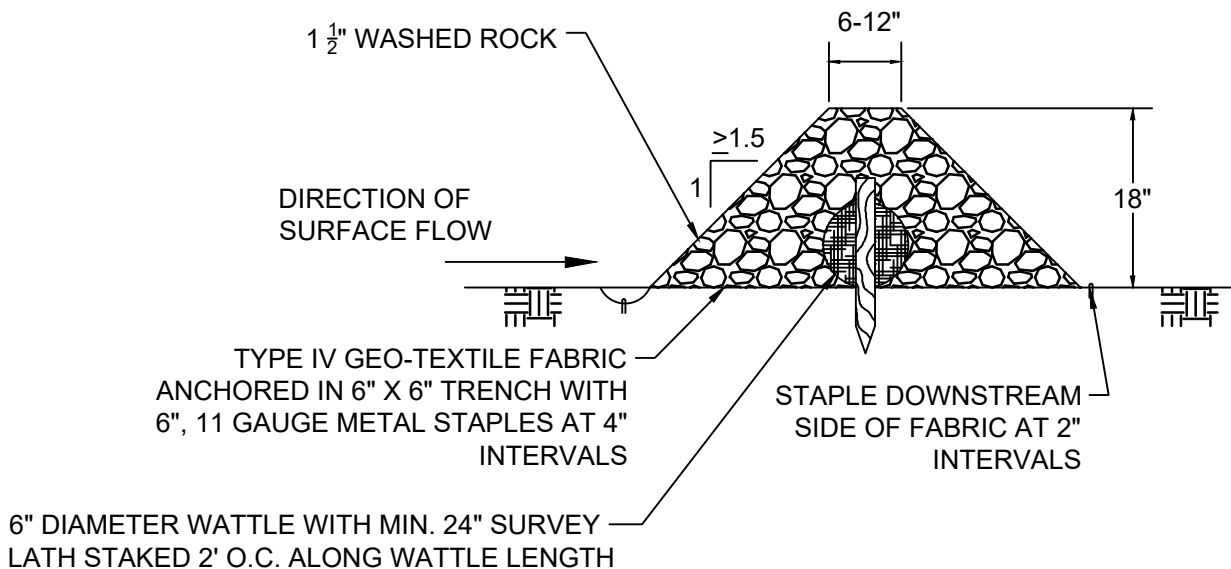

2025 Standard Detail Plates


DITCH CHECKS - ROCK AND BIO WEEPER

LAST REVISION:
06/28/2024




PLATE NO.
ERO-5B

I. SMALL CHECK DAM

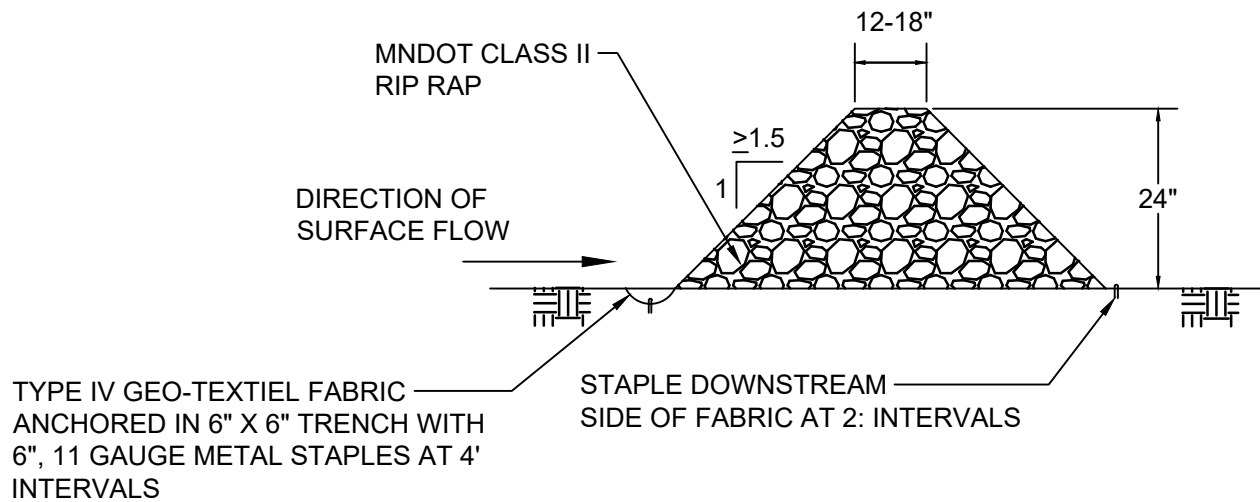

II. LARGE CHECK DAM

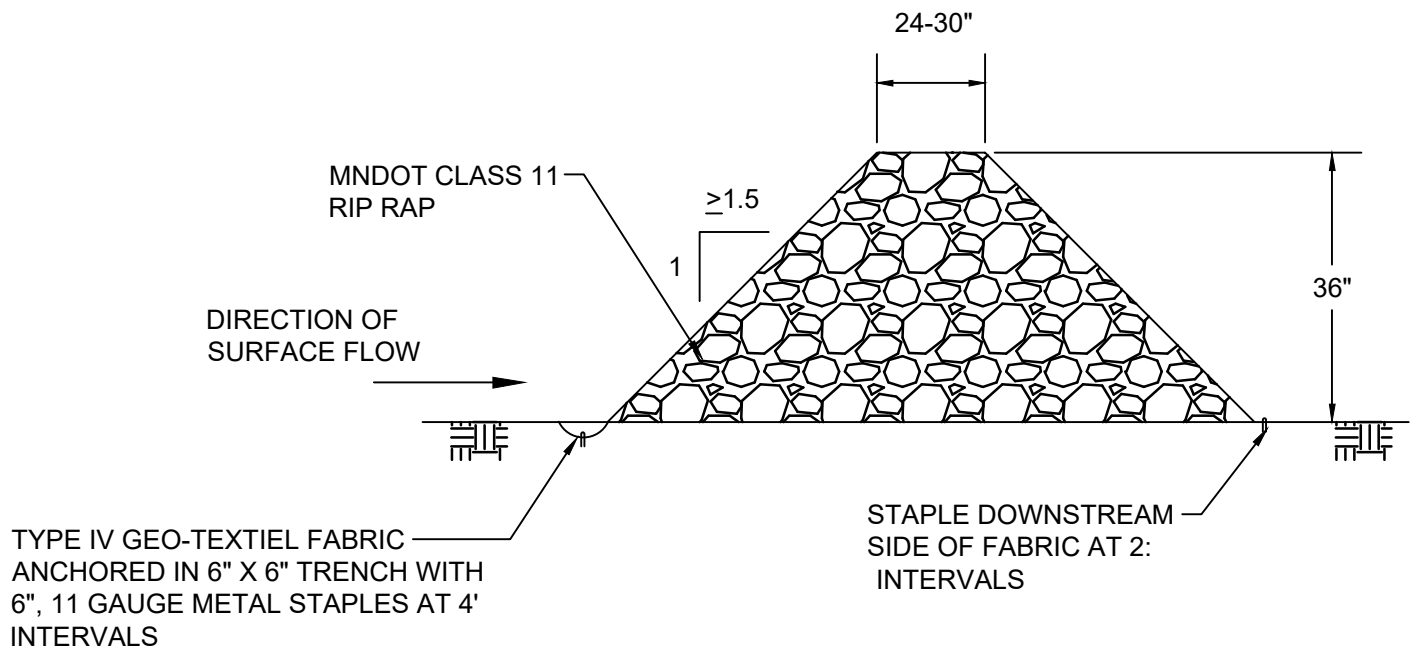


2025 Standard Detail Plates

DITCH CHECKS - SMALL AND LARGE CHECK DAM

LAST REVISION:
06/28/2024



PLATE NO.
ERO-5C

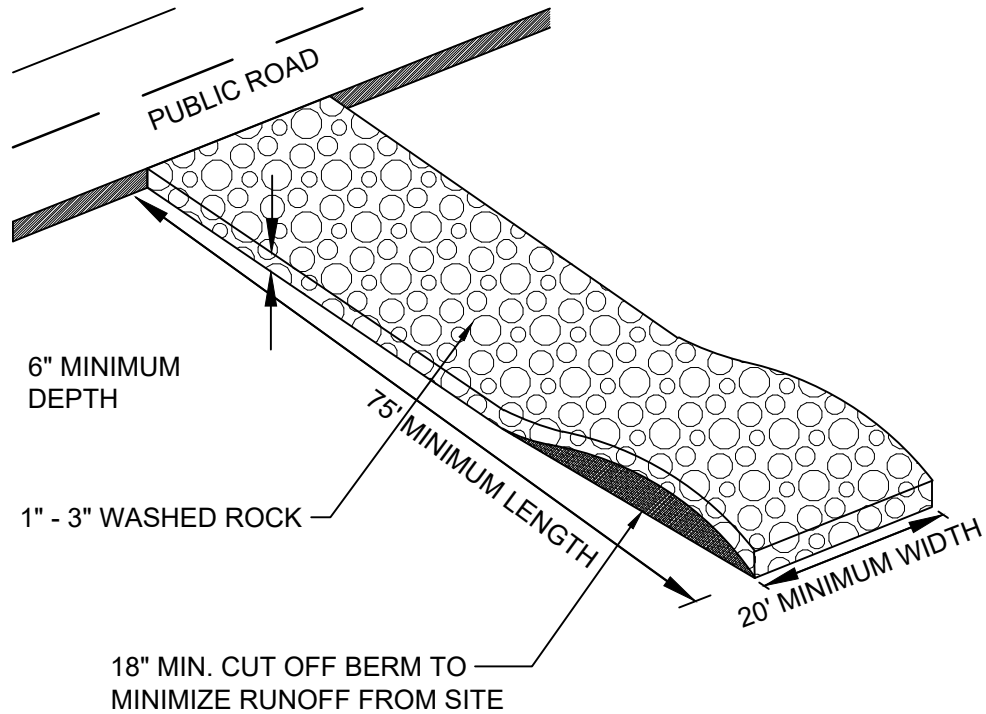

NOTE:

FILTER FABRIC SHALL BE PLACED UNDER ROCK TO STOP MUD MIGRATION THROUGH ROCK.
 ENTRANCE MUST BE MAINTAINED TO PREVENT SEDIMENTATION ON PUBLIC ROADWAYS. FUGITIVE ROCKS WILL BE REMOVED FROM ADJACENT ROADWAYS DAILY OR MORE FREQUENTLY AS NECESSARY.



2025 Standard Detail Plates


CONSTRUCTION ENTRANCE (ROCK)

LAST REVISION:
06/28/2024




PLATE NO.
ERO-6


I. PLAN VIEW

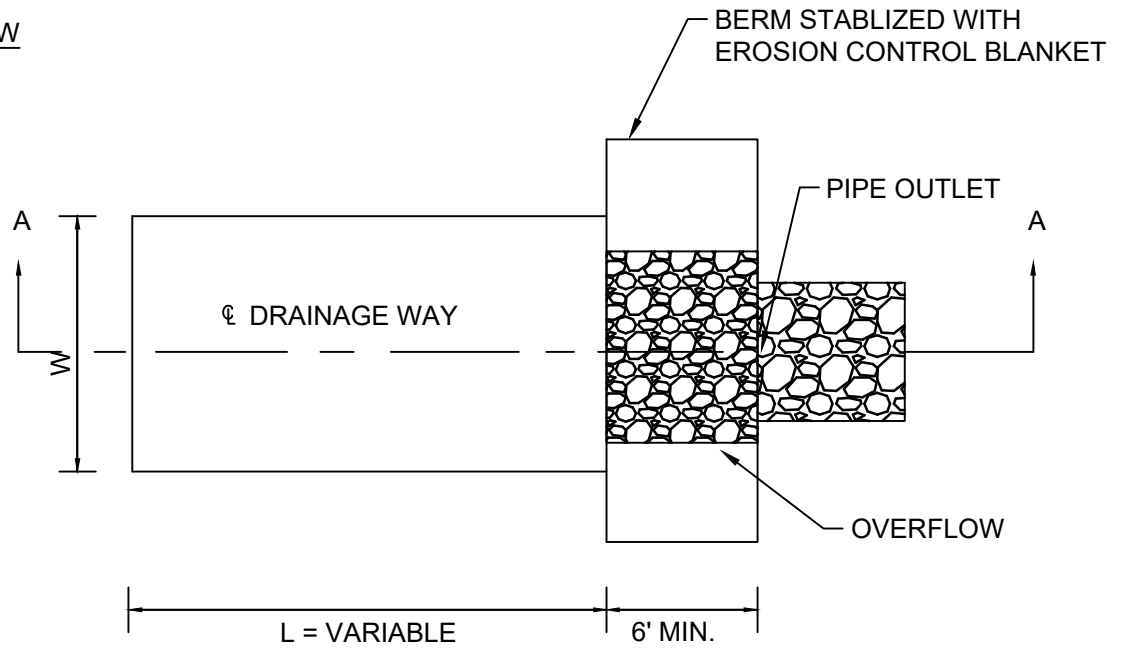

II. SECTION A-A

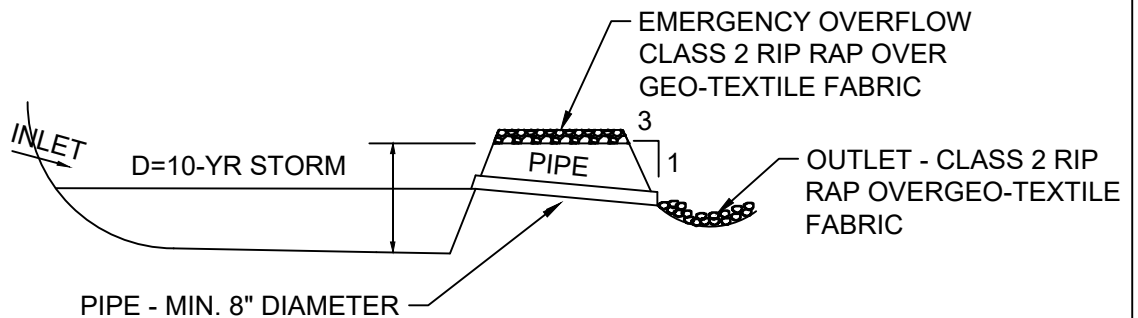

III. BASIN EMERGENCY OVERFLOW

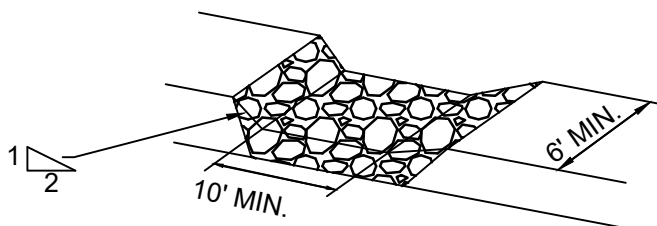

NOTES:

BASIN USED FOR 10 ACRES DRAINAGE AREA OR MORE. DESIGN RUNOFF VOLUME IS FROM A 2-YR, 24-HR STORM PER ACRE DRAINED TO THE BASIN. BASIN VOLUME MUST BE A MIN. OF 1800 CUBIC FEET/ACRE. SEE PLANS/SPECIFICATIONS FOR BASIN DIMENSIONS AND PIPE SIZE AND SLOPE.



2025 Standard Detail Plates

TEMPORARY SEDIMENTATION BASIN - PIPE OUTLET

LAST REVISION:
06/28/2024

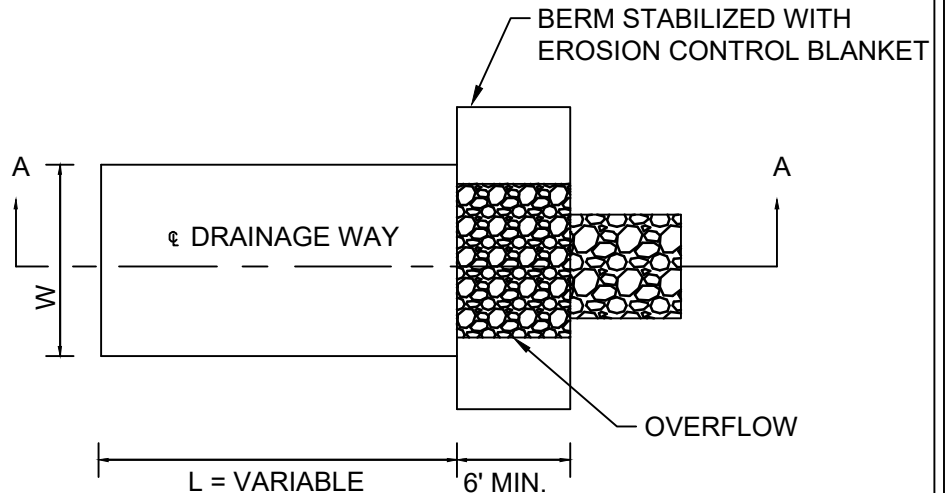


PLATE NO.
ERO-7A


I. PLAN VIEW

NOTES:


BASIN USED FOR 10 ACRES DRAINAGE AREA OR MORE. DESIGN RUNOFF VOLUME IS FROM A 2-YR, 24-HR STORM PER ACRE DRAINED TO THE BASIN. BASIN VOLUME MUST BE A MIN. OF 1800 CUBIC FEET/ACRE. SEE PLANS/SPECIFICATIONS FOR BASIN DIMENSIONS AND PIPE SIZE AND SLOPE.



II. SECTION A-A

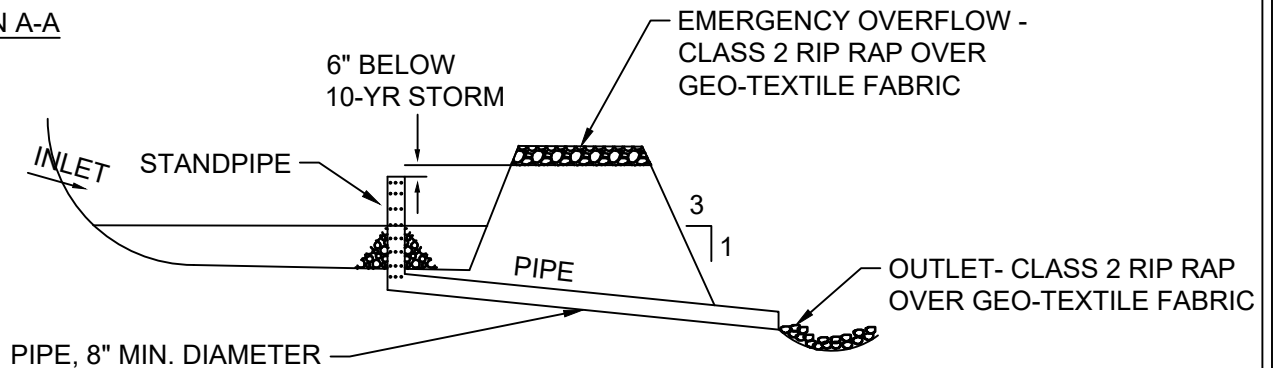

III. BASIN STANDPIPE AND EMERGENCY OVERFLOW

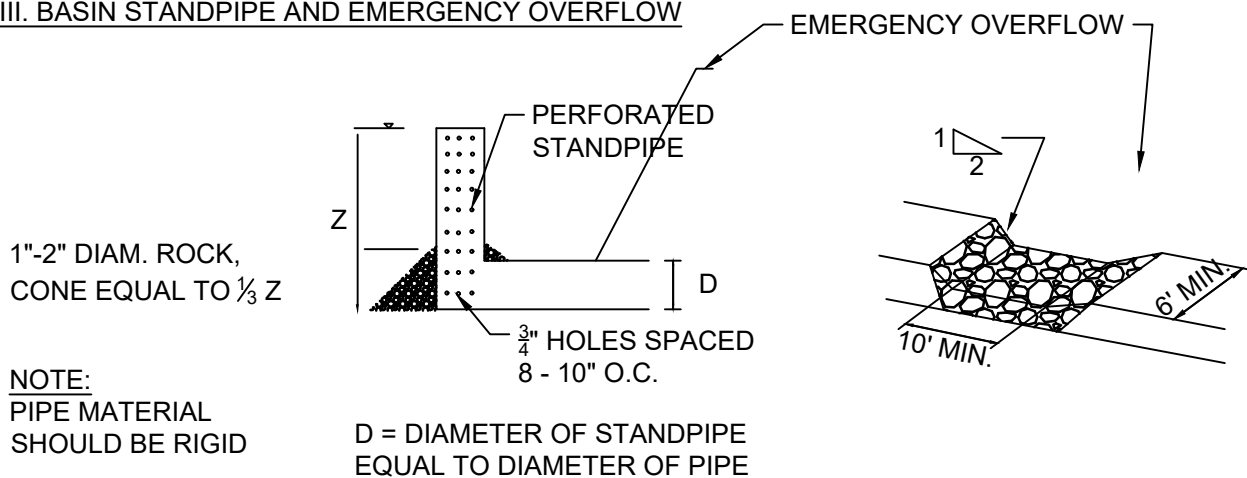

2025 Standard Detail Plates


TEMPORARY SEDIMENTATION BASIN - STANDPIPE OUTLET

LAST REVISION:
06/28/2024




PLATE NO.
ERO-7B

I. PLAN VIEW

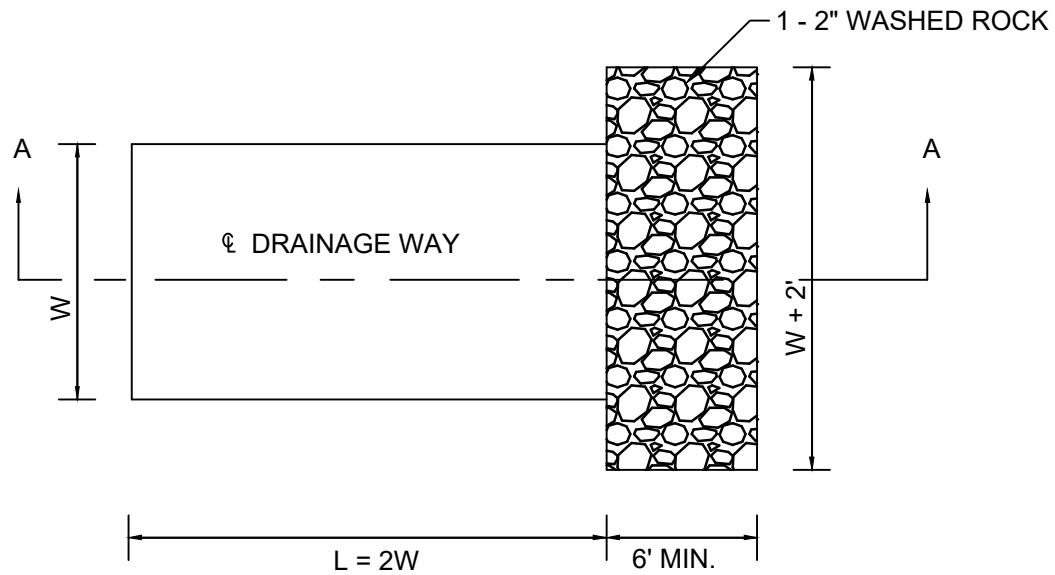

II. SECTION A-A


DIRECTION OF
SURFACE FLOW

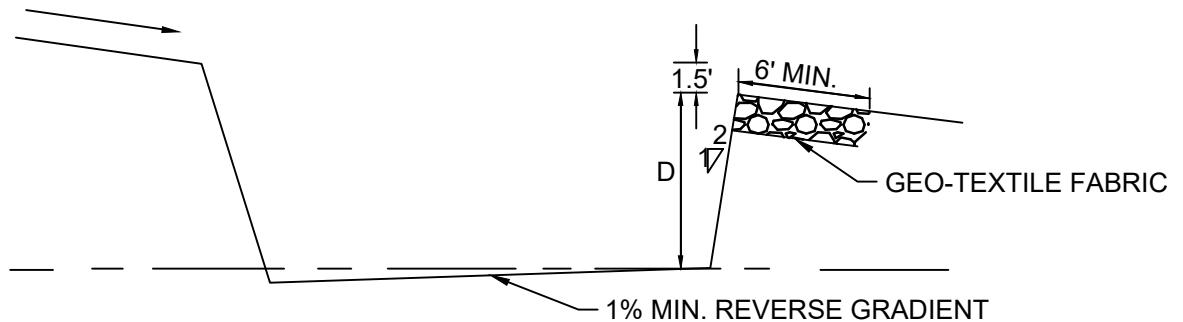

NOTE:

D=3' MIN, 5' MAX
W=10' MIN, 25' MAX W(FT.)=
10 X DRAINAGE AREA (AC.)

III. TRAP OUTLET

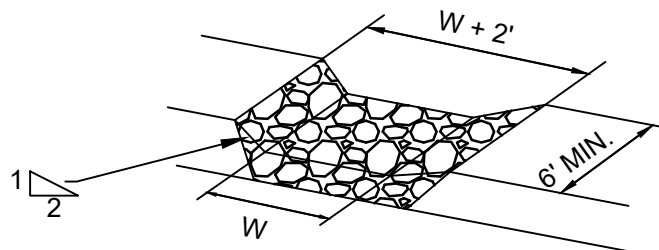

NOTES:

TRAP USED FOR 2.5 ACRES
DRAINAGE AREA OR LESS.
DESIGN VOLUME IS A MINIMUM
OF 1800 CUBIC FEET PER ACRE
OF CONTRIBUTING DRAINAGE
AREA.




2025 Standard Detail Plates

TEMPORARY SEDIMENT TRAP


LAST REVISION:
06/28/2024



PLATE NO.
ERO-8

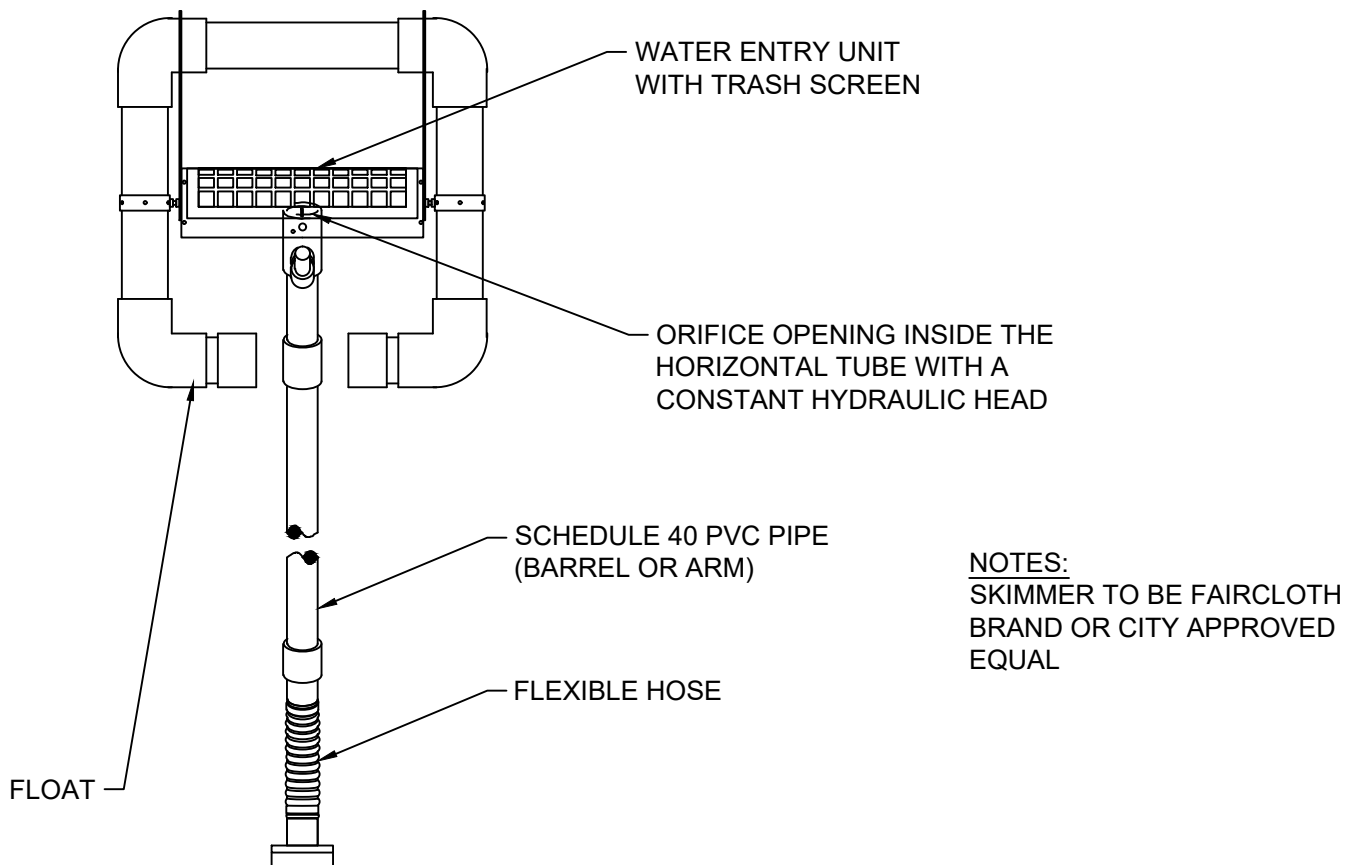

TOP VIEW

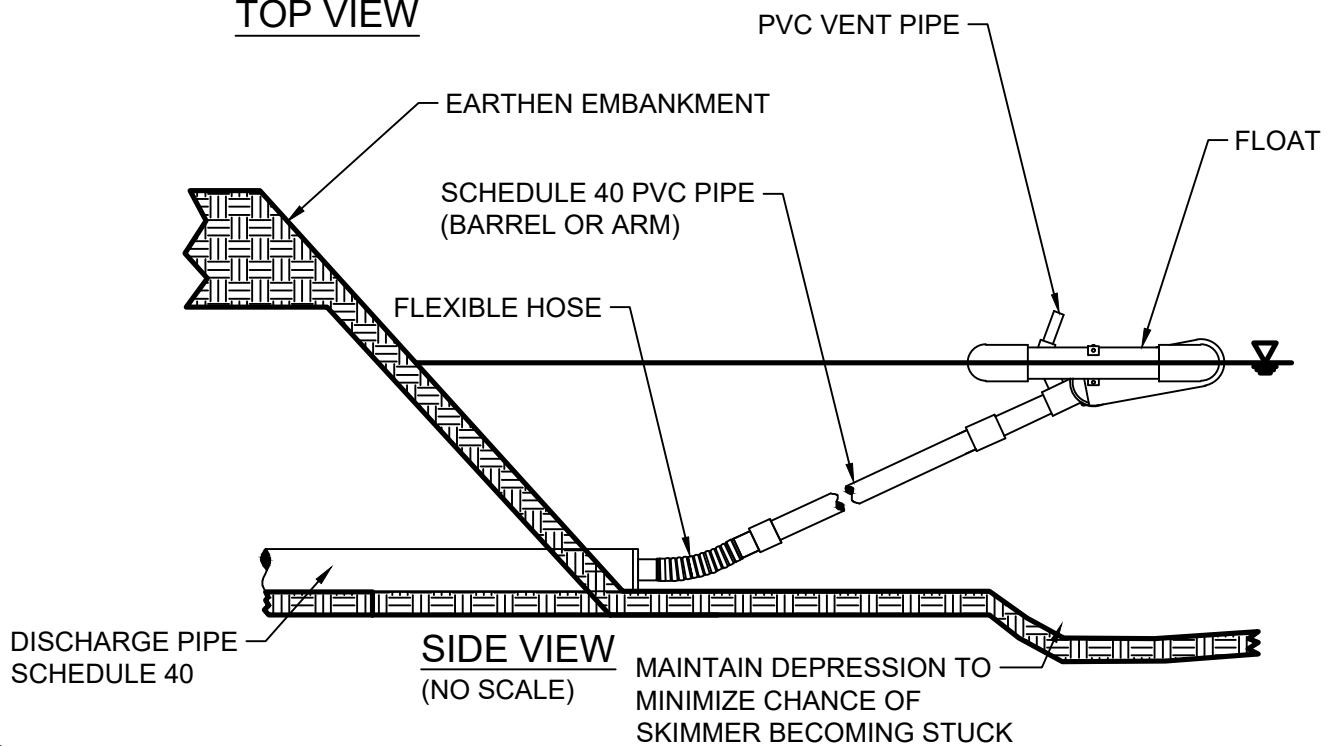

SIDE VIEW
(NO SCALE)




2025 Standard Detail Plates

TEMPORARY SEDIMENT BASIN SKIMMER

LAST REVISION:
06/28/2024



PLATE NO.
ERO-9

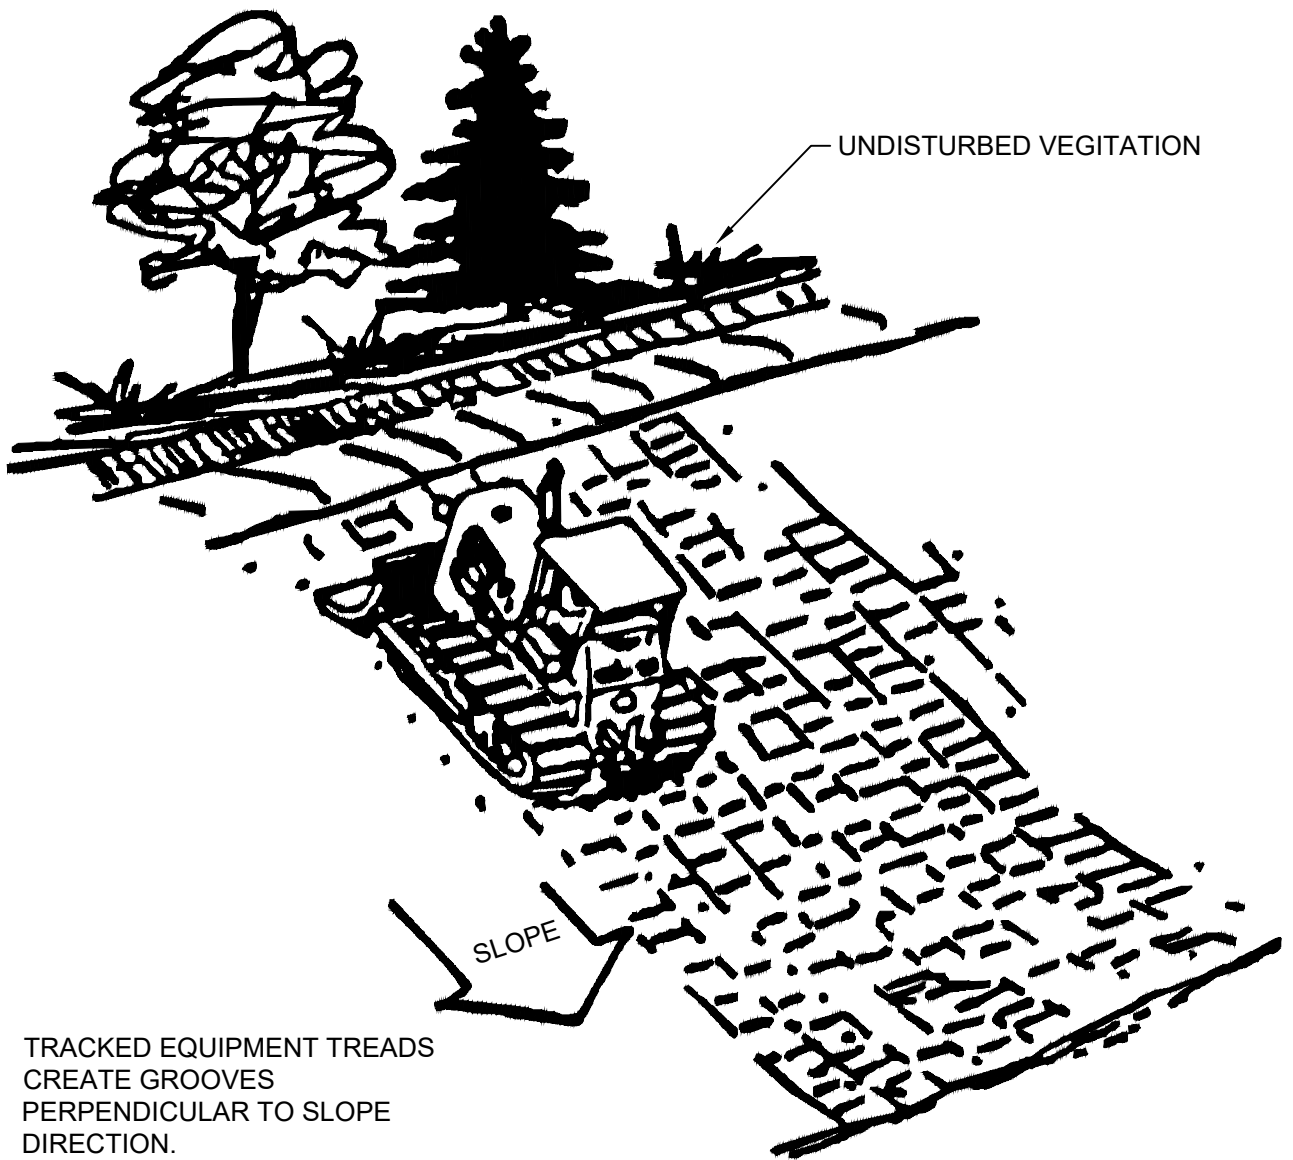

NOTE:

ALL SLOPES WITH A GRADE EQUAL TO OR STEEPER THAN 3:1 REQUIRE SLOPE TRACKING. SLOPES WITH A GRADE MORE GRADUAL THAN 3:1 REQUIRE SLOPE TRACKING IF THE STABILIZATION METHOD IS EROSION CONTROL BLANKET OR HYDROMULCH.



2025 Standard Detail Plates

SLOPE TRACKING

LAST REVISION:
06/28/2024



PLATE NO.
ERO-10